

Aspire 4935/4935G Series Service Guide

Service guide files and updates are available on the ACER/CSD web; for more information, please refer to <http://csd.acer.com.tw>

PRINTED IN TAIWAN

Revision History

Please refer to the table below for the updates made on Aspire 4935/4935G Series service guide.

| Date | Chapter | Updates |
|------|---------|---------|
| | | |
| | | |
| | | |

Copyright

Copyright © 2008 by Acer Incorporated. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of Acer Incorporated.

Disclaimer

The information in this guide is subject to change without notice.

Acer Incorporated makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties of merchantability or fitness for any particular purpose. Any Acer Incorporated software described in this manual is sold or licensed *as is*. Should the programs prove defective following their purchase, the buyer (and not Acer Incorporated, its distributor, or its dealer) assumes the entire cost of all necessary servicing, repair, and any incidental or consequential damages resulting from any defect in the software.

Acer is a registered trademark of Acer Corporation.

Intel is a registered trademark of Intel Corporation.

Pentium and Pentium II/III are trademarks of Intel Corporation.

Other brand and product names are trademarks and/or registered trademarks of their respective holders.

Conventions

The following conventions are used in this manual:

| | |
|------------------------|--|
| SCREEN MESSAGES | Denotes actual messages that appear on screen. |
| NOTE | Gives bits and pieces of additional information related to the current topic. |
| WARNING | Alerts you to any damage that might result from doing or not doing specific actions. |
| CAUTION | Gives precautionary measures to avoid possible hardware or software problems. |
| IMPORTANT | Reminds you to do specific actions relevant to the accomplishment of procedures. |

Preface

Before using this information and the product it supports, please read the following general information.

1. This Service Guide provides you with all technical information relating to the BASIC CONFIGURATION decided for Acer's *global* product offering. To better fit local market requirements and enhance product competitiveness, your regional office MAY have decided to extend the functionality of a machine (e.g. add-on card, modem, or extra memory capability). These LOCALIZED FEATURES will NOT be covered in this generic service guide. In such cases, please contact your regional offices or the responsible personnel/channel to provide you with further technical details.
2. Please note WHEN ORDERING FRU PARTS, that you should check the most up-to-date information available on your regional web or channel. If, for whatever reason, a part number change is made, it will not be noted in the printed Service Guide. For ACER-AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code to those given in the FRU list of this printed Service Guide. You MUST use the list provided by your regional Acer office to order FRU parts for repair and service of customer machines.

| | |
|--|-----------|
| System Specifications | 1 |
| Features | 1 |
| System Block Diagram | 4 |
| Your Acer Notebook tour | 5 |
| Front View | 5 |
| Closed Front View | 6 |
| Left View | 7 |
| Right View | 8 |
| Rear View | 8 |
| Bottom View | 9 |
| Indicators | 10 |
| Easy-Launch Buttons | 10 |
| Touchpad Basics (with fingerprint reader) | 11 |
| Using the Keyboard | 12 |
| Lock Keys and embedded numeric keypad | 12 |
| Windows Keys | 13 |
| Hot Keys | 14 |
| Special Key | 15 |
| Using the System Utilities | 16 |
| Acer GridVista (dual-display compatible) | 16 |
| Hardware Specifications and Configurations | 18 |
| System Utilities | 29 |
| BIOS Setup Utility | 29 |
| Navigating the BIOS Utility | 29 |
| Information | 30 |
| Main | 31 |
| Advanced | 32 |
| Security | 35 |
| Power | 38 |
| Boot | 40 |
| Exit | 41 |
| BIOS Flash Utilities | 42 |
| DOS Flash Utility | 43 |
| WinFlash Utility | 44 |
| Remove HDD/BIOS Password Utilities | 45 |
| Miscellaneous Utilities | 48 |
| Machine Disassembly and Replacement | 51 |
| Disassembly Requirements | 51 |
| General Information | 52 |
| Pre-disassembly Instructions | 52 |
| Disassembly Process | 52 |
| External Module Disassembly Process | 53 |
| External Modules Disassembly Flowchart | 53 |
| Removing the Battery Pack | 54 |
| Removing the SD dummy card | 55 |
| Removing the ExpressCard dummy card | 56 |
| Removing the Lower Covers | 57 |
| Removing the WLAN Module | 59 |
| Removing the DIMM Modules | 60 |
| Removing the Hard Disk Drive Module | 61 |
| Removing the Optical Disk Drive Module | 63 |
| Main Unit Disassembly Process | 65 |

Table of Contents

| | |
|---|-----|
| Main Unit Disassembly Flowchart | 65 |
| Removing the Hinge Covers | 67 |
| Removing the Switch Cover | 68 |
| Removing the Keyboard | 70 |
| Removing the Function Board | 71 |
| Removing the Speaker Module | 72 |
| Removing the LCD Module | 74 |
| Removing the Upper Base | 79 |
| Removing the Finger Print Reader | 82 |
| Removing the TouchPad Bracket | 84 |
| Removing the eKey Board | 86 |
| Removing the Media Board | 87 |
| Removing the USB Board | 89 |
| Removing the Modem Module | 91 |
| Removing the Bluetooth Module | 92 |
| Removing the Mainboard | 93 |
| Removing the RJ-11 Port | 95 |
| Removing the Thermal Module | 97 |
| Removing the CPU | 99 |
| LCD Module Disassembly Process | 100 |
| LCD Module Disassembly Flowchart | 100 |
| Removing the LCD Bezel | 101 |
| Removing the Camera Module | 103 |
| Removing the LCD Panel | 104 |
| Removing the LCD Brackets and FPC Cable | 106 |
| Removing the Antennas | 107 |
| Removing the MIC Module | 108 |
| LCD Module Reassembly Procedure | 109 |
| Replacing the MIC Module | 109 |
| Replacing the Antennas | 110 |
| Replacing the LCD Panel | 113 |
| Replacing the Camera Module | 115 |
| Replacing the LCD Bezel | 116 |
| Main Module Reassembly Procedure | 117 |
| Replacing the CPU | 117 |
| Replacing the Thermal Module | 118 |
| Replacing the RJ-11 Port | 119 |
| Replacing the Mainboard | 121 |
| Replacing the Bluetooth Board | 122 |
| Replacing the Modem Module | 122 |
| Replacing the Finger Print Reader | 126 |
| Replacing the Upper Cover | 127 |
| Replacing the LCD Module | 130 |
| Replacing the Speaker Module | 134 |
| Replacing the Function Board | 135 |
| Replacing the Keyboard | 136 |
| Replacing the Switch Cover | 137 |
| Replacing the Hinge Covers | 139 |
| Replacing the ODD Module | 140 |
| Replacing the Hard Disk Drive Module | 141 |
| Replacing the DIMM Modules | 141 |
| Replacing the WLAN Module | 142 |
| Replacing the Lower Covers | 142 |
| Replacing the ExpressCard and SD Card Dummy Trays | 143 |
| Replacing the Battery | 143 |

| | |
|--|------------|
| Troubleshooting | 145 |
| Common Problems | 145 |
| Power On Issue | 146 |
| No Display Issue | 147 |
| Random Loss of BIOS Settings | 148 |
| LCD Failure | 149 |
| Built-In Keyboard Failure | 149 |
| Touchpad Failure | 150 |
| Internal Speaker Failure | 150 |
| Internal Microphone Failure | 152 |
| HDD Not Operating Correctly | 153 |
| ODD Failure | 154 |
| USB Failure (Rightside) | 157 |
| Modem Function Failure | 157 |
| Wireless Function Failure | 158 |
| Bluetooth Function Failure | 158 |
| EasyTouch Button Failure | 159 |
| Media Board Failure | 159 |
| Fingerprint Reader Failure | 160 |
| Thermal Unit Failure | 160 |
| External Mouse Failure | 161 |
| Other Failures | 161 |
| Intermittent Problems | 162 |
| Undetermined Problems | 162 |
| POST Codes Tables | 163 |
| Sec: | 163 |
| Memory: | 163 |
| BDS & Specific action: | 164 |
| Each PEIM entry point used in 80_PORT | 165 |
| Each Driver entry point used in 80_PORT | 165 |
| Each SmmDriver entry point used in 80_PORT | 168 |
| Jumper and Connector Locations | 169 |
| Top View | 169 |
| Bottom View | 170 |
| Clearing Password Check and BIOS Recovery | 171 |
| Clearing Password Check | 171 |
| BIOS Recovery by Crisis Disk | 172 |
| FRU (Field Replaceable Unit) List | 173 |
| Aspire 4935/4935G Exploded Diagrams | 174 |
| Main Module | 174 |
| Aspire 4935/4935G FRU List | 175 |
| Screw List | 182 |
| Model Definition and Configuration | 184 |
| Aspire 4935/4935G Series | 184 |
| Test Compatible Components | 223 |
| Microsoft® Windows® Vista Environment Test | 224 |
| Online Support Information | 229 |
| Index | 231 |

Table of Contents

System Specifications

Features

Below is a brief summary of the computer's many feature:

NOTE: Items marked with * denote only selected models.

Operating System

- Genuine Windows® Vista™

Platform

- Intel® Centrino® 2 processor technology, featuring:
 - Intel® Core™ 2 Duo processor
 - Mobile Intel® PM45/GM45 Express Chipset*
 - Intel® Wireless WiFi Link 5100/5300*
 - Intel® Wireless WiFi Link 5150/5350*

System Memory

- Dual-Channel SDRAM support
- Up to 2 GB of DDR2 667 MHz memory, upgradeable to 4 GB using two soDIMM modules

Display and graphics

- 16:9 aspect ratio
- 14" HD 1366 x 768
- Mobile Intel® GM45 Express Chipset (for Aspire 4935)
- NVIDIA® GeForce® 9300M GS (for Aspire 4935G)

Storage subsystem

- 2.5" hard disk drive
- Optical drive option:
 - Blu-ray Disc™ /DVD-Super Multi double-layer drive*
 - DVD-Super Multi double-layer drive*
- 6-in-1 card reader

Audio

- Dolby®-optimized surround sound system with two built-in stereo speakers
- True5.1-channel surround sound output
- High-definition audio support
- S/PDIF (Sony/Philips Digital Interface) support for digital speakers
- Acer PureZone technology with two built-in stereo microphones
- MS-Sound compatible

Communication

- Acer Video Conference, featuring:
 - Integrated Acer Crystal Eye webcam*
 - Acer PureZone technology*
 - Optional Acer Xpress VoIP phone*
- WLAN:
 - Intel® Wireless WiFi Link 5100/5300*
- Wi-Fi®/WiMAX™:
 - Intel® Wireless WiFi Link 5150/5350*
- WPAN: Bluetooth® 2.0+Enhanced Data Rate (EDR)*
- LAN: Gigabit Ethernet; Wake-on-LAN ready
- Modem: 56K ITU V.92; Wake-on-Ring ready

Dimensions and Weight

- 342 (W) x 239 (D) x 23/38.6 (H) mm (13.4 x 9.4 x 0.9/1.5 inches)
- 2.4 kg (5.30 lbs.) with 6-cell battery

Privacy control

- Acer Bio-Protection fingerprint solution*
- BIOS user, supervisor, HDD passwords
- Kensington lock slot

Power subsystem

- ACPI 3.0
- 48.8 W 4400 mAh
- 3-pin 65 W AC adapter*
- 3-pin 90 W AC adapter*
- ENERGY STAR® 4.0*

Special keys and controls

- 88-/89-/93-key keyboard
- Touchpad pointing device

I/O interface

- ExpressCard™/54 slot
- 6-in-1 card reader (SD/MMC/MMCplus™/MS/MS PRO/xD)
- USB 2.0 port
- USB 2.0 / eSATA port*

NOTE: If you plug an eSATA device you will have two USB ports available in the mean time.

- Consumer infrared (CIR) port
- HDMI™ port with HDCP support*
- External display (VGA) port


-
- Headphones/speaker/line-out jack with S/PDIF support*
 - Microphone-in jack
 - Line-in jack
 - Ethernet (RJ-45) port
 - Modem (RJ-11) port
 - DC-in jack for AC adapter

Environment

- Temperature:
 - Operating: 5 °C to 35 °C
 - Non-operating: -20 °C to 65 °C
- Humidity (non-condensing):
 - Operating: 20% to 80%
 - Non-operating: 20% to 80%

NOTE: Items marked with * denote only selected models. The specifications listed above are for reference only. The exact configuration of your PC depends on the model purchased.

System Block Diagram

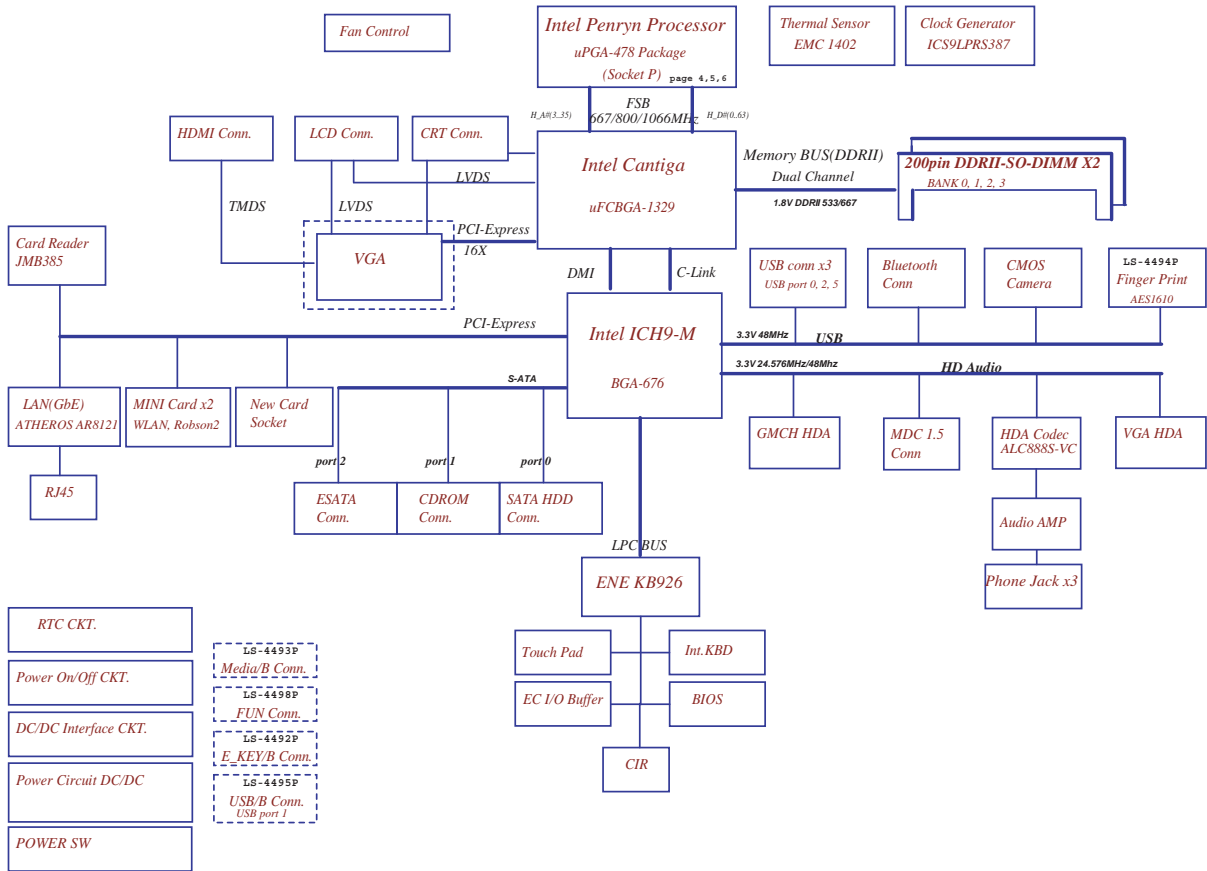




Your Acer Notebook tour

After knowing your computer features, let us show you around your new computer.

Front View





| No. | Icon | Item | Description |
|-----|---|-------------------------|---|
| 1 | | Acer Crystal Eye webcam | Web camera for video communication (only for certain models). |
| 2 |  | Microphone | Internal microphone for sound recording. |
| 3 | | Display screen | Also called Liquid-Crystal Display (LCD), displays computer output (Configuration may vary by models). |
| 4 |  | Power button | Turns the computer on and off. |
| 5 | | Status indicators | Light-Emitting Diodes (LEDs) that light up to show the status of the computer's functions and components. |
| 6 | | Keyboard | For entering data into your computer. |
| 7 | | Palmrest | Comfortable support area for your hands when you use the computer. |

| No. | Icon | Item | Description |
|-----|---|---|---|
| 8 | | Status indicators | Light-Emitting Diodes (LEDs) that light up to show the status of the computer's functions and components. |
| 9 | | Click buttons (left, center* and right) | The left and right buttons function like the left and right mouse buttons. *The center button serves as Acer Bio-Protection fingerprint reader supporting Acer FingerNav 4-way control function (only for certain models). |
| 10 | | Touchpad | Touch-sensitive pointing device which functions like a computer mouse. |
| 11 | | Acer MediaTouch keys | For use with Acer Arcade and other media playing programs. |
| 12 | | Easy-launch buttons | Buttons for launching frequently used programs. |
| 13 |  | Empowering key | Launch Acer Empowering Technology. |
| 14 | | Speakers | Left and right speakers deliver stereo audio output. |









Closed Front View



| No. | Icon | Item | Description |
|-----|---|--------------------|---|
| 1 |  | CIR receiver | Receives signals from a remote control |
| 2 |  | 6-in-1 card reader | Accepts Secure Digital (SD), MultiMediaCard (MMC), MultiMediaCardplus™ (MMCplus™), Memory Stick (MS), Memory Stick Pro (MS PRO), and xD-Picture Card. Note: Push to remove/install the card. Only one card can operate at any given time. |




Left View



| No. | Icon | Item | Description |
|-----|---|--|---|
| 1 |  | DC in jack | Connects to an AC adapter |
| 2 |  | Ethernet (RJ-45) port | Connects to an Ethernet 10/100/1000-based network. |
| 3 |  | External display (VGA) port | Connects to a display device (e.g. external monitor, LCD projector). |
| 4 | HDMI | HDMI port | Supports high definition digital video connections (only for certain models). |
| 5 |  / eSATA | USB 2.0 / eSATA port | Connects to USB 2.0 or eSATA devices (only for certain models). Note: If you plug an eSATA device you will have two USB ports available in the mean time. |
| 6 |  | USB 2.0 port | Connect to USB 2.0 devices (e.g. USB mouse, USB camera). |
| 7 |  | Headphones/speaker/line-out jack with S/PDIF support | Connects to audio line-out devices (e.g., speakers, headphones). |
| |  | Microphone jack | Accepts inputs from external microphones. |
| |  | Line-in jack | Accepts audio line-in devices (e.g., audio CD player, stereo walkman, mp3 player). |
| 8 | ExpressCard / 54 | ExpressCard/54 slot | Accepts one ExpressCard/54 module. |

Right View



| No. | Icon | Item | Description |
|-----|---|-------------------------------|--|
| 1 |  | USB 2.0 port | Connect to USB 2.0 devices (e.g. USB mouse, USB camera). |
| 2 | | Optical drive | Internal optical drive; accepts CDs or DVDs. |
| 3 | | Optical disk access indicator | Lights up when the optical drive is active. |
| 4 | | Optical drive eject button | Ejects the optical disk from the drive. |
| 5 | | Emergency eject hole | Ejects the optical drive tray when the computer is turned off. Note: Insert a paper clip into the emergency eject hole to eject the optical drive tray when the computer is off. |
| 6 |  | Modem (RJ-11) port | Connects to a phone line. |
| 7 |  | Kensington lock slot | Connects to a Kensington-compatible computer security lock. |






Rear View



| No. | Item | Description |
|-----|-------------------|---|
| 1 | Ventilation slots | Enable the computer to stay cool, even after prolonged use. |

Bottom View








| No. | Icon | Item | Description |
|-----|---|-----------------------------------|--|
| 1 |  | Battery bay | Houses the computer's battery pack. |
| 2 |  | Battery release latch | Releases the battery for removal. |
| 3 |  | Hard disk bay | Houses the computer's hard disk (secured with screws). |
| 4 |  | Memory compartment | Houses the computer's main memory. |
| 5 |  | Battery lock | Locks the battery in position. |
| 6 | | Ventilation slots and cooling fan | Enable the computer to stay cool, even after prolonged use. Note: Do not cover or obstruct the opening of the fan. |

Indicators

The computer has several easy-to-read status indicators:

The front panel indicators are visible even when the computer cover is closed.






| Icon | Function | Description |
|---|-----------|---|
|  | Power | Indicates the computer's power status. |
|  | Battery | Indicates the computer's battery status. |
|  | HDD | Indicates when the hard disk drive is active. |
|  | Num Lock | Lights up when Num Lock is activated. |
|  | Caps Lock | Lights up when Caps Lock is activated. |

NOTE: 1. **Charging:** The battery light shows amber when the battery is charging. 2. **Fully charged:** The light shows green when in AC mode.

Easy-Launch Buttons


Located beside the keyboard are application buttons. These buttons are called easy-launch buttons. They are: WLAN, Internet, email, Bluetooth, Arcade and Acer Empowering Technology.

The mail and Web browser buttons are pre-set to email and Internet programs, but can be reset by users. To set the Web browser, mail and programmable buttons, run the Acer Launch Manager.

| Icon | Function | Description |
|---|--------------------------------|--|
|  | Wireless communication switch | Enables/disables the wireless function. |
|  | Web browser | Internet browser (user-Programmable) |
|  | Mail | Email application (user-Programmable) |
|  | Bluetooth communication switch | Enables/disables the Bluetooth function. |
|  | Empowering Technology | Launch Acer Empowering Technology. (user-programmable) |

Touchpad Basics (with fingerprint reader)

The following items show you how to use the touchpad with Acer Bio-Protection fingerprint reader:

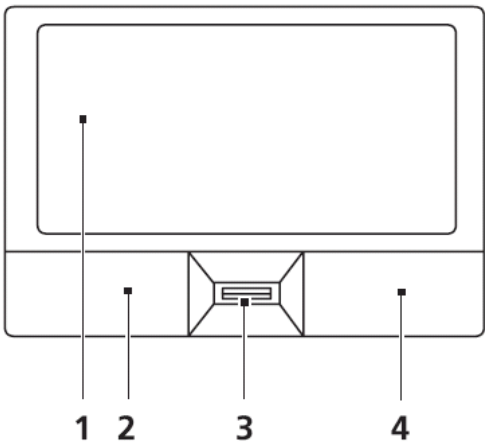

- Move your finger across the touchpad (1) to move the cursor.
- Press the left (2) and right (4) buttons located beneath the touchpad to perform selection and execution functions. These two buttons are similar to the left and right buttons on a mouse. Tapping on the touchpad is the same as clicking the left button.
- Use Acer Bio-Protection fingerprint reader (3) supporting Acer FingerNav 4-way control function (only for certain models) or the 4-way scroll (3) button (only for certain models) to scroll up or down and move left or right a page. This fingerprint reader or button mimics your cursor pressing on the right scroll bar of Windows applications.

| Function | Left Button (2) | Right Button (4) | Main touchpad (1) |
|---------------------|---|------------------|--|
| Execute | Quickly click twice. | | Tap twice (at the same speed as double-clicking a mouse button). |
| Select | Click once. | | Tap once. |
| Drag | Click and hold, then use finger on the touchpad to drag the cursor. | | Tap twice (at the same speed as double-clicking a mouse button); rest your finger on the touchpad on the second tap and drag the cursor. |
| Access context menu | | Click once. | |

NOTE: When using the touchpad, keep it - and your fingers - dry and clean. The touchpad is sensitive to finger movement; hence, the lighter the touch, the better the response. Tapping too hard will not increase the touchpad's responsiveness.

Using the Keyboard

The keyboard has full-sized keys and an embedded numeric keypad, separate cursor, lock, Windows, function and special keys.

Lock Keys and embedded numeric keypad

The keyboard has three lock keys which you can toggle on and off.






















| Lock key | Description |
|--------------------------|--|
| Caps Lock | When Caps Lock is on, all alphabetic characters typed are in uppercase. |
| Num Lock <Fn> + <F11> | When Num Lock is on, the embedded keypad is in numeric mode. The keys function as a calculator (complete with the arithmetic operators +, -, *, and /). Use this mode when you need to do a lot of numeric data entry. A better solution would be to connect an external keypad. |
| Scroll Lock <Fn> + <F12> | When Scroll Lock is on, the screen moves one line up or down when you press the up or down arrow keys respectively. Scroll Lock does not work with some applications. |

The embedded numeric keypad functions like a desktop numeric keypad. It is indicated by small characters located on the upper right corner of the keycaps. To simplify the keyboard legend, cursor-control key symbols are not printed on the keys.

| Desired access | Num Lock on | Num Lock off |
|--|--|--|
| Number keys on embedded keypad | Type numbers in a normal manner. | |
| Cursor-control keys on embedded keypad | Hold <Shift> while using cursor-control keys. | Hold <Fn> while using cursor-control keys. |
| Main keyboard keys | Hold <Fn> while typing letters on embedded keypad. | Type the letters in a normal manner. |

Windows Keys

The keyboard has two keys that perform Windows-specific functions.

| Key | Description |
|---|--|
|  Windows key | <p>Pressed alone, this key has the same effect as clicking on the Windows Start button; it launches the Start menu. It can also be used with other keys to provide a variety of functions:</p> <ul style="list-style-type: none"><  >: Open or close the Start menu<  > + <D>: Display the desktop<  > + <E>: Open Windows Explore<  > + <F>: Search for a file or folder<  > + <G>: Cycle through Sidebar gadgets<  > + <L>: Lock your computer (if you are connected to a network domain), or switch users (if you're not connected to a network domain)<  > + <M>: Minimizes all windows<  > + <R>: Open the Run dialog box<  > + <T>: Cycle through programs on the taskbar<  > + <U>: Open Ease of Access Center<  > + <X>: Open Windows Mobility Center<  > + <BREAK>: Display the System Properties dialog box<  > + <SHIFT+M>: Restore minimized windows to the desktop<  > + <TAB>: Cycle through programs on the taskbar by using Windows Flip 3-D<  > + <SPACEBAR>: Bring all gadgets to the front and select Windows Sidebar<CTRL> + <  > + <F>: Search for computers (if you are on a network)<CTRL> + <  > + <TAB>: Use the arrow keys to cycle through programs on the taskbar by using Windows Flip 3-D <p>Note: Depending on your edition of Windows Vista, some shortcuts may not function as described.</p> |
|  Application key | <p>This key has the same effect as clicking the right mouse button; it opens the application's context menu.</p> |

Hot Keys

The computer employs hotkeys or key combinations to access most of the computer's controls like screen brightness, volume output and the BIOS utility.

To activate hot keys, press and hold the <Fn> key before pressing the other key in the hotkey combination.



| Hotkey | Icon | Function | Description |
|-------------|----------------|---------------------------|---|
| <Fn> + <F1> | ? | Hotkey help | Displays help on hotkeys. |
| <Fn> + <F2> | | Acer eSettings Management | Launches Acer eSettings Management in Acer Empowering Technology. |
| <Fn> + <F3> | | Acer ePower Management | Launches Acer ePower Management in Acer Empowering Technology. |
| <Fn> + <F4> | z ^z | Sleep | Puts the computer in Sleep mode. |
| <Fn> + <F5> | | Display toggle | Switches display output between the display screen, external monitor (if connected) and both. |
| <Fn> + <F6> | | Screen blank | Turns the display screen backlight off to save power. Press any key to return. |
| <Fn> + <F7> | | Touchpad toggle | Turns the internal touchpad on and off. |
| <Fn> + <F8> | | Speaker toggle | Turns the speakers on and off. |
| <Fn> + <▷> | | Brightness up | Increases the screen brightness. |
| <Fn> + <◁> | | Brightness down | Decreases the screen brightness. |

Special Key

You can locate the Euro symbol and the US dollar sign at the upper-center and/or bottom-right of your keyboard.



The Euro symbol

1. Open a text editor or word processor.
2. Hold <Alt Gr> and then press the <5> key at the upper-center of the keyboard.

NOTE: Note: Some fonts and software do not support the Euro symbol. Please refer to www.microsoft.com/typography/faq/faq12.htm for more information.

The US dollar sign

1. Open a text editor or word processor.
2. Hold <Shift> and then press the <4> key at the upper-center of the keyboard.


NOTE: This function varies by the operating system version.

Using the System Utilities

Acer Bio-Protection (only for certain models) Acer Bio-Protection Fingerprint Solution is a multi-purpose fingerprint software package integrated with the Microsoft Windows operating system. Utilizing the uniqueness of one's fingerprint features, Acer Bio-Protection Fingerprint Solution has incorporated protection against unauthorized access to your computer with centralized password management with Password Bank, easy music player launching with Acer MusicLaunch, secure Internet favorites via Acer MyLaunch, and fast application/website launching and login with Acer FingerLaunch, while Acer ProfileLaunch can launch up to three applications/websites from a single finger swipe.

Acer Bio-Protection Fingerprint Solution also allows you to navigate through web browsers and documents using Acer FingerNav. With Acer Bio-Protection Fingerprint Solution, you can now enjoy an extra layer of protection for your personal computer, as well as the convenience of accessing your daily tasks with a simple swipe of your finger!

For more information refer to the Acer Bio-Protection help files.

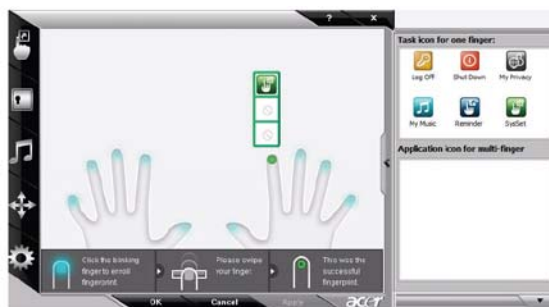

Acer GridVista (dual-display compatible)

NOTE: This feature is only available on certain models.

To enable the dual monitor feature of the notebook, first ensure that the second monitor is connected, then select **Start, Control Panel, Display** and click on **Settings**. Select the secondary monitor (**2**) icon in the display box and then click the check box **Extend my windows desktop onto this monitor**. Finally, click **Apply** to confirm the new settings and click **OK** to complete the process.



Acer GridVista is a handy utility that offers four pre-defined display settings so you can view multiple windows on the same screen. To access this function, please go to **Start → All Programs** and click on **Acer GridVista**. You may choose any one of the four display settings indicated below:




Double (vertical), Triple (primary at left), Triple (primary at right), or Quad Acer Gridvista is dual-display compatible, allowing two displays to be partitioned independently.

Acer Gridvista is dual-display compatible, allowing two displays to be partitioned independently.

AcerGridVista is simple to set up:

1. Run Acer GridVista and select your preferred screen configuration for each display from the task bar.
2. Drag and drop each window into the appropriate grid.
3. Enjoy the convenience of a well-organized desktop.

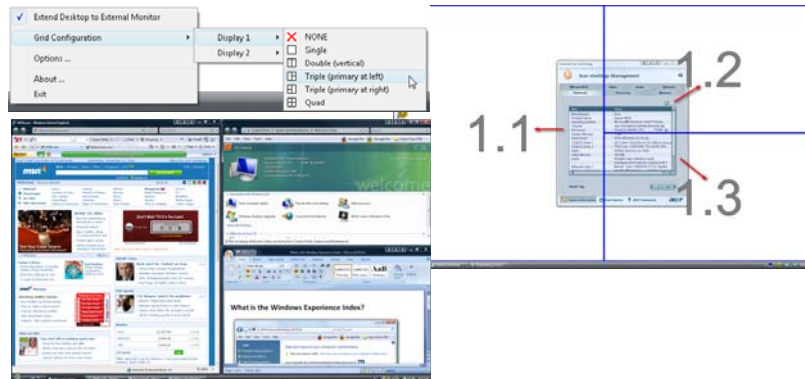

NOTE: Please ensure that the resolution setting of the second monitor is set to the manufacturer's recommended value.

Hardware Specifications and Configurations

Processor

| Item | Specification |
|------------------|---|
| CPU Type | Intel Mobile Penryn uPGA, Socket P, 6M L2, FSB 800/1066MHz (see Processor Specification below for more information) |
| Core Logic | Intel Cantiga GM—for Aspire 4935 (800/1066MHz FSB supported) Intel Cantiga PM—for Aspire 4935G (800/1066MHz FSB supported) ICH9-M |
| CPU Package | Micro uPGA-478 Package |
| CPU Core Voltage | Refer to table below |

Processor Specifications

| Processor # | CPU Speed | Cores | Bus Speed | Mfg Tech | Cache Size | Package | Core Voltage | Acer P/N |
|-------------|-----------|-------|-----------|----------|------------|---------|-----------------|--------------|
| P9500 | 2.53 GHz | 2 | 1066 MHz | 45 nm | 6 MB | uPGA | 1.050V - 1.162V | KC.95001.DPP |
| T5800 | 2.0 GHz | 2 | 800 MHz | 45 nm | 2 MB | uPGA | 1.0375 - 1.3 V | KC.58001.DTP |
| T5900 | 2.2 GHz | 2 | 800 MHz | 45 nm | 2 MB | uPGA | 1.0375 - 1.3 V | KC.59001.DTP |
| P8400 | 2.26 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | 1.00V-1.250V | KC.84001.DPP |
| P8600 | 2.4 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | 1.00V-1.250V | KC.86001.DPP |
| T9400 | 2.53 GHz | 2 | 1066 MHz | 45 nm | 6 MB | uPGA | 1.050V - 1.162V | KC.94001.DTP |
| T9600 | 2.8 GHz | 2 | 1066 MHz | 45 nm | 6 MB | uPGA | 1.050V-1.162V | KC.96001.DTP |
| P7350 | 2.0 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | 1.00V-1.250V | KC.73501.DPP |
| P7450 | 2.13 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | | KC.74501.DPP |
| T9550 | 2.66 GHz | 2 | 1066 MHz | 45 nm | 6 MB | uPGA | | KC.95501.DTP |
| T6400 | 2.0 GHz | 2 | 800 MHz | 45 nm | 3 MB | uPGA | | KC.64001.DTP |
| T6600 | 2.2 GHz | 2 | 800 MHz | 45 nm | 2 MB | uPGA | | KC.66001.DTP |
| P8700 | 2.53 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | | KC.87R01.DPP |
| P8600 | 2.4 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | 1.00V-1.250V | KC.86R01.DPP |
| P8400 | 2.26 GHz | 2 | 1066 MHz | 45 nm | 3 MB | uPGA | 1.00V-1.250V | KC.84R01.DPP |

System Board Major Chips

| Item | Specifications |
|-------------------|--|
| Core logic | Intel Cantiga PM / GM (667/800/1066MHz FSB supported) ICH9-M |
| VGA | <ul style="list-style-type: none"> NB9MGS-512MB-DDR2 Integrated VGA solution for CANTIGA GM / On board VGA card for CANTIGA PM |
| LAN | ATHEROS AR8121 for Giga LAN |
| Media Card Reader | JMICRON JMB385 |

| Item | Specifications |
|-------------|--|
| Audio Codec | REALTEK ALC888S-VC for High Definition Audio Codec with Dolby Digital Live |

CPU Fan True Value Table

| CPU Temperature (°C) | | Fan Speed (rpm) | SPL Spec (dBA) |
|----------------------|--------|-----------------|----------------|
| Core1 | Core 2 | | |
| 50 | 50 | - | - |
| 66 | 66 | 3200 | 31 |
| 74 | 74 | 3500 | 34 |
| 85 | 85 | 3900 | 37 |
| 100 | 100 | 4300 | 40 |

- Throttling 50%: On =100°C; Off=90°C
- OS Shut down: 105°C
- H/W Shut down: 96°C

BIOS ROM

| Item | Specification |
|-----------------------|--|
| BIOS Vendor | Insyde H20 |
| BIOS Version | V0.09 |
| BIOS ROM Type | Flash ROM |
| BIOS ROM Size | 1 MB |
| Supported Protocols | <ul style="list-style-type: none">• Support ISIPP• Support Acer UI• Support multi-boot• Suspend to RAM (S3)/Disk (S4)• Various hot-keys for system control• Support SMBUS 2.0, PCI2.3• ACPI 2.0 compliance with Intel Speed Step Support C1, C2, C3, C4 and S3, S4 for mobile CPU• DMI utility for BIOS serial number configurable/asset tag• Support PXE• Support Y2K solution• Support Win Flash Wake on LAN from S3• Wake on LAN form S4 in AC mode• System information |
| BIOS Password control | Supervisor, User, and HDD |

System Memory

| Item | Specifications |
|---------------------------------|--|
| Memory Controller | Onboard |
| Memory Size | 0MB (No on-board Memory) |
| DIMM socket number | 2 sockets |
| Supports Memory size per socket | 2 GB |
| Support maximum memory size | 4 GB for 64bit OS (with two 2GB SO-DIMM) |
| Support DIMM type | DDR II Synchronous DRAM |
| Support DIMM Speed | 667/800 MHz |
| Support DIMM voltage | 1.8V |
| Support DIMM package | 200-pin DDR II-667/800 SO-DIMM |
| Cache | 6MB L2 on CPU |
| VGA Memory | 512 MB with optional adjustable 128MB UMA VGA memory share from North Bridge |
| Memory module combinations | You can install memory modules in any combination as long as they match the above specifications |

Memory Combinations

| Slot 1 | Slot 2 | Total Memory |
|--------|--------|--------------|
| 0MB | 512MB | 512MB |
| 0MB | 1024MB | 1024MB |
| 0MB | 2048MB | 2048MB |
| 512MB | 512MB | 1024MB |
| 512MB | 1024MB | 1536MB |
| 512MB | 2048MB | 2560MB |
| 1024MB | 0MB | 1024MB |
| 1024MB | 512MB | 1536MB |
| 1024MB | 1024MB | 2048MB |
| 1024MB | 2048MB | 3072MB |
| 2048MB | 0MB | 2048MB |
| 2048MB | 512MB | 2560MB |
| 2048MB | 1024MB | 3072MB |
| 2048MB | 2048MB | 4096MB |

NOTE: Above table lists some system memory configurations. You may combine DIMMs with various capacities to form other combinations. On above table, the configuration of slot 1 and slot 2 could be reversed.

Hard Disk Drive Interface

| Item | Specifications | | | | |
|---|------------------------|---------------------------------------|------------------------|--|--|
| Vendor & Model Name | Seagate ST9250827AS | Seagate ST9320320AS ST9160310AS | Seagate ST9500325AS | Toshiba MK3252GSX MK2552GSX MK1652GSX | WD WD5000BEVT WD3200BEVT WD2500BEVT WD1600BEVT |
| Capacity (MB) | 250 | 320, 160 | 500 | 320, 250, 160 | 500, 320, 250, 160 |
| Bytes per sector | 512 | 512 | 512 | 512 | 512 |
| Data heads | 4 | 4, 2 | 4 | 4, 4, 2 | 4, 3, 2, 2 |
| Drive Format | | | | | |
| Disks | 2 | 2 or 1, 1 | 2 | 2, 2, 1 | 2, 2, 1, 1 |
| Spindle speed (RPM) | 5400 | 5400 | 5400 | 5400 | 5400 |
| Performance Specifications | | | | | |
| Buffer size | 8 MB | 8 MB | 8 MB | 8 MB | 8 MB |
| Interface | SATA | SATA | SATA | SATA | SATA |
| Internal transfer rate (Mbits/sec, max) | 778 | 352 | 1,175 | 400 ~ 794 typical | 106 Mbits/s maximum |
| I/O data transfer rate (Mbytes/sec max) | 300 | 150 | 300 | 300 | 300 maximum |
| DC Power Requirements | | | | | |
| Voltage | 5V ±5% | 5V ±5% | 5V ±5% | 5V ±5% | 5V ±5% |

Super-Multi Combo Module

| Item | Specification | |
|---------------------------|---|---------------------------------|
| Vendor & model name | Philips DS-8A2S, Toshiba Digi/TS-L633A | |
| Performance Specification | With CD Diskette | With DVD Diskette |
| Transfer rate (MB/sec) | Sustained: Max 3.5 Mbytes/sec | Sustained: Max 10 Mbytes/sec |
| Buffer Memory | 2MB | |
| Interface | SATA | |
| Applicable disc format | Applicable media types: Writing: Confirms to DVD+R Version 1.2 and DVD+RW Version 1.3 / DVD+R DL Version 1.0 /DVD-R Version 2.0 / DVD-RW Version 1.2 / DVD-R DL Version 3.0. Reading: DVD single/dual layer (PTP, OTP), DVD-R single/dual layer DVD+R single/double layer DVD-RW DVD+RW CD-DA CD-ROM CD-ROM/XA Photo-CD, Multi-session, Video CD CD-I FMV, CD Extra, CD Plus, CD-R, and CD-RW | |
| Loading mechanism | Drawer (Solenoid Open) Tact SW (Open) Emergency Release (draw open hole) | |
| Power Requirement | | |
| Input Voltage | DC 5 V +/- 5% | |

Super-Multi Combo Module (continued)

| Item | Specification | | | |
|---------------------------|---|--|-------------------------------|--------------------------------|
| Vendor & model name | HLDS GT10N | | Sony AD7580S | |
| Performance Specification | With CD Diskette | With DVD Diskette | With CD Diskette | With DVD Diskette |
| Transfer rate (MB/sec) | Sustained: 3,600 KB/s (24x) max. | Sustained: 11.08 Mbytes/s (8x) max. | Sustained: 1,571 (typical) | Sustained: 10,993 (typical) |
| Buffer Memory | 2 MB | | | |
| Interface | SATA | | | |
| Applicable disc formats | <div> <ul style="list-style-type: none"> DVD-ROM: <ul style="list-style-type: none"> 4.7GB (Single Layer) 8.5GB (Dual Layer) DVD-R: <ul style="list-style-type: none"> 3.95GB (Ver. 1.0: read only) 4.7GB (Ver. 2.0 for Authoring: read only) 4.7GB (Ver. 2.1 for General: read & write) (DL) 8.5GB (Ver. 3.0) DVD-RW: <ul style="list-style-type: none"> 4.7GB (Ver. 1.2/ Rev 1.0, 2.0, 3.0) DVD-RAM: 1.46GB/side, 4.7GB/side (Ver. 2.2) DVD+R: 4.7GB (Ver. 1.3) <ul style="list-style-type: none"> (DL) 8.5GB (Ver. 1.1) DVD+RW: <ul style="list-style-type: none"> 4.7GB (Vol.1 Ver.1.3) CD-ROM Mode-1 data disc CD-ROM Mode-2 data disc CD-ROM XA, CD-I, Photo-CD Multi-Session, Video CD CD-Audio Disc Mixed mode CD-ROM disc (data and audio) CD-Extra CD-Text CD-R (Conforming to "Orange Book Part 2": read & write) CD-RW (Conforming to "Orange Book Part 3": read & write) </div> | | | |
| Loading mechanism | Drawer (Solenoid Open) Tact SW (Open) Emergency Release (draw open hole) | | | |
| Power Requirement | | | | |
| Input Voltage | DC 5 V +/- 5% | | | |

Blueray Combo Drive

| Item | Specification |
|------------------------|--|
| Manufacturer and Model | Sony NEC Optiarc BC-5500S-AR |
| Type | Drawer loading |
| Interface | SATA |
| Data Transfer Modes | <ul style="list-style-type: none">• PIO mode• DMA• Ultra DMA33 |
| Buffer Memory Size | 4.5 MB |
| Maximum Write Speed | 11 Mbytes/sec |
| Maximum Read Speed | 9 Mbytes/sec |
| Formats Supported | <p>Read</p> <ul style="list-style-type: none">• BD-Video (12cm, Single and Dual Layer), BD-ROM (12cm, Single and Dual Layer)• DVD-Video (8cm/12cm, Single and Dual Layer), DVD-ROM (8cm/12cm, Single and Dual Layer), Multi-Boarder, Multi-Session <p>CD Write</p> <ul style="list-style-type: none">• CD-R Media (48x/40x/32x/24x/16x/8x) Mitsubishi (Verbatim), Taiyo-Yuden, Mitsui, Ricoh, Fuji film, Sony, Hitachi Maxell, Memorex, RITEK, CMC, P.V.C, JVC, SKC, ACER, Prime Disc, TDK• CD-RW Media (10x/4x) Ricoh, Mitsubishi (Verbatim), ACER, OPTROM, Memorex, P.V.C, RITEK, CMC, LEADDATA, GigaStorage, Prodisc, Fornex, Samsung, Philips <p>DVD Write</p> <ul style="list-style-type: none">• DVD+R Media (16x/8x/4x/2.4x) Taiyo-Yuden, Mitsubishi (Verbatim), Ricoh, TDK• DVD+R Double Layer Media (8x/2.4x) Mitsubishi (Verbatim)• DVD+RW Media (8x/4x/2.4x) Mitsubishi (Verbatim), Ricoh, TDK• DVD-R Media (16x/8x/4x/2x) Mitsubishi (Verbatim), TDK, Taiyo-Yuden, PVC, Fuji Film, Ritek• DVD-R DL Media (8x/4x) Mitsubishi (Verbatim)• DVD-RW Media (6x/4x/2x/1x) JVC, PVC, Mitsubishi (Verbatim), TDK• DVD-RAM Ver2.2 Media (5x/3x/2x) Panasonic, Hitachi Maxell |
| Power Supply | +5V (DC) |
| Voltage Allowance | +5V (DC) $\pm 5\%$ |

LCD 14"

| Item | Specification | | | |
|--|--|----------|------|------|
| Vendor/model name | <ul style="list-style-type: none">• Samsung LTN140AT01-G01• AUO B140XW01• LG LP140WH1• CMO N140B6 - L02 | | | |
| Screen Diagonal (mm) | 355.6 (14.0") | | | |
| Display Area (mm) | 309.399(H) X 173.952(V) | | | |
| Display resolution (pixels) | 1366 x 768 | | | |
| Pixel Pitch | 0.2265(H) x 0.2265(V) | | | |
| Display Mode | Normally white | | | |
| Typical White Luminance (cd/m ²) (also called Brightness) | 220 (typ.) | | | |
| Contrast Ratio (typical) | 500 | | | |
| Response Time (Optical Rise Time/Fall Time) msec | 8 (typ.) | | | |
| Input Voltage | 3.3V ±0.3V | | | |
| Typical Power Consumption (watt) | 5W (max.) | | | |
| Weight | 375g (max.) | | | |
| Physical Size (mm) | 324.0(H) x 192.5(V) x 5.2(D) | | | |
| Electrical Interface | LVDS | | | |
| Support Color | 262,144 | | | |
| Viewing Angle (degree) | | | Min. | Typ. |
| | Horizontal | CR => 10 | 40 | 45 |
| | | | 40 | 45 |
| | Vertical | | 10 | 15 |
| | | | 25 | 30 |
| Temperature Range (°C) | | | | |
| Operating | 0 to 50°C | | | |
| Storage (shipping) | -20 to 60°C | | | |

VGA Graphic Controller

| Item | Specification |
|----------|-------------------|
| Type | NB9MGS-512MB-DDR2 |
| Features | • |
| Power | |
| Package | |

Keyboard

| Item | Specification |
|--|----------------|
| Keyboard Controller | ENE KB926 |
| Total number of keypads | 88-/89-/93-key |
| Windows logo key | Yes |
| Internal & external keyboard work simultaneously | Yes |

Media Card Reader

| Item | Specification |
|----------|--------------------|
| Type | JMICRON JMB385 |
| Features | 5-in-1 Card Reader |

Audio Interface

| Item | Specification |
|-------------------------------|---|
| Audio Controller | REALTEK ALC888S-VC |
| Audio onboard or option | Onboard |
| Mono or Stereo | Stereo |
| Internal Microphone | AC-coupled input,100mV _{P-P} maximum |
| Internal speaker/ Quantity | 2 * 4 Ohm 2W Main Speakers |

LAN

| Item | Specification |
|----------|-----------------------------|
| Type | ATHEROS AR8121 for GIGA LAN |
| Features | 10/100/1000 MHz |

CIR

| Item | Specification |
|----------|---------------|
| Type | |
| Features | • |
| Power | |
| Package | |

Bluetooth

| Item | Specification |
|----------|---------------|
| Type | |
| Features | • |
| Power | |

Finger Print Reader

| Item | Specification |
|----------|---------------|
| Features | • |
| Power | |
| Package | |

WLAN

| Item | Specification |
|-----------|---------------|
| Chipset | • |
| Protocol | |
| Interface | |
| Antenna | |

Battery

| Item | Specifications (3S2P) |
|------------------------|---|
| Vendor & model name | <ul style="list-style-type: none">• SONY AS-2007A• Panasonic AS-2007A• Simplo AS-2007A• Sanyo AS-2007A |
| Battery Type | Li-ion |
| Pack capacity | 4400 mAh |
| Number of battery cell | 6 |
| Package configuration | 3S2P |

System Utilities

BIOS Setup Utility

The BIOS Setup Utility is a hardware configuration program built into your computer's BIOS (Basic Input/Output System).

Your computer is already properly configured and optimized, and you do not need to run this utility. However, if you encounter configuration problems, you may need to run Setup. Please also refer to Chapter 4 Troubleshooting when problem arises.

To activate the BIOS Utility, press **F2** during POST (when "Press <F2> to enter Setup" message is prompted on the bottom of screen).

Press **F2** to enter setup. The default parameter of F12 Boot Menu is set to "disabled". If you want to change boot device without entering BIOS Setup Utility, please set the parameter to "enabled".

Press **<F12>** during POST to enter multi-boot menu. In this menu, user can change boot device without entering BIOS SETUP Utility.

Navigating the BIOS Utility

There are six menu options: Information, Main, Advanced, Security, Boot, and Exit.

Follow these instructions:

- To choose a menu, use the left and right arrow keys.
- To choose an item, use the up and down arrow keys.
- To change the value of a parameter, press **F5** or **F6**.
- A plus sign (+) indicates the item has sub-items. Press **Enter** to expand this item.
- Press **Esc** while you are in any of the menu options to go to the Exit menu.
- In any menu, you can load default settings by pressing **F9**. You can also press **F10** to save any changes made and exit the BIOS Setup Utility.

NOTE: You can change the value of a parameter if it is enclosed in square brackets. Navigation keys for a particular menu are shown on the bottom of the screen. Help for parameters are found in the Item Specific Help part of the screen. Read this carefully when making changes to parameter values. **Please note that system information is subject to different models.**

Information

The Information screen displays a summary of your computer hardware information.

| InsydeH20 Setup Utility | | | | | | Rev 3.5 |
|---|----------------|-----------------------|-------------------|-------|------|---------|
| Information | Main | Advanced | Security | Power | Boot | Exit |
| CPU Type: Intel(R) Core(tm)2 Duo CPU P7350 @ 2.00 GHz | | | | | | |
| CPU Speed: 2.00 GHz | | | | | | |
| HDD Model Name: ST9160310AS | | | | | | |
| HDD Serial Number: 5SV06JJS | | | | | | |
| ATAPI Model Name: Slimtype DVD A DS8A2S | | | | | | |
| System BIOS Version: V0.09 | | | | | | |
| VGA BIOS Version: Intel V1659 | | | | | | |
| Serial Number: | | | | | | |
| Asset Tag Number: | | | | | | |
| Product Name: Aspire 4935 | | | | | | |
| Manufacturer Name: Acer | | | | | | |
| UUID: 21401492-B677-3996-B6BB-001EECCA8F37 | | | | | | |
| F1 Help | ↑↓ Select Item | F5/F6 Change Values | F9 Setup Default | | | |
| ESC Exit | ←→ Select Menu | Enter Select► Submenu | F10 Save and Exit | | | |

NOTE: The system information is subject to different models.

| Parameter | Description |
|---------------------|--|
| CPU Type | This field shows the CPU type and speed of the system. |
| CPU Speed | This field shows the speed of the CPU. |
| HDD Model Name | This field shows the model name of HDD installed on primary IDE master. |
| HDD Serial Number | This field displays the serial number of HDD installed on primary IDE master. |
| ATAPI Model Name | This field shows the model name of the Optical device installed in the system. |
| System BIOS Version | Displays system BIOS version. |
| VGA BIOS Version | This field displays the VGA firmware version of the system. |
| Serial Number | This field displays the serial number of this unit. |
| Asset Tag Number | This field displays the asset tag number of the system. |
| Product Name | This field shows product name of the system. |
| Manufacturer Name | This field displays the manufacturer of this system. |
| UUID Number | Universally Unique Identifier (UUID) is an identifier standard used in software construction, standardized by the Open Software Foundation (OSF) as part of the Distributed Computing Environment (DCE). |

Main

The Main screen allows the user to set the system time and date as well as enable and disable boot option and recovery.

| InsydeH20 Setup Utility | | | | | | Rev 3.5 |
|-------------------------|------|----------------|--------------|-----------------------|------|--|
| Information | Main | Advanced | Security | Power | Boot | Exit |
| | | | | | | Item Specific Help |
| System Time | | | [13:04:04] | | | This is the help for the hour field. Valid range is from 0 to 23. INCREASE/REDUCE : F5/F6 |
| System Date | | | [10/10/2008] | | | |
| Total Memory | | | 3071 MB | | | |
| Video Memory | | | [64MB] | | | |
| Quick Boot | | | [Enabled] | | | |
| Network Boot | | | [Enabled] | | | |
| F12 Boot Menu | | | [Disabled] | | | |
| D2D Recovery | | | [Enabled] | | | |
| SATA Mode | | | [ACHI] | | | |
| | | | | | | |
| F1 Help | | ↑↓ Select Item | | F5/F6 Change Values | | F9 Setup Default |
| ESC Exit | | ←→ Select Menu | | Enter Select▶ Submenu | | F10 Save and Exit |

NOTE: The screen above is for your reference only. Actual values may differ.


The table below describes the parameters in this screen. Settings in **boldface** are the default and suggested parameter settings.

| Parameter | Description | Format/Option |
|---------------|---|---------------------------------------|
| System Time | Sets the system time. The hours are displayed with 24-hour format. | Format: HH:MM:SS (hour:minute:second) |
| System Date | Sets the system date. | Format MM/DD/YYYY (month/day/year) |
| Total Memory | This field reports the total memory size. Memory size is fixed to 3071 MB. | N/A |
| Video Memory | This field reports the video Memory size. | N/A |
| Quick Boot | Enables the boot sequence to skip some processes to boot up more quickly. | Option: Enabled or Disabled |
| Network Boot | Enables, disables the system boot from LAN (remote server). | Option: Enabled or Disabled |
| F12 Boot Menu | Enables or disables the Press <F12> to display boot menu message during startup. | Option: Enabled or Disabled |
| D2D Recovery | Enables, disables D2D Recovery function. The function allows the user to create a hidden partition on hard disc drive to store operation system and restore the system to factory defaults. | Option: Enabled or Disabled |
| SATA Mode | Control the mode in which the SATA controller should operate. | Option: ACHI or IDE |

Advanced

The Advanced screen allows the user to configure the various advanced BIOS options.

IMPORTANT: Making incorrect settings to items on these pages may cause the system to malfunction. Unless you have experience adjusting these items, we recommend that you leave these settings at the default values. If making settings to items on these pages causes your system to malfunction or prevents the system from booting, open BIOS and choose Load Optimal Defaults in the Exit menu to boot up normally.

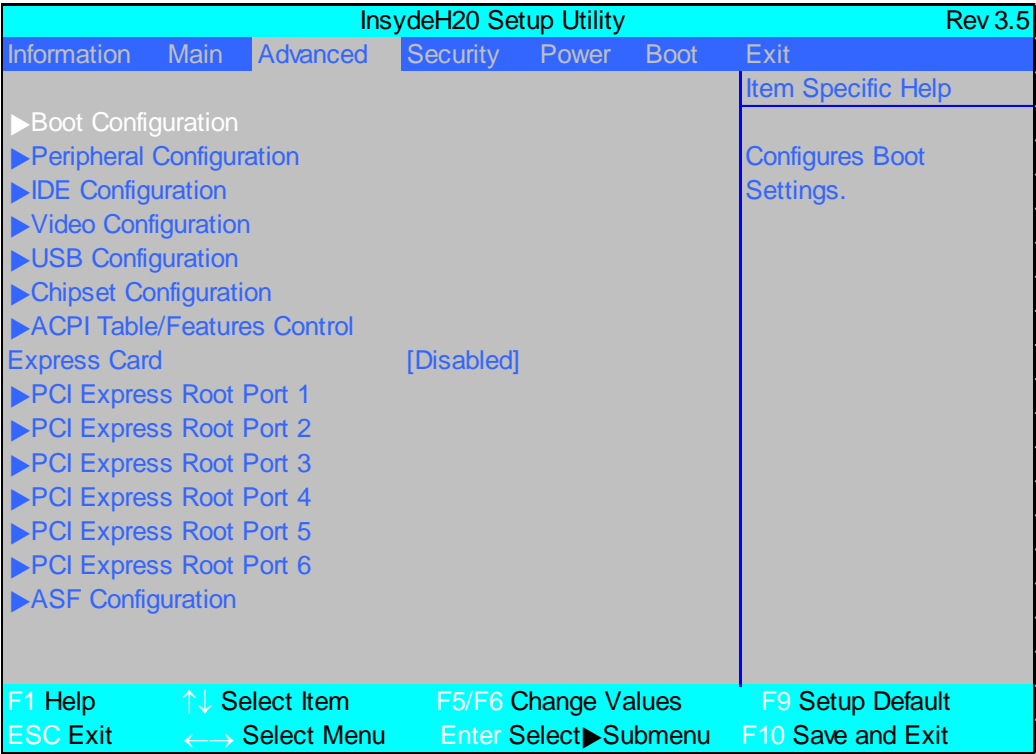

The table below describes the parameters in this screen. Settings in **boldface** are the default and suggested parameter settings.


| Parameter | Description | Submenu Items |
|--------------------------|--|---|
| Boot Configuration | Enter the Boot Configuration menu. | <ul style="list-style-type: none">• Numlock |
| Peripheral Configuration | Enter the Peripheral Configuration menu. | <ul style="list-style-type: none">• Serial Port A• Infrared Port• Azalia• Lan |
| IDE Configuration | Enter the IDE Configuration menu. | <ul style="list-style-type: none">• IDE Controller• HDC Configure as• AHCI Option ROM Support• SATA Port 0, 1, 4, and 5 Hotplug▶ Channel 1 to 4 Master▶ Channel 1 to 4 Slave |

| Parameter | Description | Submenu Items |
|----------------------------------|---|---|
| Video Configuration | Enter the Video Configuration menu. | <ul style="list-style-type: none"> • Render Standby • IGD - Device2, Function1 • IGD - Pre-allocat Memory • IGD - DVMt Size • Clock Chip Initialize • Enabled CK SSC • IGD - Boot Type • IGD - LCD Panel Type • IGD - TV • IGD - PAVP Mode |
| USB Configuration | Enter the USB Configuration menu. | <ul style="list-style-type: none"> • USB Legacy • EHCI 1 and 2 • UCHI 1 to 5 • Per-Port Control • Usb Port 0 to 11 |
| Chipset Configuration | Enter the Chipset Configuration menu. | <ul style="list-style-type: none"> • Port 80h Cycles • DMI Link ASPM • PCI Latency Timer • VT-d • iTPM |
| ACPI Tables/ Features Control | Enter the ACPI Tables/ Features Control menu. | <ul style="list-style-type: none"> • FACP - C2 Latency Value • FACP - C3 Latency Value • FACP - RTC S4 Wakeup • APIC - IO APIC Mode • HPET - HPET Support • Base Address select |
| Express Card | Enable or disable Express Card functionality. | Option: Enabled or Disabled . |
| PCI Express Root Port 1 | Enter the PCI Express Root Port 1 menu. NOTE: Disabling Root Port 1 also disables ports 2 to 6. | <ul style="list-style-type: none"> • PCI Express Root Port 1 • VC1 Cable • ASPM • Automatic ASPM • ASPM L0s • ASPM L1 • URR • FER • NFER • CER • CTO • SEFE • SENFE • SECE • PME Interrupt • PME SCI • Hotplug SCI |

| Parameter | Description | Submenu Items |
|--------------------------------|--|---|
| PCI Express Root Port <i>n</i> | Enter the PCI Express Root Port 2 to 6 menus. NOTE: <i>n</i> = port number 2 to 6. | <ul style="list-style-type: none"> • PCI Express Root Port <i>n</i> • VC1 Cable • ASPM • Automatic ASPM • URR • FER • NFER • CER • CTO • SEFE • SENFE • SECE • PME Interrupt • PME SCI • Hotplug SCI |
| ASF Configuration | Enter the ASF Configuration menu. | <ul style="list-style-type: none"> • Mini Watchdog Timeout • BIOS Boot Timeout • OS Boot Timeout • Power-on wait time |

Security

The Security screen contains parameters that help safeguard and protect your computer from unauthorized use.

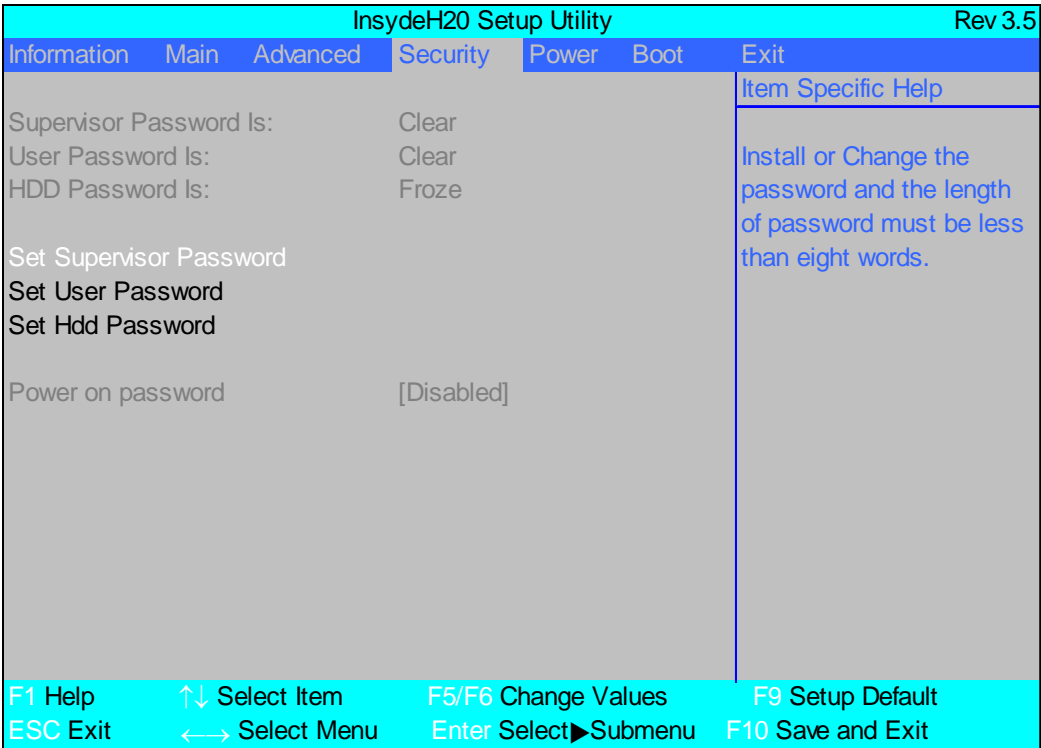

The table below describes the parameters in this screen. Settings in **boldface** are the default and suggested parameter settings.

NOTE: The following sub-options are all requires the Supervisor password for changes and should be grayed out if the user password was used to enter setup.

| Parameter | Description | Option |
|-------------------------|--|------------------------------|
| Supervisor Password Is | Shows the setting of the Supervisor password | Clear or Set |
| User Password Is | Shows the setting of the user password. | Clear or Set |
| HDD Password Is | Shows the setting of the hard disk password. | Clear, Set, or Frozen |
| Set Supervisor Password | Press Enter to set the supervisor password. When set, this password protects the BIOS Setup Utility from unauthorized access. The user can not either enter the Setup menu nor change the value of parameters. | N/A |
| Set User Password | Press Enter to set the user password. When user password is set, this password protects the BIOS Setup Utility from unauthorized access. The user can enter Setup menu only and cannot change parameters. | N/A |
| Set Hdd Password | Press Enter to set the Hdd password. When Hdd password is set, this password protects the Hdd from unauthorized access. | N/A |
| Power on password | Defines whether a password is required or not while the system powers on. | Disabled or Enabled |

NOTE: When you are prompted to enter a password, you have three tries before the system halts. Don't forget your password. If you forget your password, you may have to return your notebook computer to your dealer to reset it.

Setting a Password

Follow these steps as you set the user or the supervisor password:

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Supervisor Password box appears:

| | |
|-------------------------|-----|
| Set Supervisor Password | |
| Enter New Password | [] |
| Confirm New Password | [] |

2. Type a password in the “Enter New Password” field. The password length can not exceeds 8 alphanumeric characters (A-Z, a-z, 0-9, not case sensitive). Retype the password in the “Confirm New Password” field.

IMPORTANT: Be very careful when typing your password because the characters do not appear on the screen.

3. Press **Enter**. After setting the password, the computer sets the User Password parameter to “Set”.
4. If desired, you can opt to enable the Password on boot parameter.
5. When you are done, press F10 to save the changes and exit the BIOS Setup Utility.

Removing a Password

Follow these steps:

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Password box appears:

| | |
|-------------------------|-----|
| Set Supervisor Password | |
| Enter current password | [] |
| Enter New Password | [] |
| Confirm New Password | [] |

2. Type the current password in the Enter Current Password field and press **Enter**.
3. Press **Enter** twice **without** typing anything in the Enter New Password and Confirm New Password fields. The computer then sets the Supervisor Password parameter to “Clear”.
4. When you have changed the settings, press u to save the changes and exit the BIOS Setup Utility.

Changing a Password

1. Use the ↑ and ↓ keys to highlight the Set Supervisor Password parameter and press the **Enter** key. The Set Password box appears.

| | | |
|-------------------------|---|---|
| Set Supervisor Password | | |
| Enter current password | [|] |
| Enter New Password | [|] |
| Confirm New Password | [|] |

2. Type the current password in the Enter Current Password field and press **Enter**.
3. Type a password in the Enter New Password field. Retype the password in the Confirm New Password field.
4. Press **Enter**. After setting the password, the computer sets the User Password parameter to “Set”.
5. If desired, you can enable the Password on boot parameter.
6. When you are done, press F10 to save the changes and exit the BIOS Setup Utility.

If the verification is OK, the screen will display as following.

| |
|--------------------------|
| Setup Notice |
| Changes have been saved. |
| [continue] |

The password setting is complete after the user presses **Enter**.

If the current password entered does not match the actual current password, the screen will show you the Setup Warning.


| |
|-------------------|
| Setup Warning |
| Invalid password |
| Re-enter Password |
| [continue] |

If the new password and confirm new password strings do not match, the screen will display the following message.

| |
|-----------------------|
| Setup Warning |
| Password do not match |
| Re-enter Password |

Power

The Power screen allows the user to configure CPU and power management options.

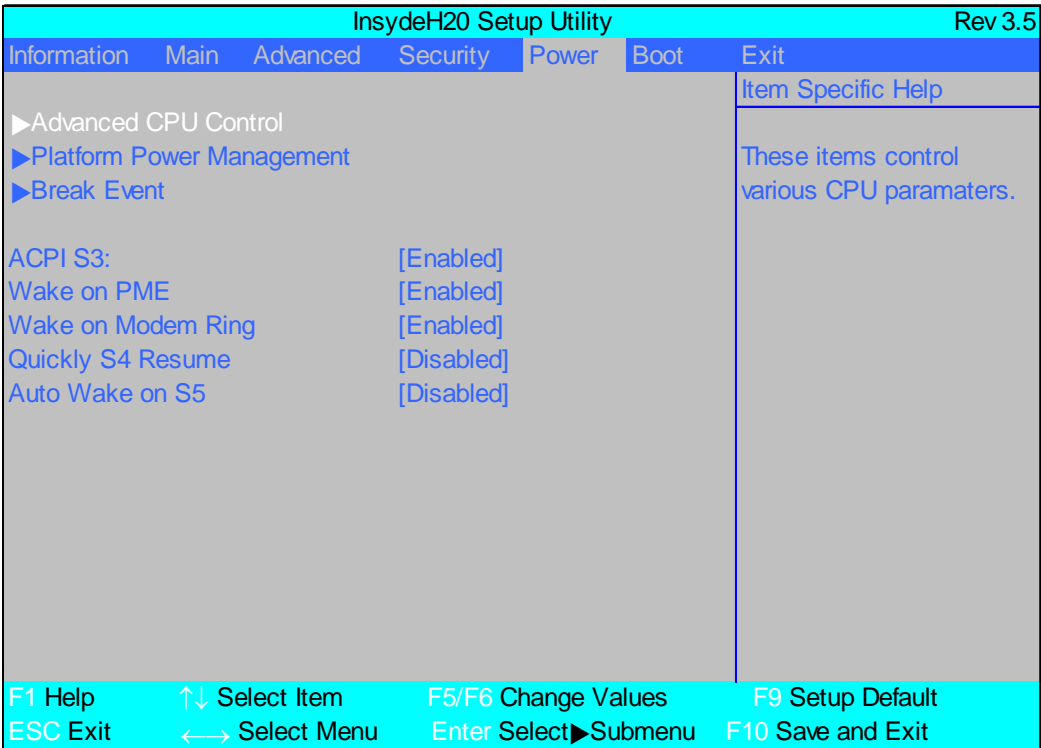

The table below describes the items, menus, and submenus in this screen. Settings in **boldface** are the default and suggested parameter settings.

| Parameter | Description | Submenu Items |
|----------------------|--------------------------------------|---|
| Advanced CPU Control | Enter the Advanced CPU Control menu. | <ul style="list-style-type: none">• P-States (IST)• Boot performance mode• Thermal Mode• CMP Support• Use XD capability• VT Support• SMRR Support• C-States• Enhanced C-States• C-State Pop Up Mode• C-State Pop Down Mode• C4 Exit Timing Mode• DeepC4• Hard C4E• Enable C6• EMTTM• Bi-directional PROCHOT#• Dynamic FSB Switching• Turbo Mode• ACPI 3.0 T-States• DTS• DTS Calibration• Thermal Trip Points Setting (Fan On Temp., Throttle On Temp.) |

| Parameter | Description | Submenu Items |
|---------------------------|---|---|
| Platform Power Management | Enter the Platform Power Management menu. | <ul style="list-style-type: none"> • PCI Clock Run |
| Break Event | Enter the Break Event menu. | <ul style="list-style-type: none"> • Storage Break Event • PCIE Break Event • PCI Break Event • EHCI Break Event • UHCI Break Event • HDA Break Event |
| ACPI S3 | Enable or Disable ACPI S1/S3 Sleep State. | N/A |
| Wake on PME | Enable or Disable wake up when the system power is off and a PCI Power Management Enable wake up event occurs. | N/A |
| Wake on Modem Ring | Enable or Disable wake up when the system power is off and a modem attached to the serial port is ringing. | N/A |
| Quickly S4 Resume | Disable or Enable optional quick boot from S4 Resume. | N/A |
| Auto wake on S5 | Disable or Enable auto wake up by date and time or at a fixed time everyday. | N/A |

Boot

This menu allows the user to decide the order of boot devices to load the operating system. Bootable devices includes the USB diskette drives, the onboard hard disk drive and the DVD drive in the module bay.

InsydeH20 Setup Utility

Rev 3.5

InformationMainAdvancedSecurityPowerBootExit

Item Specific Help

Use <↑> or <↓> to select a device, then press <F5> to move it down the list, or <F6> to move it up the list. Press <Esc> to escape the menu

Boot priority order:

1. IDE0 : ST9160310AS

2. IDE1 : Slimtype DVD A DS8A2S

3. USB FFD :

4. Network Boot : Atheros Boot Agent

5. USB HDD :

6. USB CDROM :

F1 Help

ESC Exit

↑↓ Select Item

←→ Select Menu

F5/F6 Change Values

Enter Select

F9 Setup Default

F10 Save and Exit

SubMenu

Exit

The Exit screen allows you to save or discard any changes you made and quit the BIOS Utility.

| InsydeH20 Setup Utility | | | | | | Rev 3.5 |
|--|----------------|-----------------------|----------|-------------------|------|--|
| Information | Main | Advanced | Security | Power | Boot | Exit |
| Exit Saving Changes Exit Discarding Changes Load Setup Defaults Discard Changes Save Changes | | | | | | Item Specific Help |
| | | | | | | Exit System Setup and save your changes to CMOS. |
| F1 Help | ↑↓ Select Item | F5/F6 Change Values | | F9 Setup Default | | |
| ESC Exit | ←→ Select Menu | Enter Select▶ SubMenu | | F10 Save and Exit | | |

The table below describes the parameters in this screen.

| Parameter | Description |
|-------------------------|---|
| Exit Saving Changes | Exit System Setup and save your changes to CMOS. |
| Exit Discarding Changes | Exit utility without saving setup data to CMOS. |
| Load Setup Default | Load default values for all SETUP item. |
| Discard Changes | Load previous values from CMOS for all SETUP items. |
| Save Changes | Save Setup Data to CMOS. |

BIOS Flash Utilities

The BIOS flash memory update is required for the following conditions:

- New versions of system programs
- New features or options
- Restore a BIOS when it becomes corrupted.

Use the Phlash utility to update the system BIOS flash ROM.

NOTE: If you do not have a crisis recovery diskette at hand, then you should create a **Crisis Recovery Diskette** before you use the Phlash utility.

NOTE: Do not install memory-related drivers (XMS, EMS, DPMI) when you use the Phlash.

NOTE: Please use the AC adaptor power supply when you run the Phlash utility. If the battery pack does not contain enough power to finish BIOS flash, you may not boot the system because the BIOS is not completely loaded.


Follow the steps below to run the Phlash.

1. Prepare a bootable diskette.
2. Copy the flash utilities to the bootable diskette.
3. Then boot the system from the bootable diskette. The flash utility has auto-execution function.

DOS Flash Utility

Perform the following steps to use the DOS Flash Utility:

- 1. Press F2 during boot to enter the Setup Menu.
- 2. Select **Boot Menu** to modify the boot priority order, for example, if using USB HDD to Update BIOS, move USB HDD to position 1.

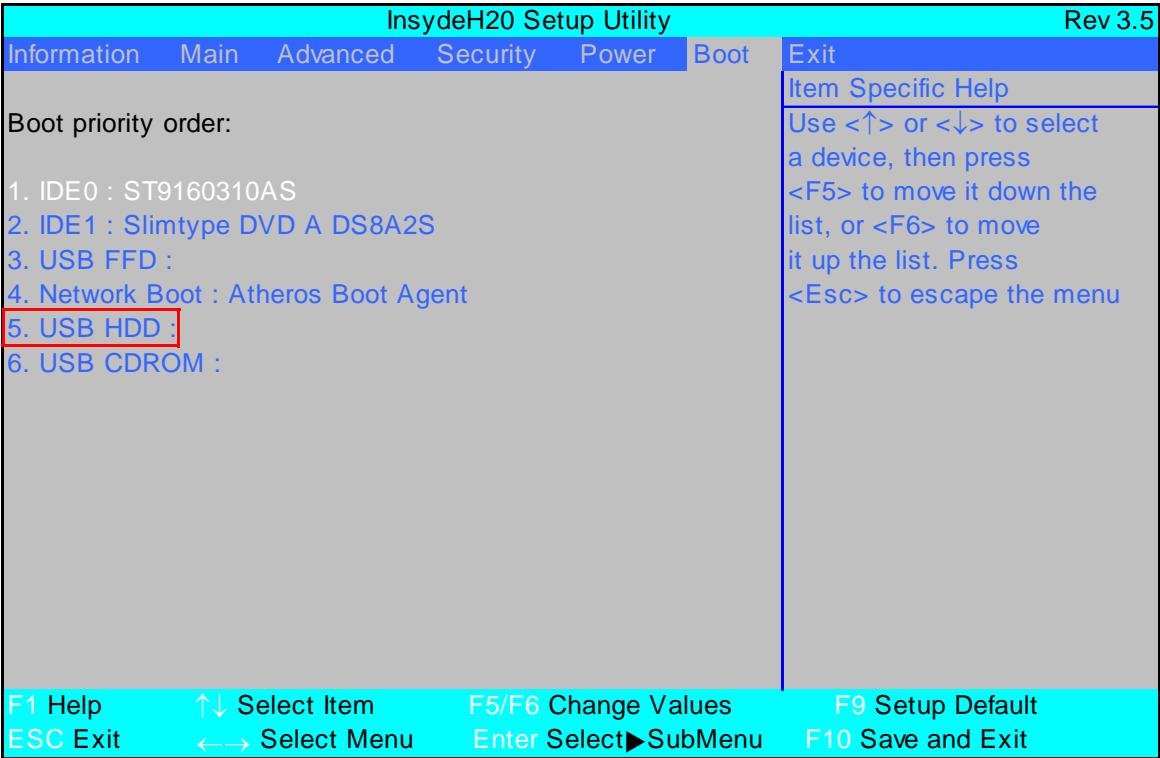

- 3. Execute the **IFLASH.BAT** batch file to update BIOS.

The flash process begins as shown.



4. In flash BIOS, the message **Please do not remove AC Power Source** displays.

NOTE: If the AC power is not connected, the following message displays.



Plug in the AC power to continue.

5. Flash is complete when the message Flash programming complete displays.

WinFlash Utility

Perform the following steps to use the WinFlash Utility:

1. Double click the WinFlash executable.
2. Click **OK** to begin the update. A progress screen displays.




3. When the process is complete, close all programs and applications and reboot the system.

Remove HDD/BIOS Password Utilities

This section provide you with removing HDD/BIOS method:


Remove HDD Password:

When the user keys in the wrong password three times, the system reports the following error code to user.

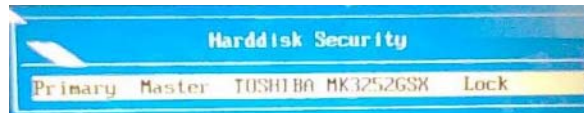

To unlock the HDD password, perform the following steps:

1. Press **Enter** to display the Select Item screen.

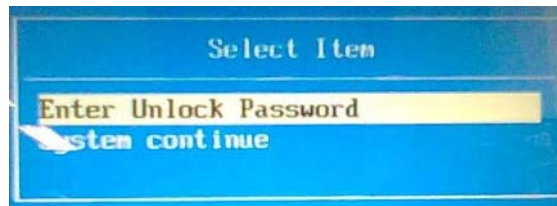

2. Select **Enter Unlock Password** and press **Enter**.

An Unlock Password displays.




3. Make a note of the key, **76943488** in the example.
4. Boot up the system and open a DOS prompt.
5. Enter the **UnlockHD.EXE** command and input the key to create an unlock code. Make a note of the result, for example **46548274**.
6. Reboot and enter the BIOS by pressing F2 when prompted.
7. Go to the Security menu and select Set Hdd Password (see "Security" on page 35).



8. Enter the unlock code generated by UnlockHD.EXE as the current password, **46548274** in the example, and complete the **New Password** and **Confirm** fields to create a new HDD password.
9. Save and exit the BIOS to complete the process.

Removing BIOS Passwords:

If you key in the wrong Supervisor Password three times, System Disabled displays on the screen. See the image below.

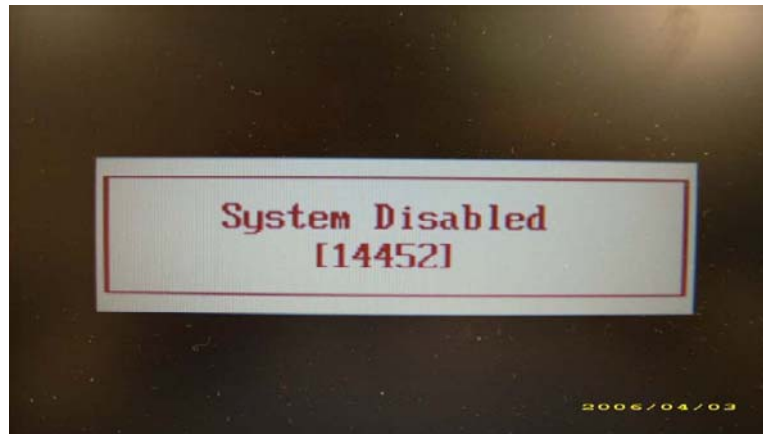

To reset the BIOS password, run BIOS_PW.EXE as follows:


1. Key in **bios_pw 14452 0**
2. Select one string from the list.



```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\M54>d:
D:\>bios_pw 14452 0 1.
unlock6.exe v1.0 1 July 1997
qj1g9v0q
07ygmjd
cjl14tm
6mbzjaj 2.
D:\>_
```


3. Reboot the system and key in the selected string (qjjg9vy, 07yqmd etc.) for the BIOS user password.

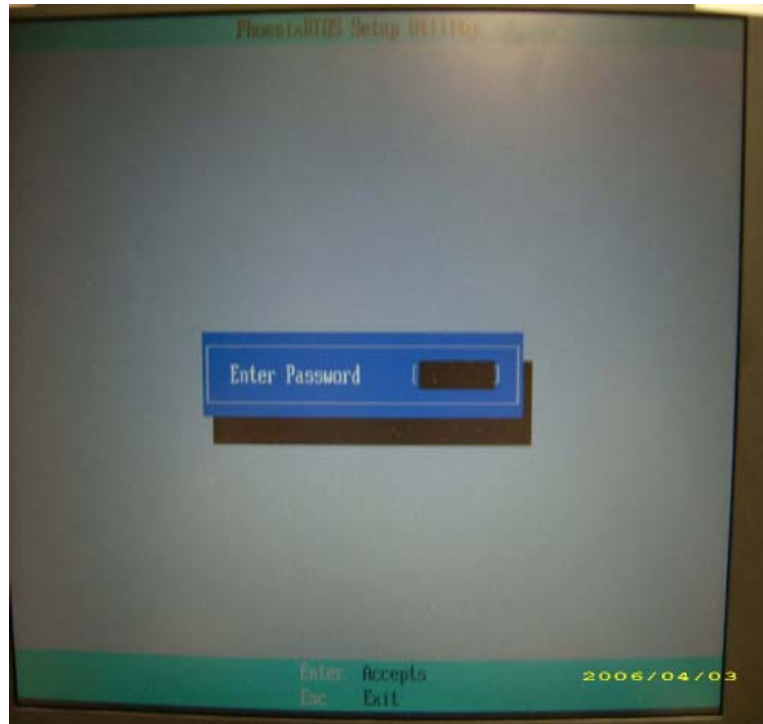

Cleaning BIOS Passwords

To clear the password, perform the following steps:

1. From a DOS prompt, Execute **clnpwd.exe**

```
d:\Clnpwd>clnpwd
ACER Clean Password Utility V1.00
Press 1 or 2 to clean any password shown as below
    1.User Password
    2.Supervisor Password

Clean User Password Successfully!
```

2. Press 1 or 2 to clean the desired password shown on the screen.

The onscreen message determines whether the function is successful or not.

Miscellaneous Utilities

Using Boot Sequence Selector

Boot Sequence Selector allows the boot order to be changes without accessing the BIOS. To use Boot Sequence Selector, perform the following steps:

1. Enter into DOS.
2. Execute **BS.exe** to display the usage screen.

```
d:\B00TSEQ>bs

*** Boot Sequence Selector Version 0.03 ***
Create by Rockwell Chuang 10/01/2005.

Usage:
      BS [ 1 | 2 | 3 | 4 ]

BS 1 : [ Floppy ] => [ HardDisk ] => [ CD-ROM ] => [ LAN ]
BS 2 : [ HardDisk ] => [ CD-ROM ] => [ LAN ] => [ Floppy ]
BS 3 : [ CD-ROM ] => [ HardDisk ] => [ LAN ] => [ Floppy ]
BS 4 : [ LAN ] => [ Floppy ] => [ HardDisk ] => [ CD-ROM ]

d:\B00TSEQ>
```

3. Select the desired boot sequence by entering the corresponding sequence, for example, enter **BS2** to change the boot sequence to HDD|CD ROM|LAN|Floppy.

Using DMITools

The DMI (Desktop Management Interface) Tool copies BIOS information to eeprom to be used in the DMI pool for hardware management.

When the BIOS displays **Verifying DMI pool data** it is checking the table correlates with the hardware before sending to the operating system (Windows, etc.).

To update the DMI Pool, perform the following steps:

1. Enter into DOS.
2. Execute **dmitools**. The following messages show dmitools usage:
 - dmitools /r ==> Read dmi string from memory
 - dmitools /wm xxxx ==> Write manufacturer name to EEPROM (max. 16 characters)
 - dmitools /wp xxxx ==> Write product name to EEPROM (max. 16 characters)
 - dmitools /ws xxxx ==> Write serial number to EEPROM (max. 22 characters)
 - dmitools /wu xxxx ==> Write uuid to EEPROM (Ignore String)
 - dmitools /wa xxxx ==> Write asset tag to EEPROM (max. 32 characters)

NOTE: The following write examples (2 to 5) require a system reboot to take effect

Example 1: Read DMI Information from Memory

Input:

```
dmitools /r
```

Output:

```
Manufacturer (Type1, Offset04h): Acer
Product Name (Type1, Offset05h): eMachines xxxxx
Serial Number (Type1, Offset07h): 01234567890123456789
UUID String (Type1, Offset08h): xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxxxx
Asset Tag (Type3, Offset04h): Acer Asstag
```

Example 2: Write Product Name to EEPROM

Input:

```
dmitools /wp Acer
```

Example 3: Write Serial Number to EEPROM

Input:

```
dmitools /ws 01234567890123456789
```

Example 4: Write UUID to EEPROM

Input:

```
dmitools /wu
```

Example 5: Write Asset Tag to EEPROM

Input:

```
dmitools /wa Acer Asstag
```


Machine Disassembly and Replacement

This chapter contains step-by-step procedures on how to disassemble the notebook computer for maintenance and troubleshooting.

Disassembly Requirements

To disassemble the computer, you need the following tools:

- Wrist grounding strap and conductive mat for preventing electrostatic discharge
- Flat screwdriver
- Philips screwdriver
- Plastic flat screwdriver
- Plastic tweezers

NOTE: The screws for the different components vary in size. During the disassembly process, group the screws with the corresponding components to avoid mismatch when putting back the components.

General Information

Pre-disassembly Instructions

Before proceeding with the disassembly procedure, make sure that you do the following:

1. Turn off the power to the system and all peripherals.
2. Unplug the AC adapter and all power and signal cables from the system.



3. Place the system on a flat, stable surface.
4. Remove the battery pack.

Disassembly Process

The disassembly process is divided into the following stages:

- External module disassembly
- Main unit disassembly
- LCD module disassembly

The flowcharts provided in the succeeding disassembly sections illustrate the entire disassembly sequence. Observe the order of the sequence to avoid damage to any of the hardware components. For example, if you want to remove the main board, you must first remove the keyboard, then disassemble the inside assembly frame in that order.


Main Screw List

| Description | Quantity | Acer P/N |
|----------------------------|----------|--------------|
| M2.0D 3.0L K4.6D 0.8T ZK | 17 | 86.AD302.001 |
| M2.5D 3.0L K5.5D 0.8T ZK | 15 | 86.AD302.002 |
| M2.5D 5L K 5.5D ZK NL | 21 | 86.AD302.003 |
| M2.5D 10.0L K 5.5D 0.8T ZK | 12 | 86.AD302.004 |
| M3.0D 3.0L K 4.9D NI+ | 4 | 86.AD302.005 |
| M2.5D 3.2L K 6D NI+ | 4 | 86.AD302.006 |

External Module Disassembly Process

External Modules Disassembly Flowchart

The flowchart below gives you a graphic representation on the entire disassembly sequence and instructs you on the components that need to be removed during servicing. For example, if you want to remove the main board, you must first remove the keyboard, then disassemble the inside assembly frame in that order.

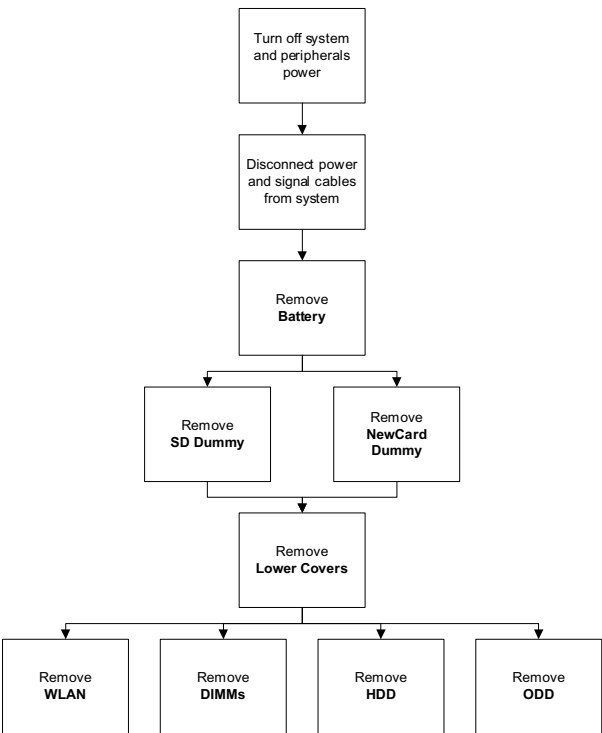

Screw List


| Step | Screw | Quantity | Part No. |
|-------------|--------|----------|--------------|
| WLAN Module | M2*3 | 2 | 86.AD302.001 |
| HDD Carrier | M3*3 | 4 | 86.AD302.005 |
| ODD Module | M2.5*5 | 1 | 86.AD302.003 |
| ODD Bracket | M2*3 | 2 | 86.AD302.001 |

Removing the Battery Pack

1. Turn computer over.
2. Slide the battery lock/unlock latch to the unlock position.



3. Slide and hold the battery release latch to the release position (1), then lift out the battery pack from the main unit (2).

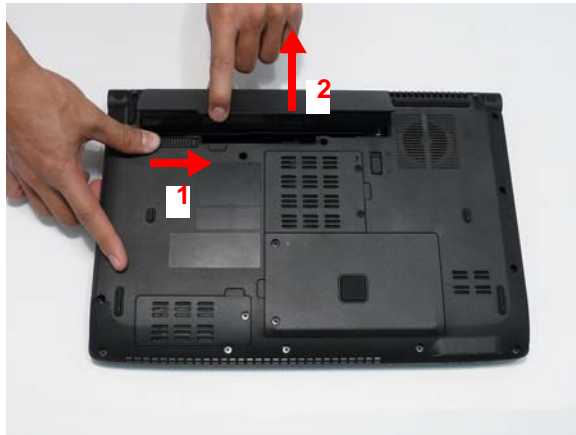

Removing the SD dummy card

1. Push the SD dummy card all the way in to eject it.



2. Pull it out from the slot.



Removing the ExpressCard dummy card

1. Push the ExpressCard all the way in to eject the ExpressCard dummy.




2. Pull it out from the slot.




Removing the Lower Covers

1. See “Removing the Battery Pack” on page 54.
2. See “Removing the SD dummy card” on page 55.
3. See “Removing the ExpressCard dummy card” on page 56.
4. Loosen the five captive screws in the covers as shown.

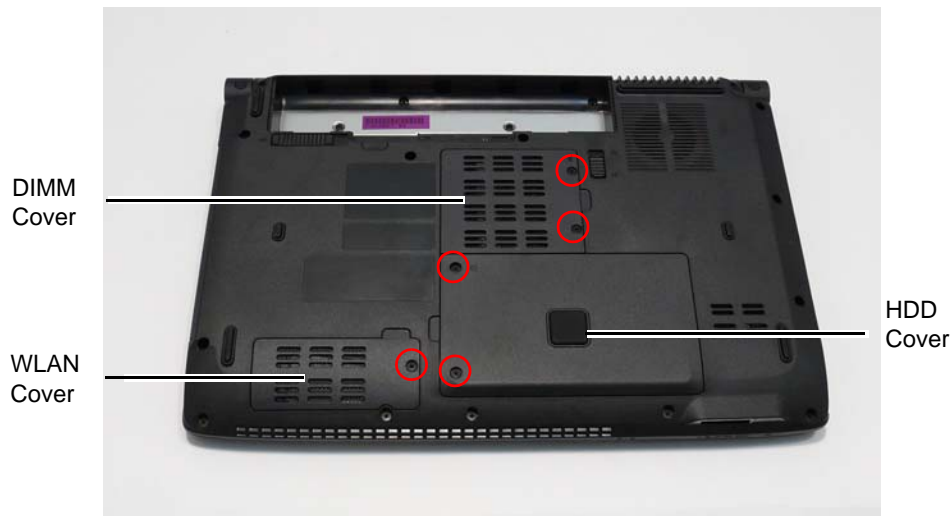

5. Carefully open the DIMM Cover.

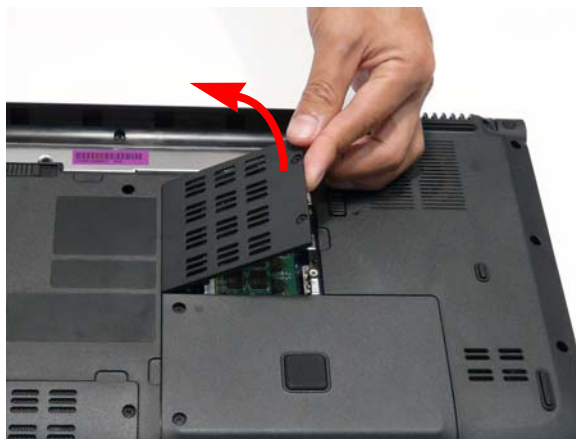

6. Remove the WLAN Cover as shown.



7. Carefully open the HDD Cover.




Removing the WLAN Module

- 1. See “Removing the Lower Covers” on page 57.
- 2. Disconnect the two antenna cables.



- 3. Remove the two securing screws.




| Step | Size | Quantity | Screw Type |
|-------------|------|----------|---|
| WLAN Module | M2*3 | 2 |  |

- 4. Remove the WLAN module as shown.




Removing the DIMM Modules

1. See “Removing the Lower Covers” on page 57.
2. Push out the release latches on both sides of the DIMM socket to release the DIMM module.

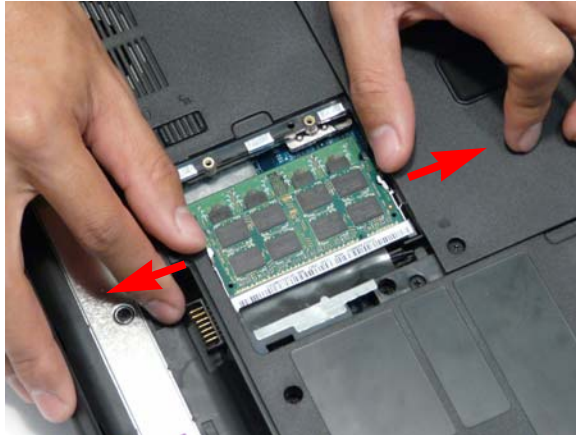

3. Remove the DIMM module.

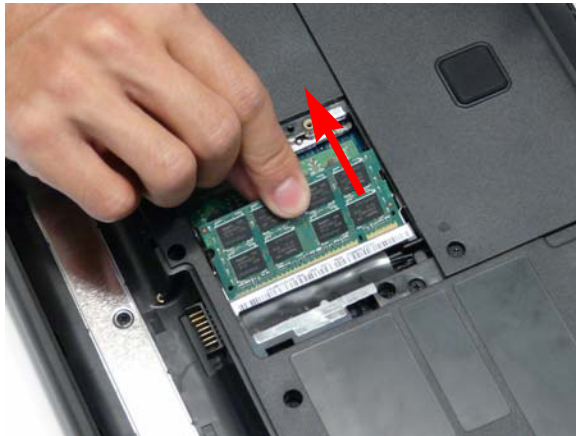

4. Repeat steps for the second DIMM module.

Removing the Hard Disk Drive Module

1. See “Removing the Lower Covers” on page 57.
2. Hold the Pull Tab and slide the HDD away from the connector.





3. Pull the HDD up as shown to remove.




NOTE: To prevent damage to HDD, avoid pressing down on it or placing heavy objects on top of it.

4. Remove the four screws (two each side) securing the HDD to the carrier.

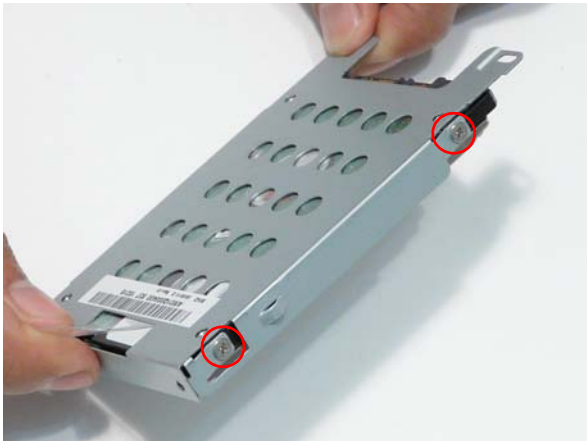

| Step | Size | Quantity | Screw Type |
|-------------|------|----------|---|
| HDD Carrier | M3*3 | 4 |  |


5. Lift the HDD carrier to remove.

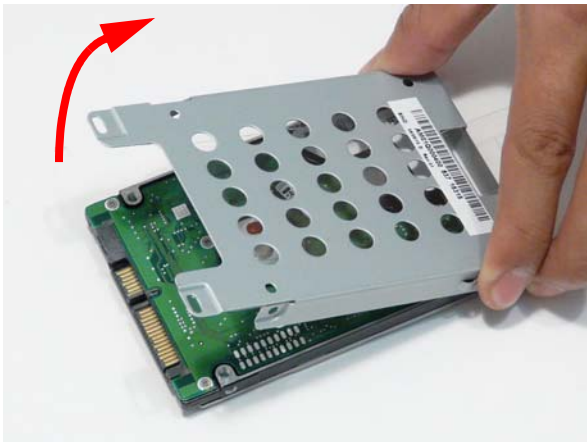


Removing the Optical Disk Drive Module

- 1. See “Removing the Lower Covers” on page 57.
- 2. Remove the screw securing the ODD module.




| Step | Size | Quantity | Screw Type |
|------------|--------|----------|---|
| ODD Module | M2.5*5 | 1 |  |

- 3. Insert a screw driver as shown and push the ODD Module out of the bay.

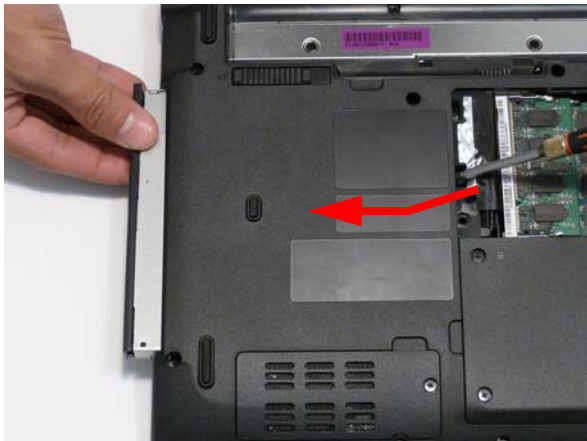


4. Remove the two screws securing the ODD bracket and remove the ODD bracket from the optical disk drive module.




| Step | Size | Quantity | Screw Type |
|-------------|------|----------|---|
| ODD Bracket | M2*3 | 2 |  |

5. Insert a pin in the eject hole of the ODD to eject the ODD tray.

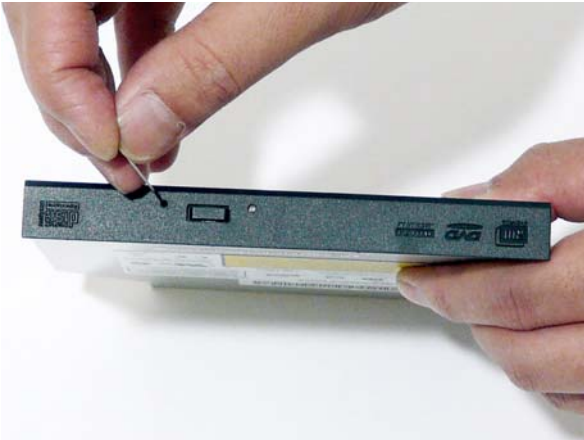


6. Press down on the locking catch to release the ODD cover and remove.

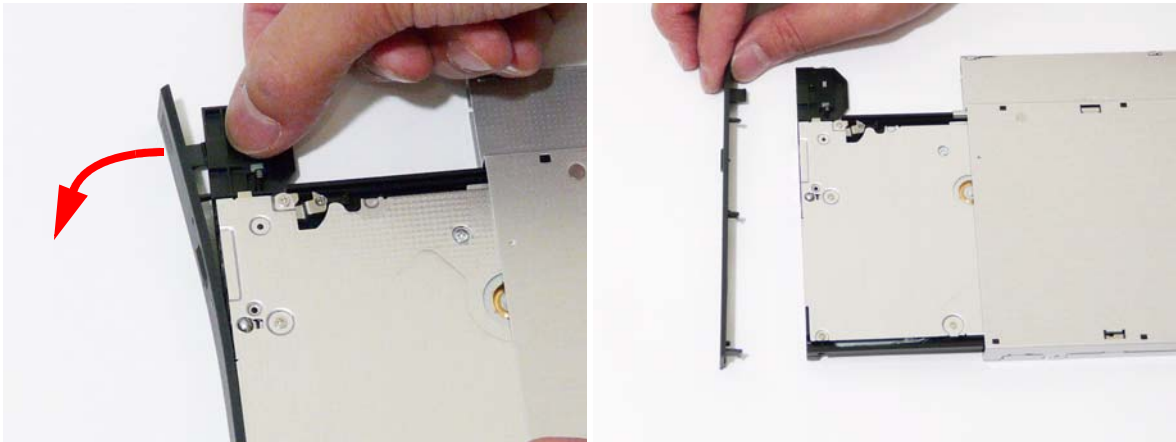

Main Unit Disassembly Process

Main Unit Disassembly Flowchart

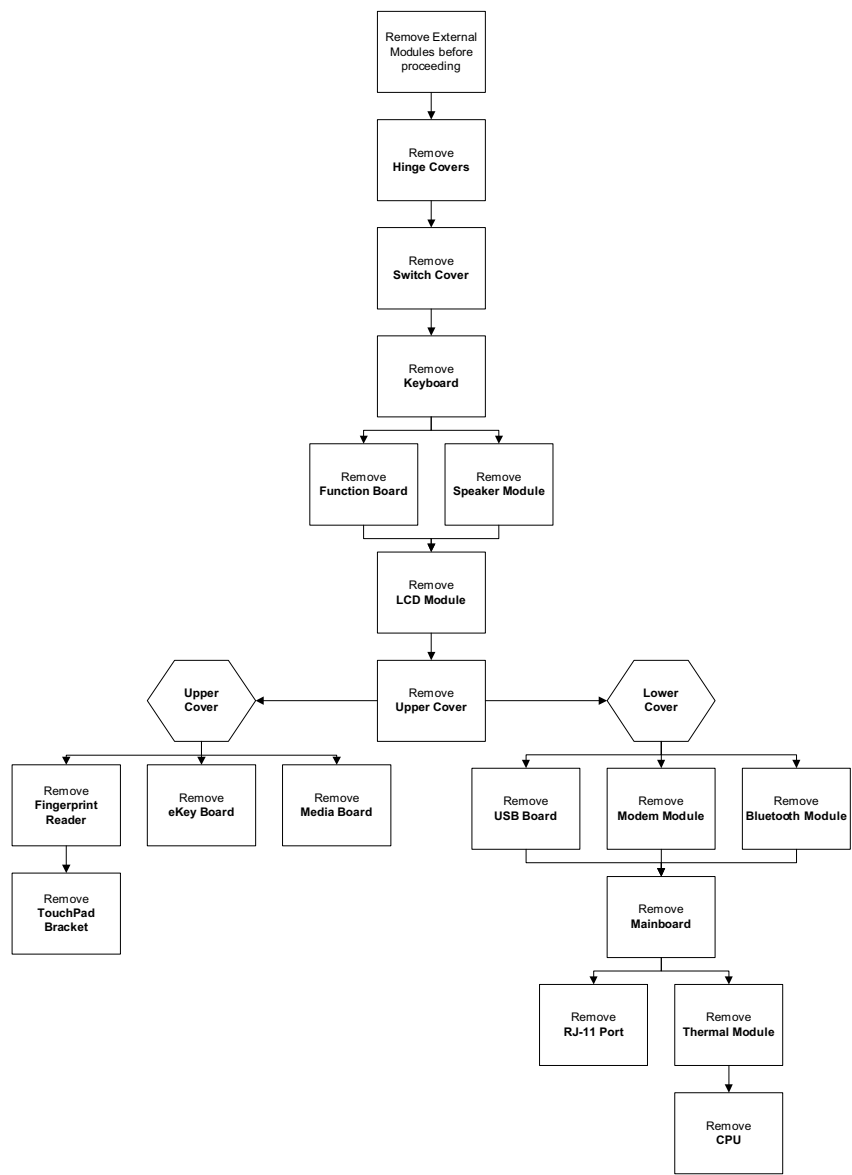

Screw List


| Step | Screw | Quantity | Part No. |
|----------------|---------|----------|--------------|
| Hinge Covers | M2*3 | 2 | 86.AD302.001 |
| Switch Cover | M2.5*3 | 4 | 86.AD302.002 |
| | M2.5*10 | 2 | 86.AD302.004 |
| Function Board | M2.5*3 | 2 | 86.AD302.002 |
| Speaker Module | M2.5*3 | 2 | 86.AD302.002 |
| LCD Module | M2.5*5 | 6 | 86.AD302.003 |

| Step | Screw | Quantity | Part No. |
|---------------------|------------|----------|--------------|
| Upper Cover | M2.5*10 | 10 | 86.AD302.004 |
| | M2.5*5 | 6 | 86.AD302.003 |
| | M2.5*3 | 1 | 86.AD302.002 |
| Finger Print Reader | M2*3 | 1 | 86.AD302.001 |
| TouchPad Bracket | M2*3 | 2 | 86.AD302.001 |
| eKey Board | M2.5*3 | 1 | 86.AD302.002 |
| USB Board | M2.5*3 | 1 | 86.AD302.002 |
| Modem Module | M2*3 | 2 | 86.AD302.001 |
| BT Module | M2.5*3 | 1 | 86.AD302.002 |
| Mainboard | M2.5*3 | 1 | 86.AD302.002 |
| Thermal Module | M2.5*5*3.2 | 4 | 86.AD302.006 |

Removing the Hinge Covers

1. See “Removing the Battery Pack” on page 54.
2. Remove the two screw caps and screws from the Hinge Covers.



| Step | Size | Quantity | Screw Type |
|--------------|------|----------|---|
| Hinge Covers | M2*3 | 2 |  |

3. Slide the covers off the hinges in the direction of the arrows.


IMPORTANT: The left and right Hinge Covers are shaped differently and marked **L** and **R** on the inside. Ensure that the correct cover is used during reassembly.



Removing the Switch Cover

CAUTION: Using tools to remove the Switch Cover may cause damage to the outer casing. It is recommended that only fingers are used to remove the Switch Cover.

- 1. See “Removing the Battery Pack” on page 54.
- 2. See “Removing the Hinge Covers” on page 67.
- 3. Locate and remove the ten securing screws on the bottom of the computer.

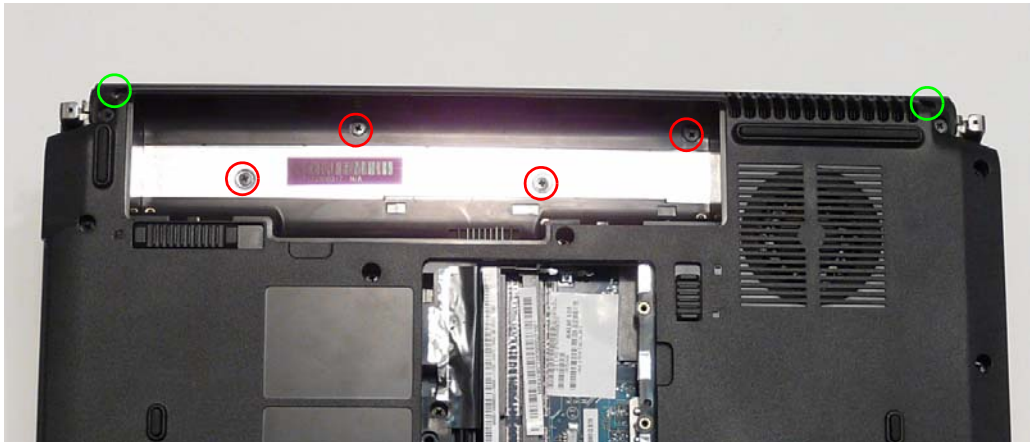

| Step | Size | Quantity | Screw Type |
|------------------------------|---------|----------|------------|
| Switch Cover (red callout) | M2.5*3 | 4 | |
| Switch Cover (green callout) | M2.5*10 | 2 | |

- 4. Turn the computer over and open the LCD module to expose the Switch Cover.
- IMPORTANT:**The LCD module does not fully extend. Damage will occur if you attempt to extend the LCD module beyond the manufacturer’s design.
- 5. Push the Switch Cover downward (1) and lift the leftside of the cover upward (2) to release the securing pins.



-
6. Using both hands, lift both sides of the rear edge of the Switch Cover upward as shown.



7. Lift the left side of the Switch Cover first and gently rotate it while lifting the right side clear of the casing.



8. Lift the Switch Cover clear of the chassis.

Removing the Keyboard


1. See “Removing the Switch Cover” on page 68.
2. Lift the keyboard from both sides to clear the securing tabs on both sides of the Keyboard.



3. Push the Keyboard toward the LCD screen to expose the Keyboard FFC cable.




4. Unlock the connector and pull the FFC to remove it from the Mainboard.

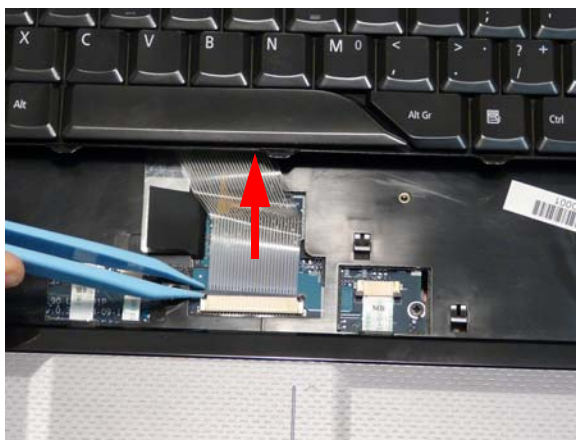


5. Remove the keyboard from the chassis.


Removing the Function Board

1. See "Removing the Switch Cover" on page 68.
2. Remove the two securing screws from the Function Board.

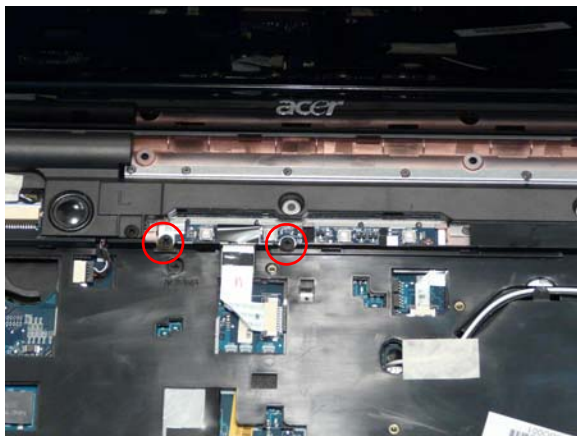


| Step | Size | Quantity | Screw Type |
|----------------|--------|----------|---|
| Function Board | M2.5*3 | 2 |  |

3. Unlock the connector and remove the FFC cable.

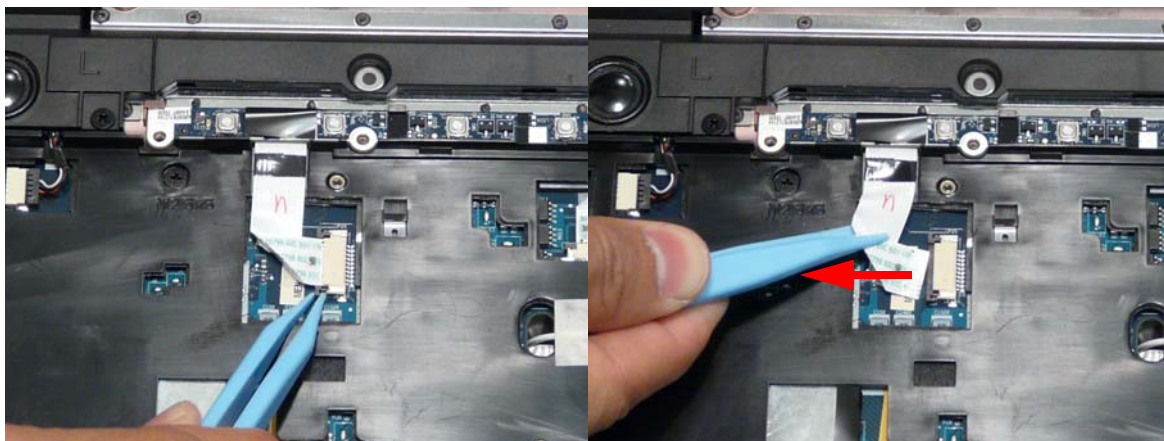



4. Rotate the board upward as shown and remove it from the chassis.

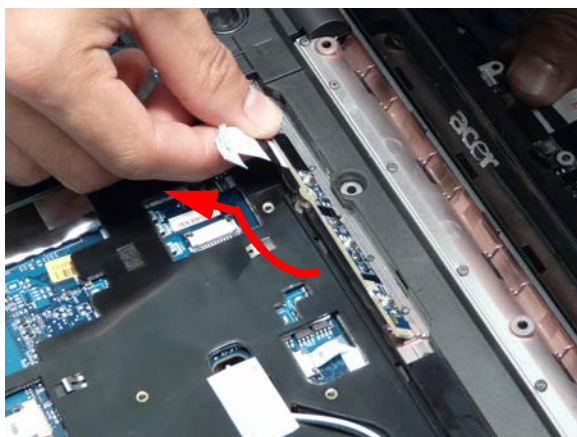


Removing the Speaker Module

- 1. See “Removing the Keyboard” on page 70.
- 2. Remove the two securing screws from the Speaker Module.

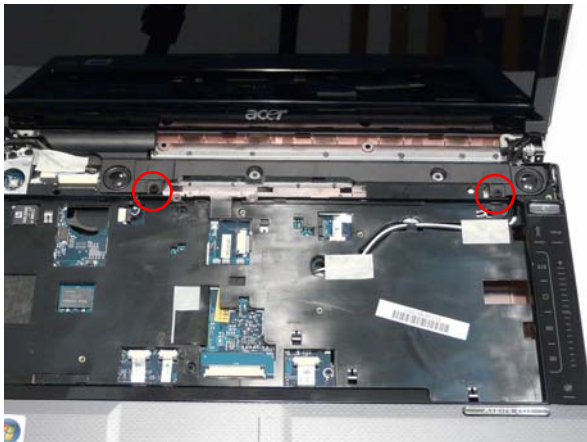


| Step | Size | Quantity | Screw Type |
|----------------|--------|----------|---|
| Speaker Module | M2.5*3 | 2 |  |


- 3. Remove the adhesive tape securing the LCD cables to the Speaker Module.

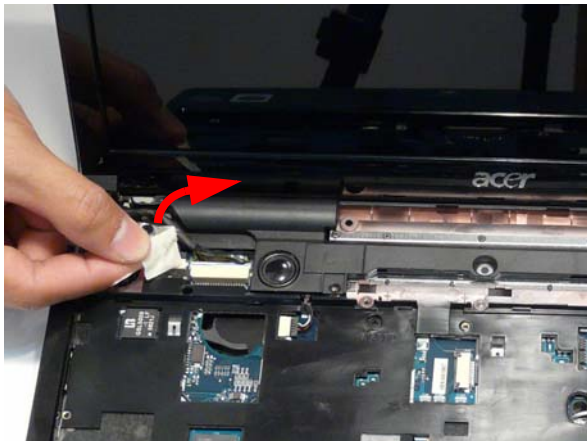

- 4. Disconnect the speaker cable as shown.

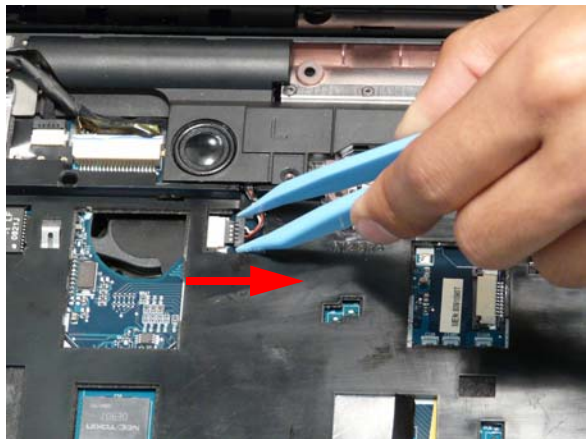


-
5. Rotate the Speaker Module upward, rear edge first to clear the LCD cables, and remove it from the chassis.

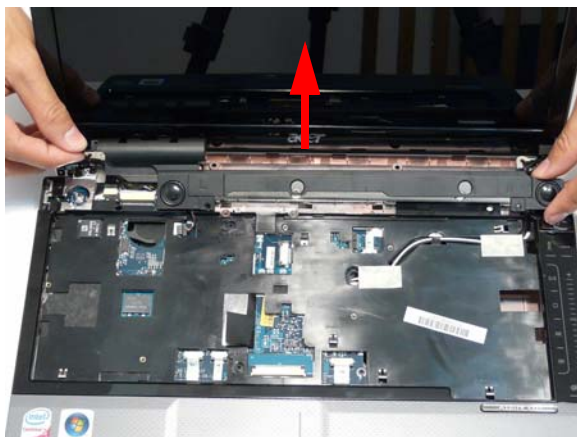


Removing the LCD Module

- 1. See “Removing the WLAN Module” on page 59.
- 2. See “Removing the Keyboard” on page 70.
- 3. Turn the computer over. Remove the two securing screws as shown.




| Step | Size | Quantity | Screw Type |
|------------|--------|----------|---|
| LCD Module | M2.5*5 | 2 |  |


- 4. Lift the securing tape to expose the Antenna cable as shown.

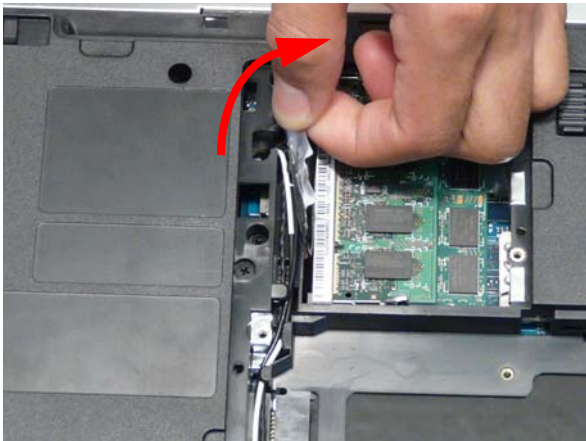


- 5. Push the Antenna cables through the casing as shown.

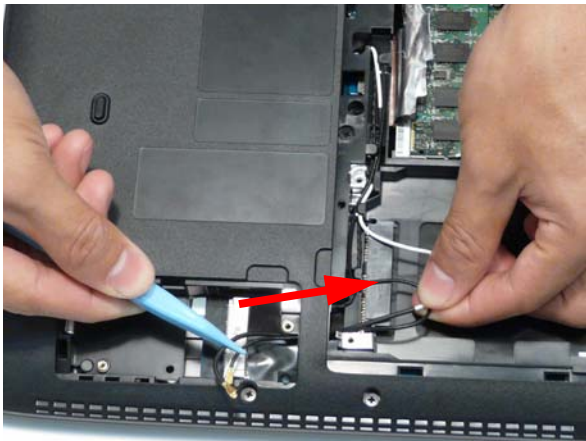

6. Completely remove the Antenna cable from the cable channel.

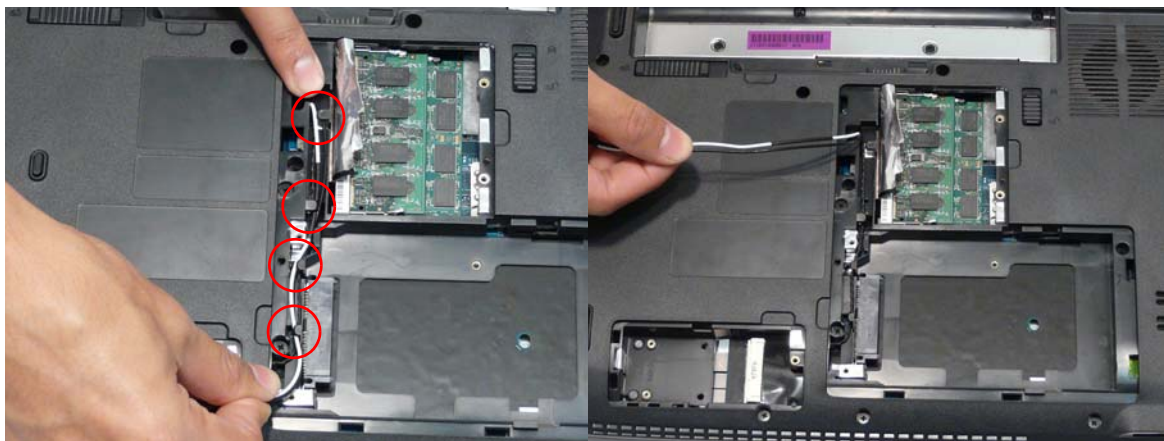


7. Turn the computer over. Remove the two adhesive strips from the Antenna cable.

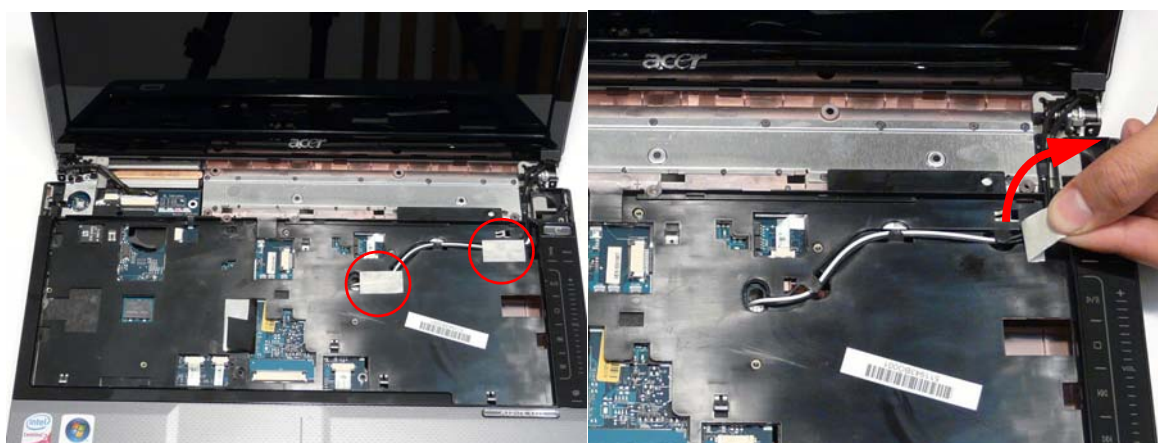




8. Rest the computer on the LCD Module and push the Antenna cable through the chassis as shown.




9. Completely remove the Antenna from the cable channel.

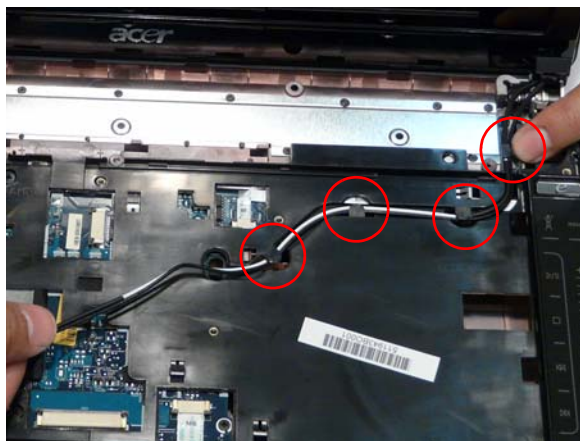


10. Disconnect the LCD cables from the Mainboard as shown.

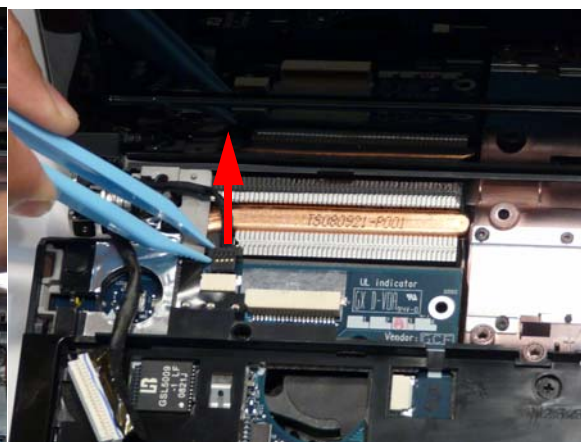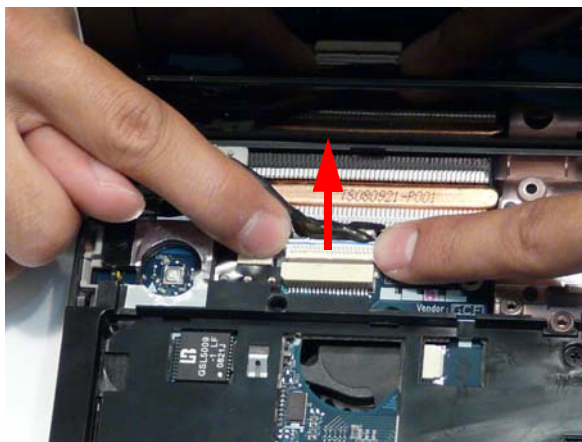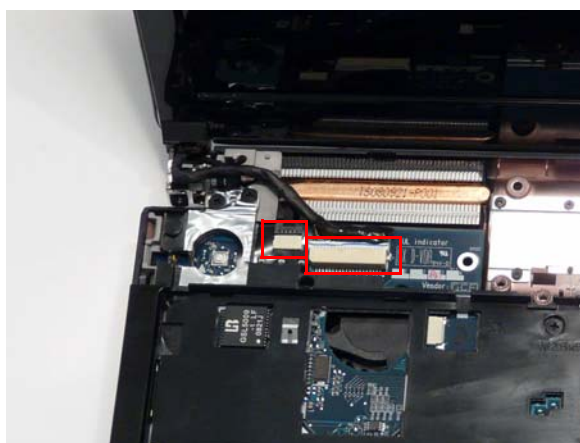


11. Remove the two securing screws from the left LCD hinge.

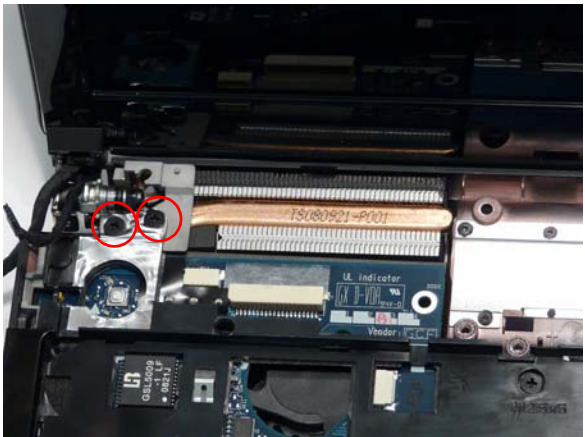



| Step | Size | Quantity | Screw Type |
|------------|--------|----------|---|
| LCD Module | M2.5*5 | 2 |  |

12. Peel back the adhesive strip from the LCD Hinge as shown.

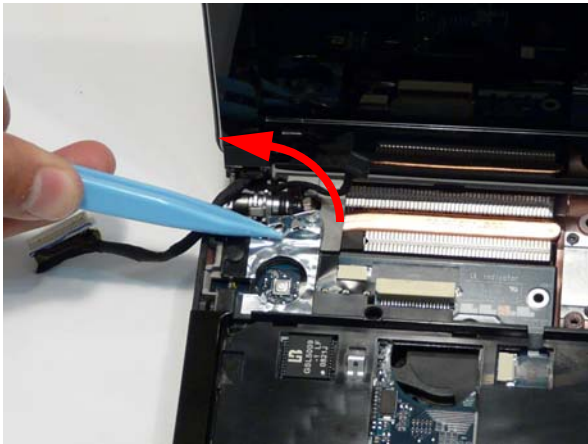


13. Remove the two securing screws from the right LCD hinge.

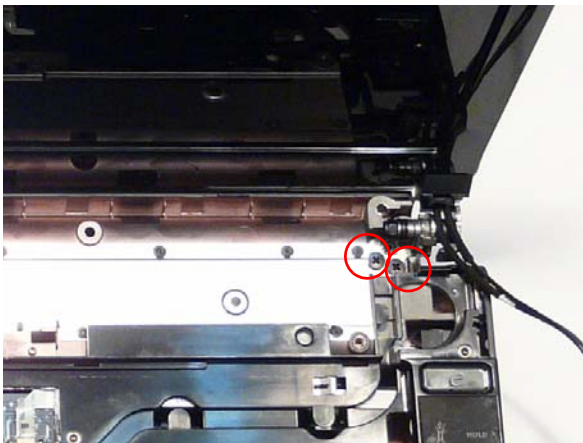


| Step | Size | Quantity | Screw Type |
|------------|--------|----------|---|
| LCD Module | M2.5*5 | 2 |  |

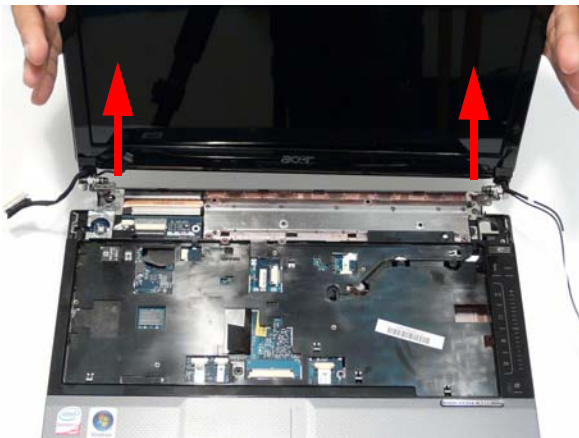

14. Carefully remove the LCD Module from the chassis.



Removing the Upper Base

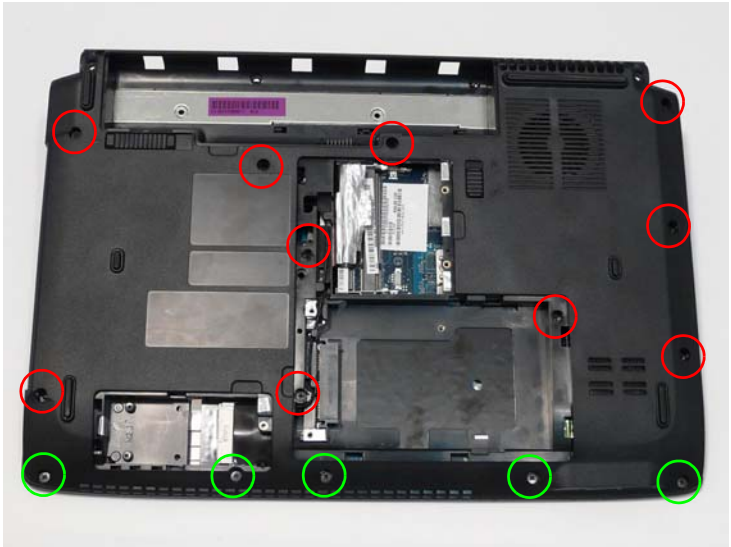

- 1. See “Removing the LCD Module” on page 74.
- 2. Turn the computer over. Remove the ten screws on the bottom panel.




| Step | Size | Quantity | Screw Type |
|-----------------------------|---------|----------|--|
| Upper Cover (red call out) | M2.5*10 | 10 |  |
| Upper Cover (green callout) | M2.5*5 | 5 |  |

- 3. Turn the computer over. Remove the two securing screws on the top panel.





| Step | Size | Quantity | Screw Type |
|-----------------------------|--------|----------|---|
| Upper Cover (red callout) | M2.5*5 | 1 |  |
| Upper Cover (green callout) | M2.5*3 | 1 |  |

4. Turn the computer over and disconnect the four FFC cables from the mainboard.

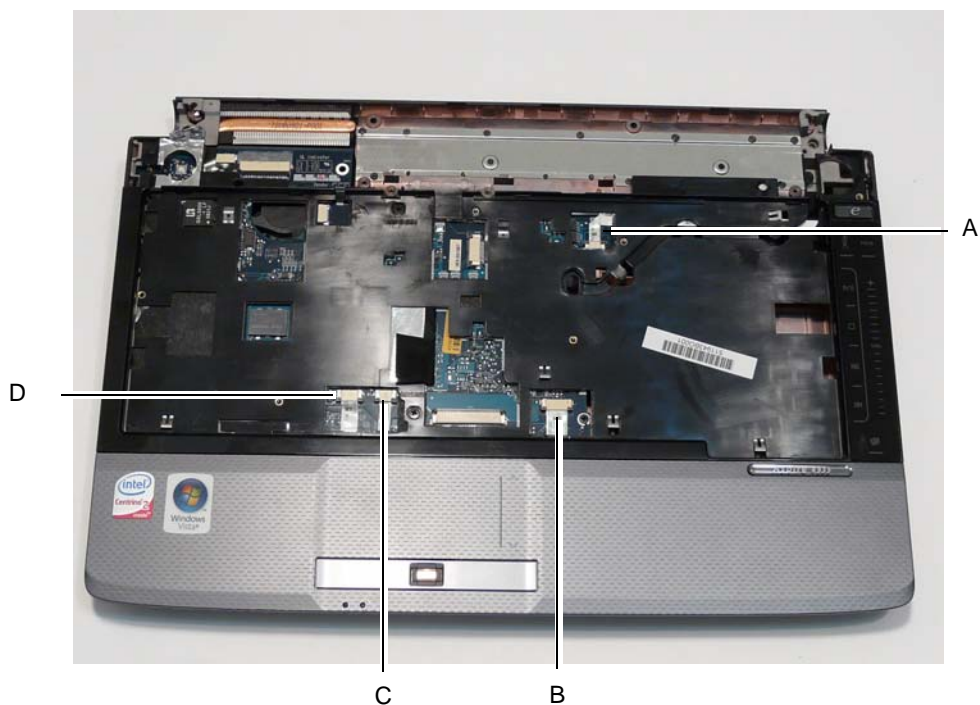



Unlock the connector and disconnect A as shown.

Unlock the connector and disconnect B as shown.

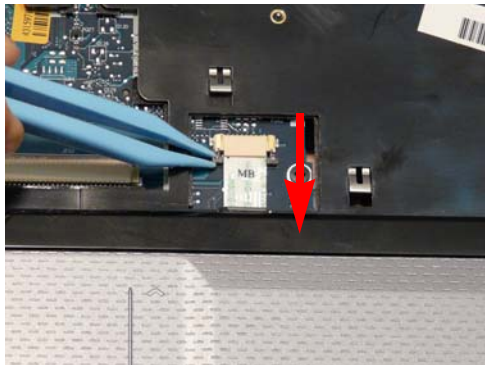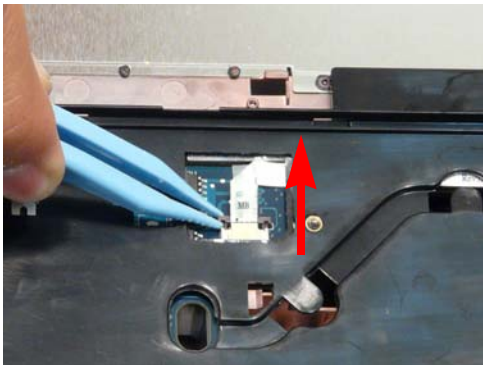

Unlock the connector and disconnect C as shown.

Unlock the connector and disconnect D as shown.

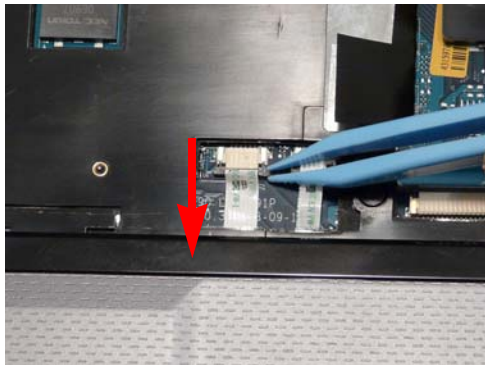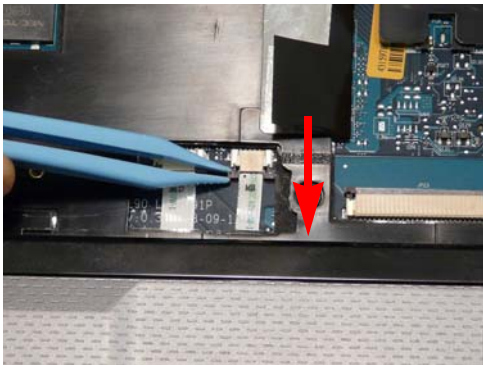

WARNING: Care must be taken when removing the Upper Base from the Lower Base to prevent damage or stress to the surface.


5. Ease the lower casing outward to clear the securing clips and pry apart the left side as shown, and lift the rear edge of the Upper Base upward.



6. Ease the lower casing outward to clear the securing clips and pry apart the right side as shown. Lift the rear edge of the Upper Base upward.




7. Completely remove the Upper Base from the Lower Base.

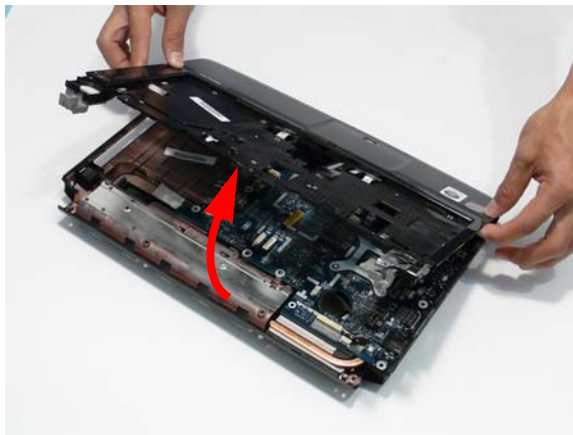


Removing the Finger Print Reader


NOTE: Only the Discrete SKU supports Finger Print Reader technology.

- 1. See “Removing the Upper Base” on page 79.
- 2. Remove the single securing screw on the bracket.

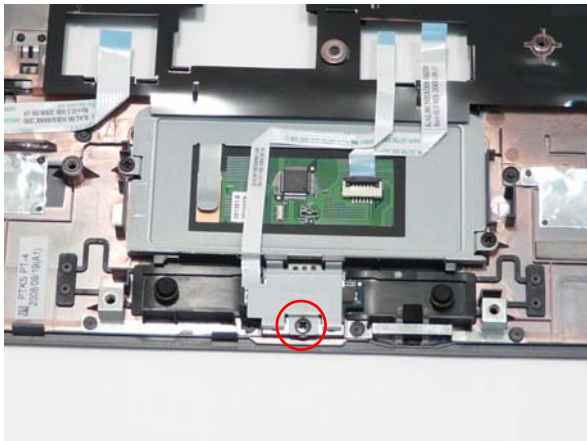


| Step | Size | Quantity | Screw Type |
|---------------------|------|----------|---|
| Finger Print Reader | M2*3 | 1 |  |

- 3. Lift the bracket clear of the casing.

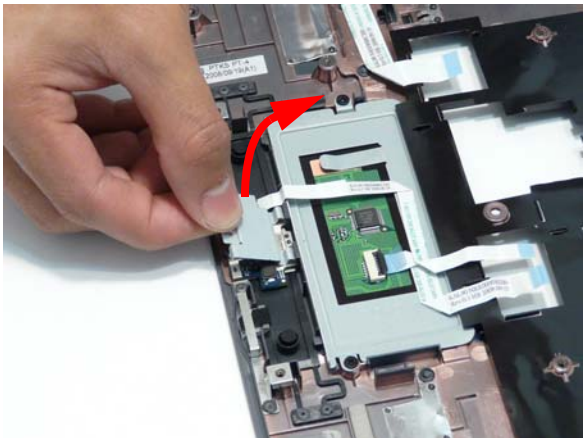


-
4. Lift the FFC, as shown, to disengage the adhesive and remove the Finger Print Reader Board from the casing.

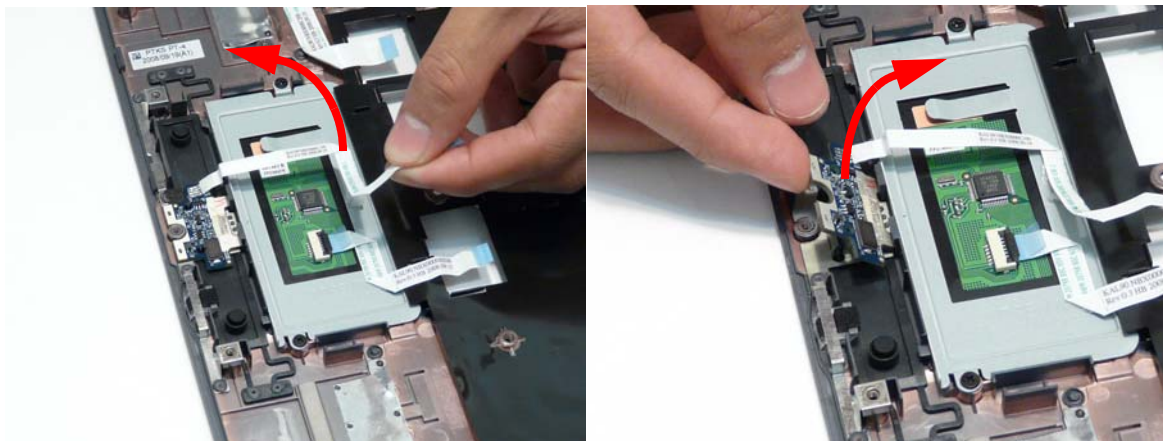


Removing the TouchPad Bracket


- 1. See “Removing the Upper Base” on page 79.
- 2. Lift the FFC, as shown, to disengage the adhesive.

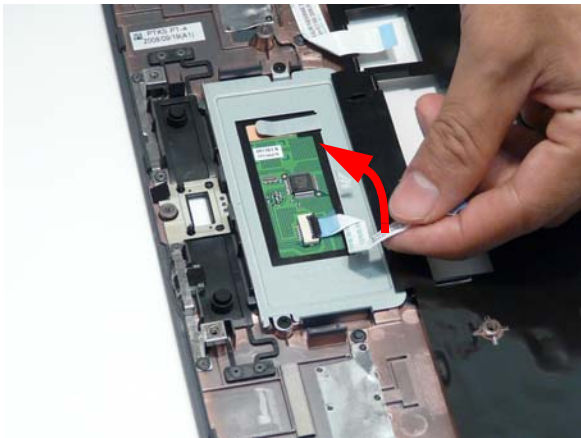


- 3. Open the FFC locking latch as shown and remove the FFC.

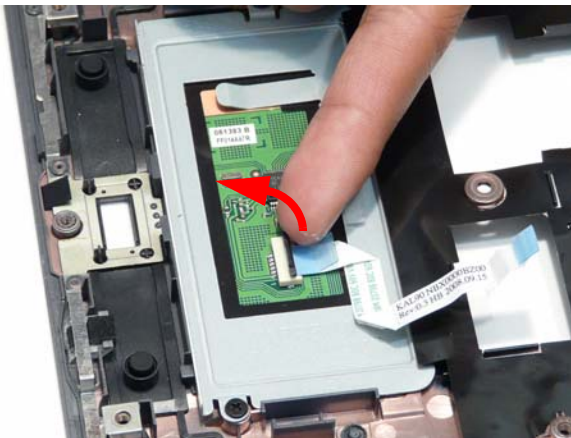


- 4. Remove the two screws from the TouchPad Bracket and remove it from the casing.

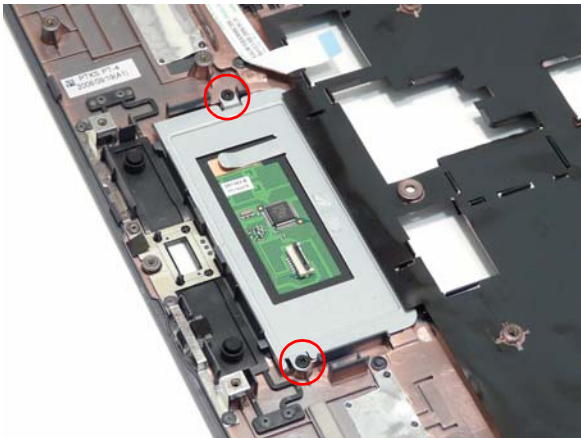


| Step | Size | Quantity | Screw Type |
|------------------|------|----------|---|
| TouchPad Bracket | M2*3 | 2 |  |


5. Remove the TouchPad Bracket from the Upper Base.

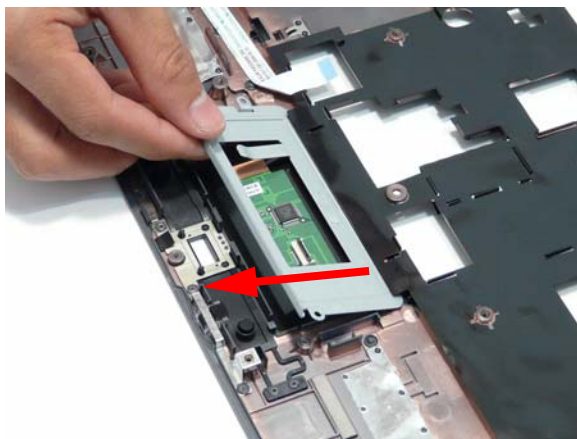


Removing the eKey Board

- 1. See “Removing the Upper Base” on page 79.
- 2. Remove the single securing screw from the board.

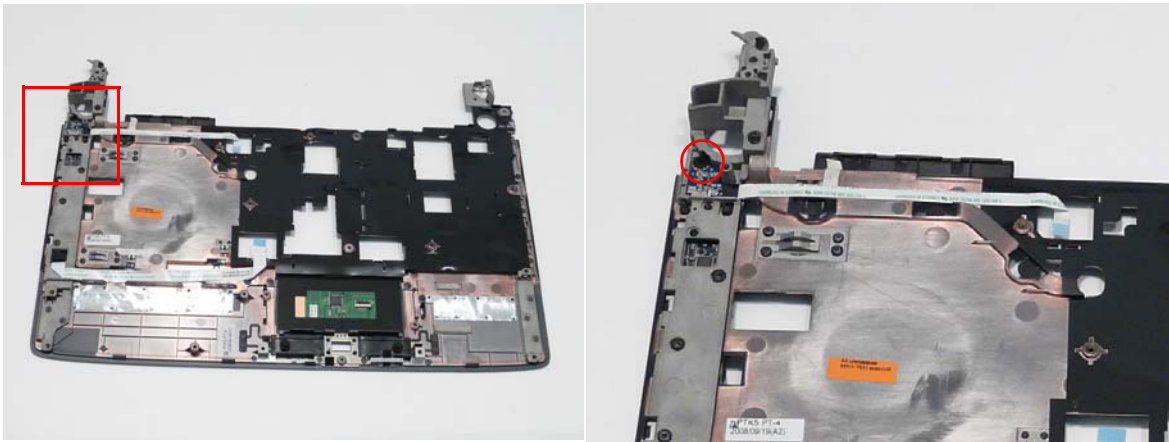


| Step | Size | Quantity | Screw Type |
|------------|--------|----------|---|
| ekey Board | M2.5*3 | 1 |  |

- 3. Lift the FFC to detach the adhesive strip.

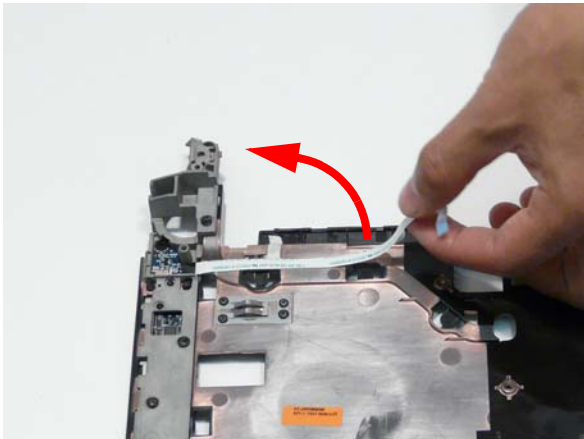

- 4. Remove the eKey Board from the Upper Base.

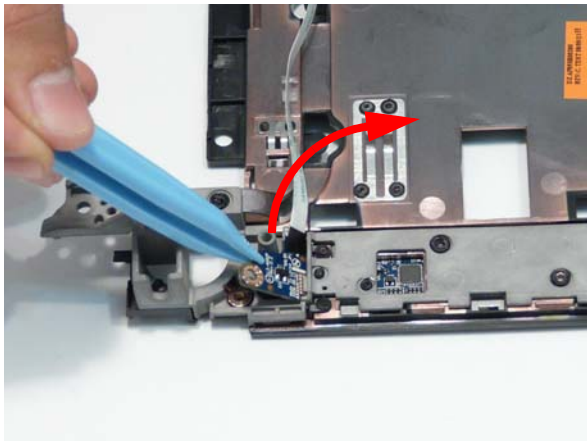

Removing the Media Board

WARNING: Care must be taken when removing the Media Board Cover from the Upper Base to prevent damage or stress to the surface.

1. See "Removing the Upper Base" on page 79.
2. Lift up the FFC to detach the adhesive.




3. Turn the Upper Base over. Pry the bottom edge of the Media Board Cover up and remove it from the Upper Base.

NOTE: The use of a plastic pry may aid cover removal.




4. Gently remove the Backlight Panel from the Media Board Cover as shown.

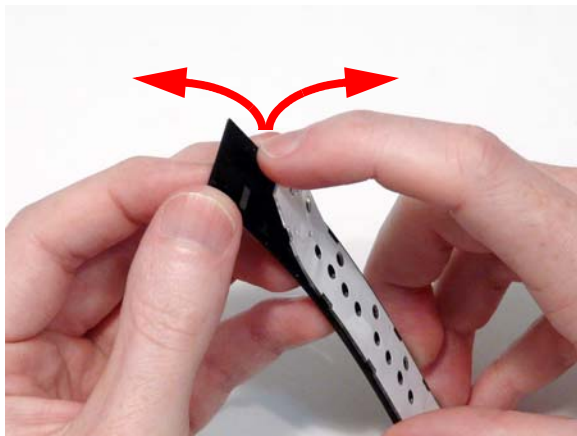

-
5. Using a plastic tool, press down the pin securing the Media Board in place and slide the Media Board in the direction of the arrow to release the locking pins.





6. Lift the Media Board from the Upper Base and feed the FFC through the casing to remove the Media Board.

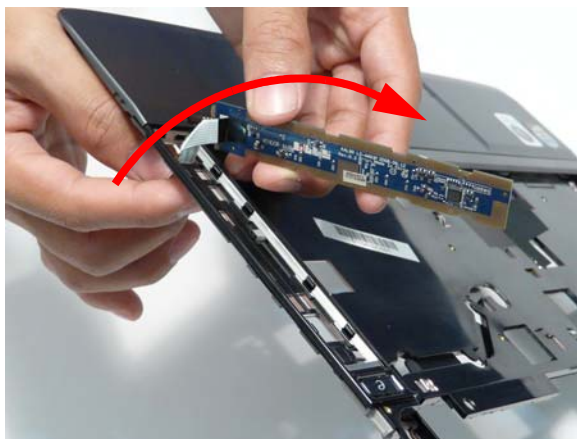


Removing the USB Board

- 1. See “Removing the Upper Base” on page 79.
- 2. Remove the single securing screw from the USB board.

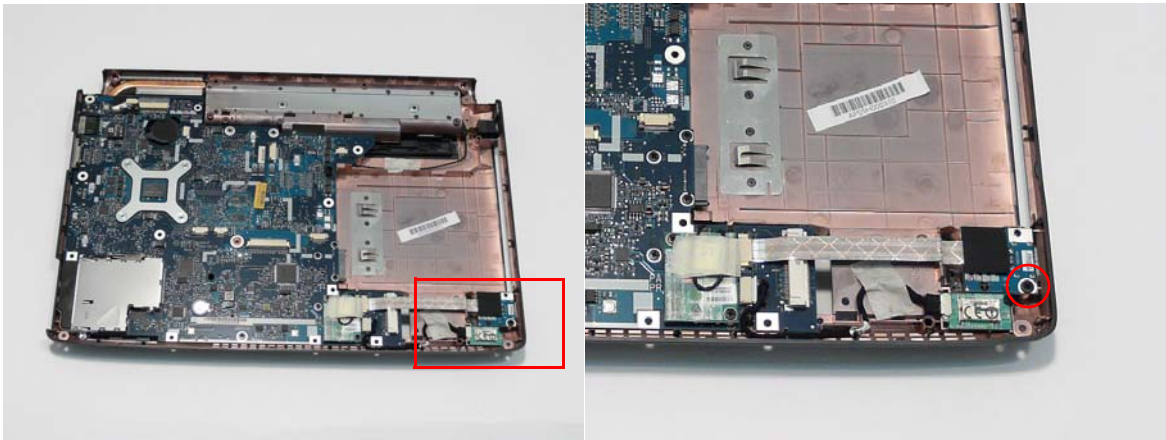

| Step | Size | Quantity | Screw Type |
|-----------|--------|----------|---|
| USB Board | M2.5*3 | 1 |  |


- 3. Open the FFC locking latch and remove the FFC from the Mainboard.

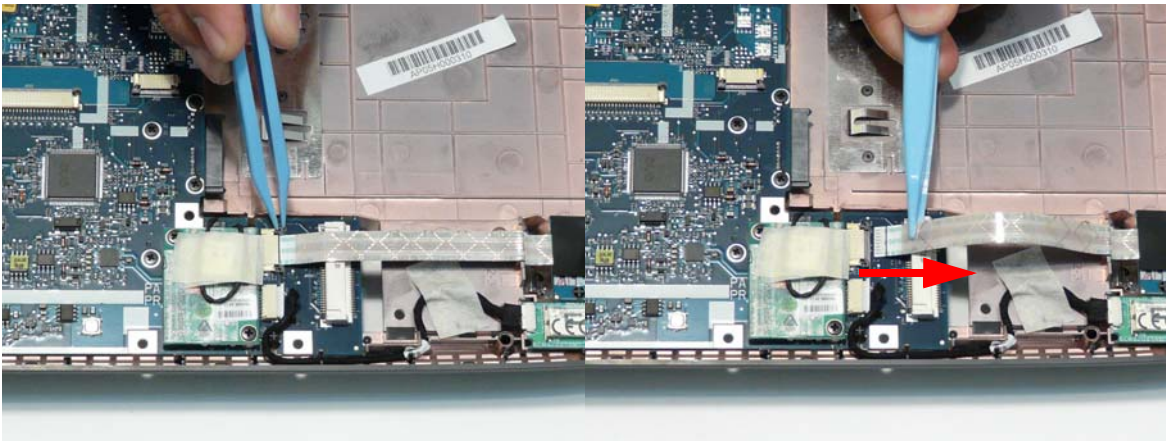

- 4. Lift the FFC to detach the adhesive from the casing.





-
5. Lift the USB Board clear of the casing.

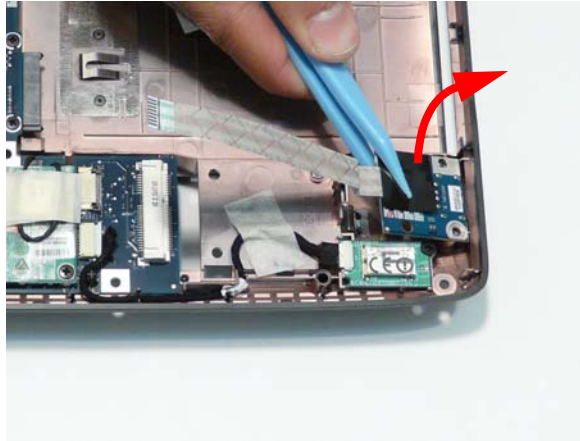


Removing the Modem Module

- 1. Remove the Upper Base. See “Removing the Upper Base” on page 79.
- 2. Remove the adhesive tape securing the cable to the Modem and remove the two securing screws.

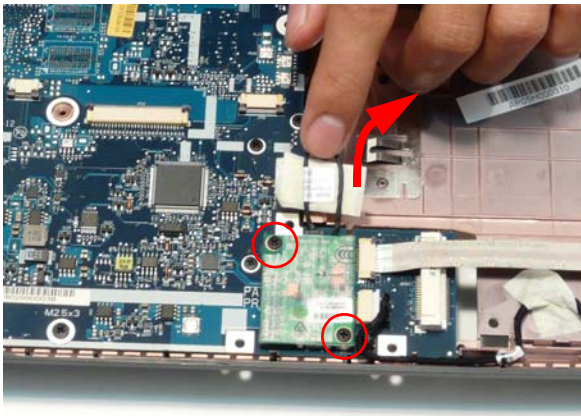


| Step | Size | Quantity | Screw Type |
|--------------|------|----------|---|
| Modem Module | M2*3 | 2 |  |

- 3. Lift the Modem Module clear of the Mainboard as shown.

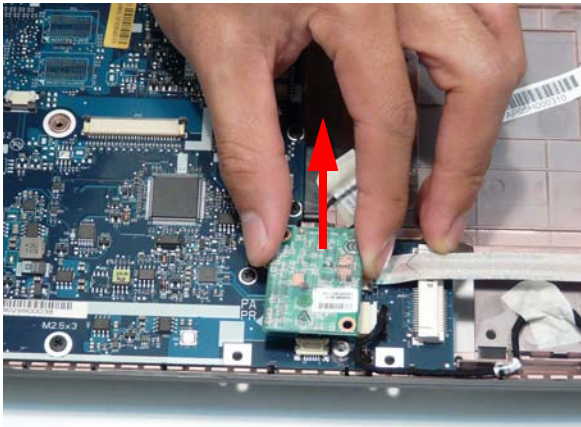


- 4. Turn the module over and disconnect the Modem cable. Remove the module from the casing.

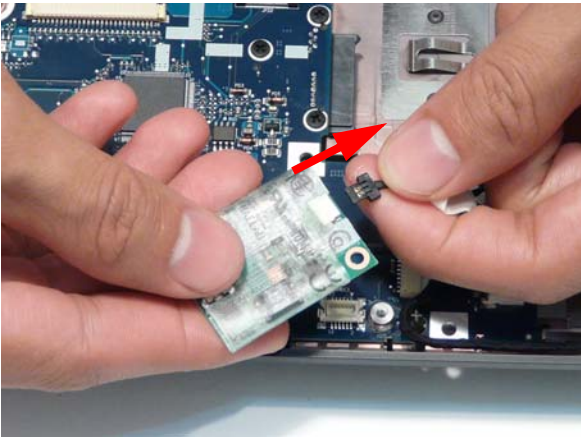


Removing the Bluetooth Module


- 1. See “Removing the Upper Base” on page 79.
- 2. Grasp the cable as shown and pull to disconnect from the Bluetooth module.

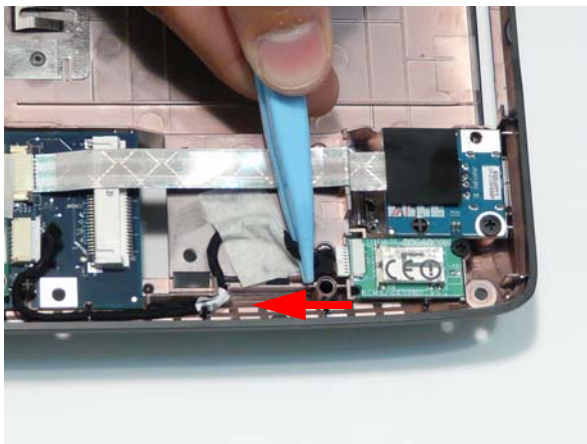


- 3. Disconnect the cable from the Mainboard and remove the adhesive tape to free the cable.

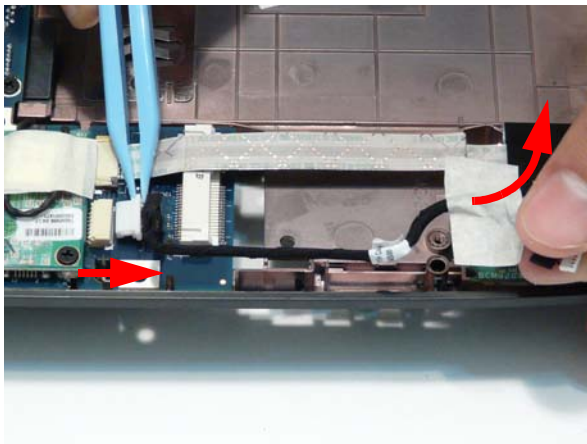


- 4. Remove the single securing screw and remove the module from the chassis.

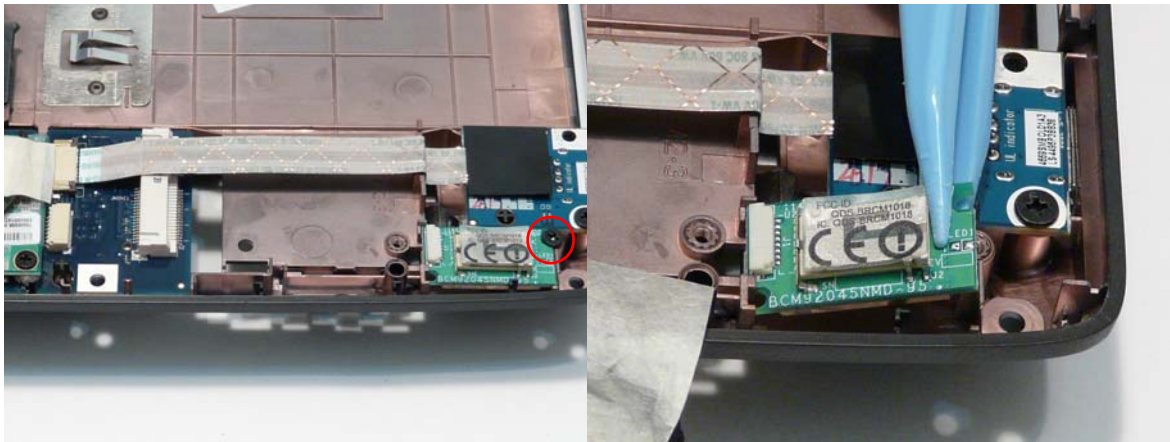


| Step | Size | Quantity | Screw Type |
|------------------|--------|----------|---|
| Bluetooth Module | M2.5*3 | 1 |  |


Removing the Mainboard

- 1. See “Removing the Upper Base” on page 79.
- 2. See “Removing the USB Board” on page 89.
- 3. See “Removing the Modem Module” on page 91.
- 4. See “Removing the Bluetooth Module” on page 92.
- 5. Grasp the RJ-11 cable and remove it from the Mainboard as shown.

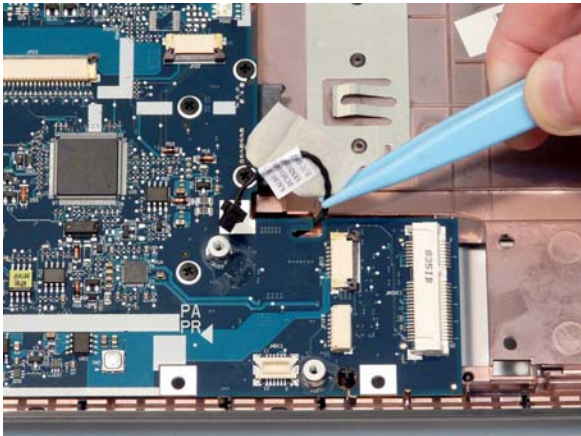


- 6. Remove the single securing screw.

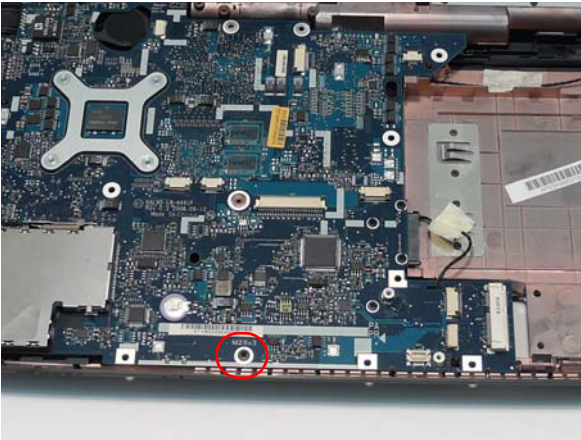


| Step | Size | Quantity | Screw Type |
|-----------|--------|----------|---|
| Mainboard | M2.5*3 | 1 |  |

-
7. Lift the mainboard right side first to remove from the base.

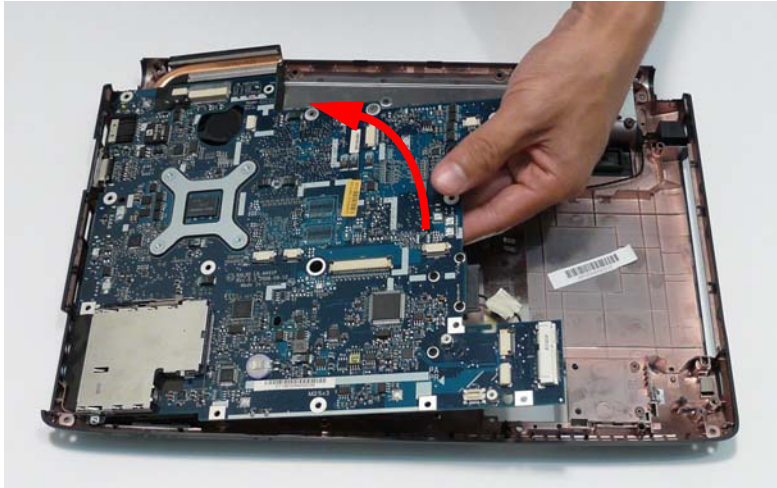


Removing the RJ-11 Port


1. See “Removing the Mainboard” on page 93.
2. Turn the Lower Base over and pull the Modem cable through the casing as shown.

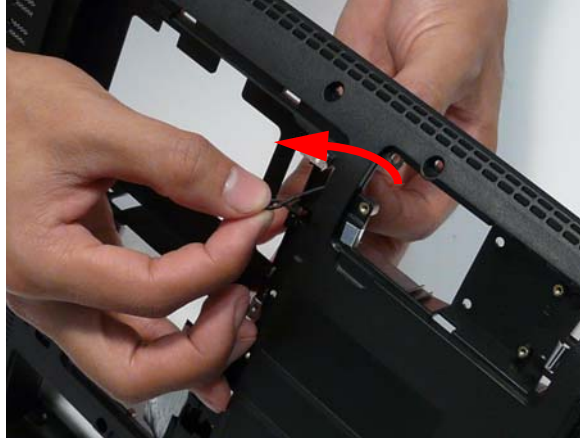


3. Completely remove the Modem cable from the cable channel.

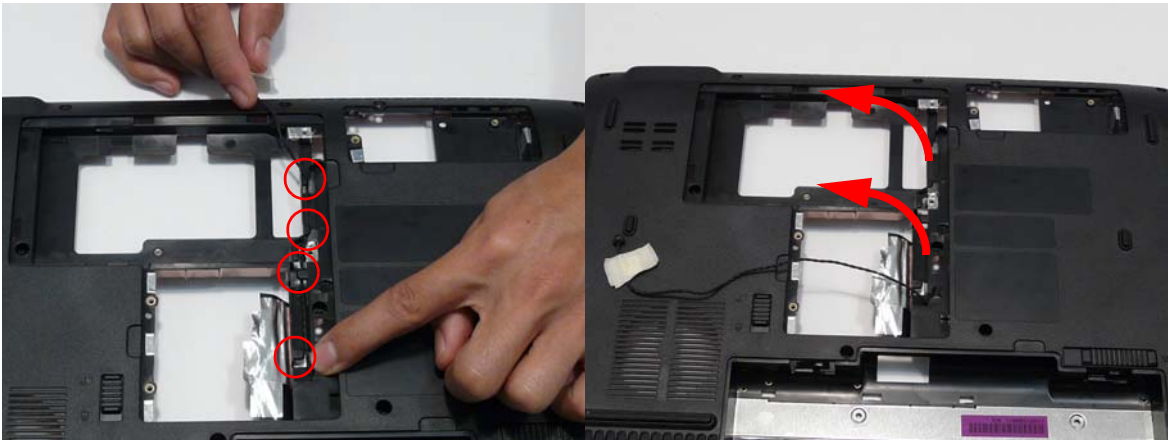


4. Turn the computer over. Pull the Modem cable completely through the casing as shown.

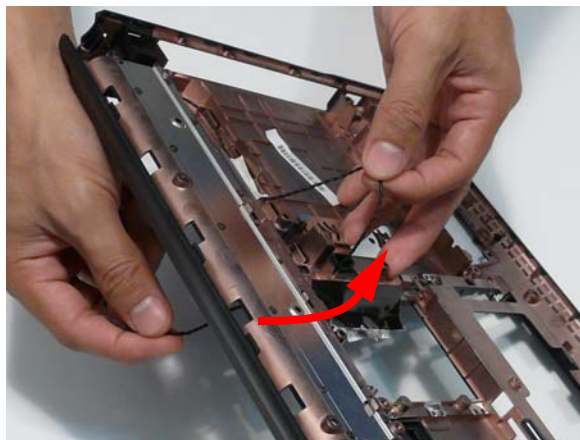


5. Remove the adhesive tape and lift the cable out of the cable channel as shown.

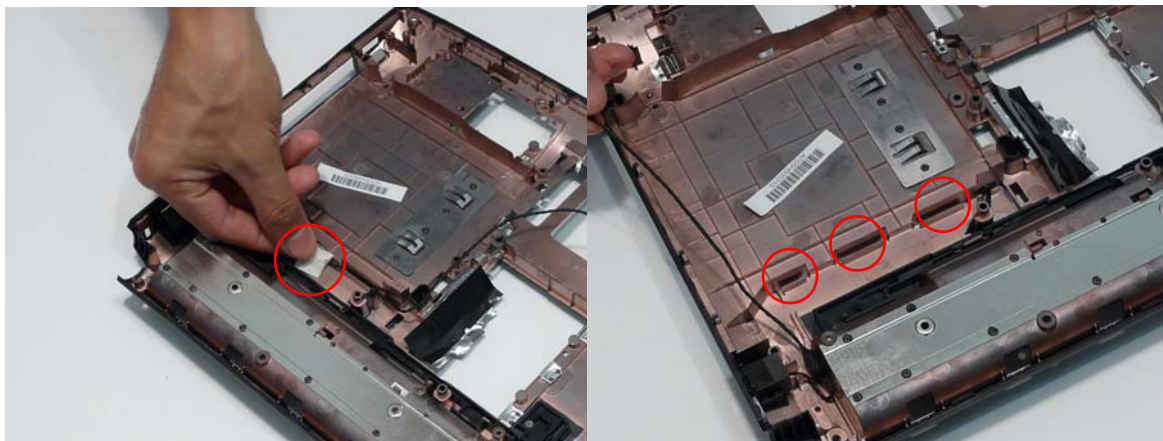

6. Detach the adhesive and lift the cable bundle out of the casing.

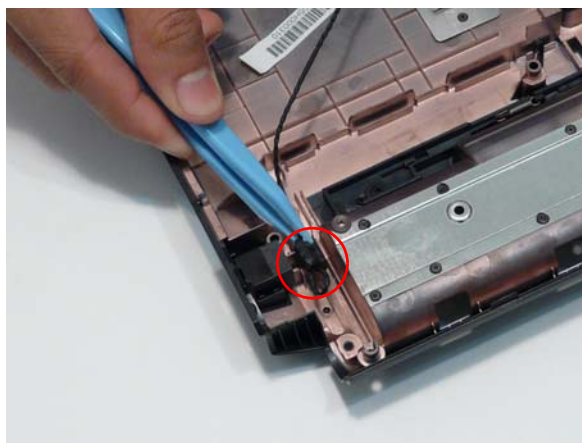


7. Remove the RJ-11 Port from the casing.

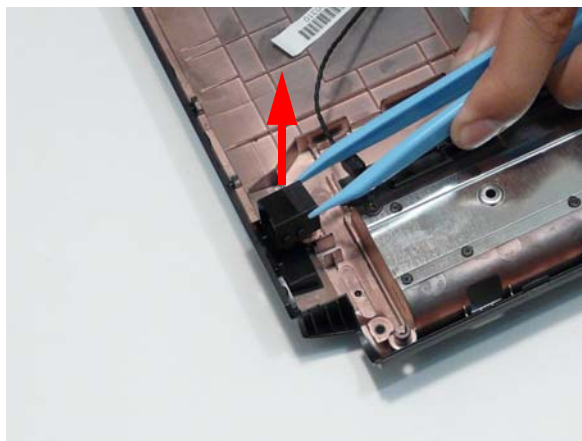



Removing the Thermal Module

- 1. See “Removing the Mainboard” on page 93.
- 2. Turn the Mainboard over and place on a clean surface.
- 3. Hold the fan cable connector and lift to disconnect from the mainboard.

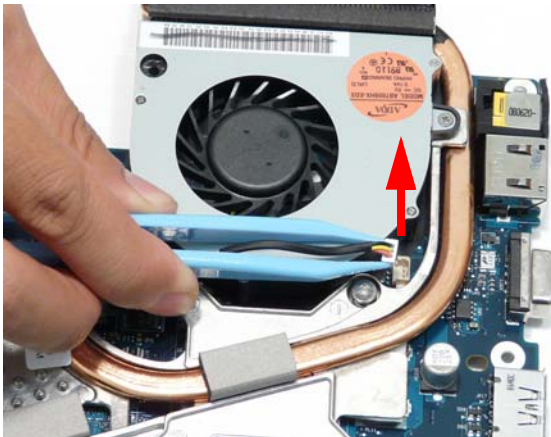


- 4. Remove the four screws from the Thermal Module numerically, from 4 to 1.

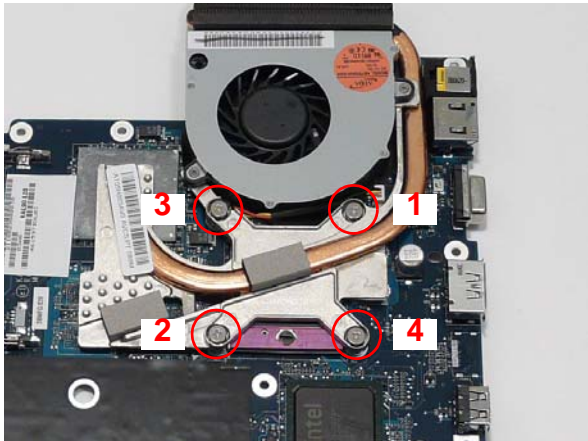


| Step | Size | Quantity | Screw Type |
|--------------------|------------|----------|---|
| CPU Thermal Module | M2.5*5*3.2 | 4 |  |

WARNING: To prevent damage to the Thermal Module or the CPU, hold and lift the Thermal Module by lifting both ends up and away at the same time.

5. Hold the module on both sides and lift it clear of the Mainboard.

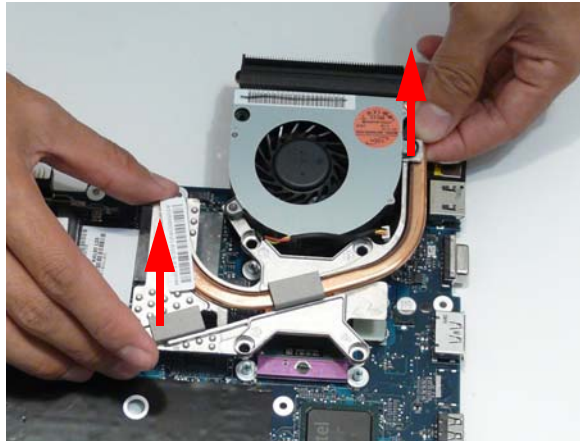


IMPORTANT: If the replacement Thermal Module does not include the thermal protection pad shown below, reuse the original thermal protection pad with the new Thermal Module.

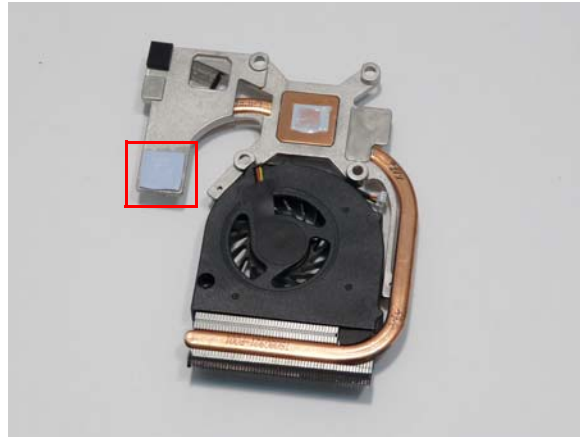


Removing the CPU

1. See “Removing the Thermal Module” on page 97.
2. Using a flat screwdriver, turn the CPU socket latch counter-clockwise 180° to release the CPU.

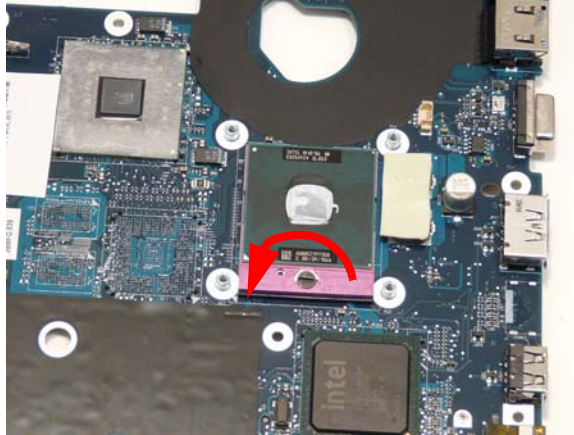


3. Lift the CPU clear of the Mainboard.

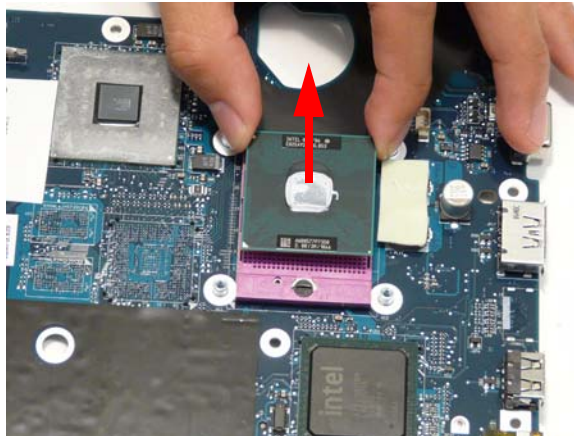

LCD Module Disassembly Process

LCD Module Disassembly Flowchart

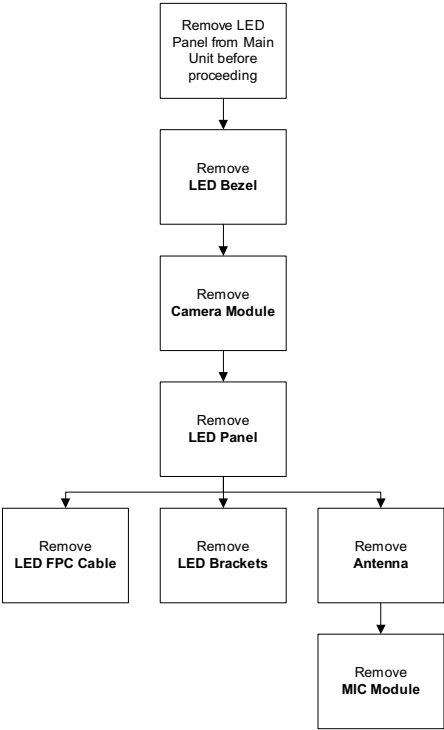


Screw List

| Step | Screw | Quantity | Part No. |
|---------------|--------|----------|--------------|
| LCD Bezel | M2.5*5 | 6 | 86.AD302.003 |
| Camera Module | M2.5*3 | 1 | 86.AD302.002 |
| LCD Panel | M2.5*5 | 2 | 86.AD302.003 |
| | M2.5*3 | 1 | 86.AD302.002 |
| LCD Brackets | M2*3 | 6 | 86.AD302.001 |

Removing the LCD Bezel

- 1. See "Removing the LCD Module" on page 74.
- 2. Remove the six screw caps and screws as shown.



| Step | Size | Quantity | Screw Type |
|-----------|--------|----------|---|
| LCD Bezel | M2.5*5 | 6 |  |

- 3. Starting at the centre of the top edge, pry the inside of the bezel away from the screen. Work round the edges to pry the bezel away from the screen as shown.




-
4. Lift the bezel away from the panel.




Removing the Camera Module

- 1. See “Removing the LCD Bezel” on page 101.
- 2. Remove the single screw from the Camera Bracket as shown.




| Step | Size | Quantity | Screw Type |
|---------------|--------|----------|---|
| Camera Module | M2.5*3 | 1 |  |

- 3. Lift the Camera Bracket, right side first, clear of the casing.

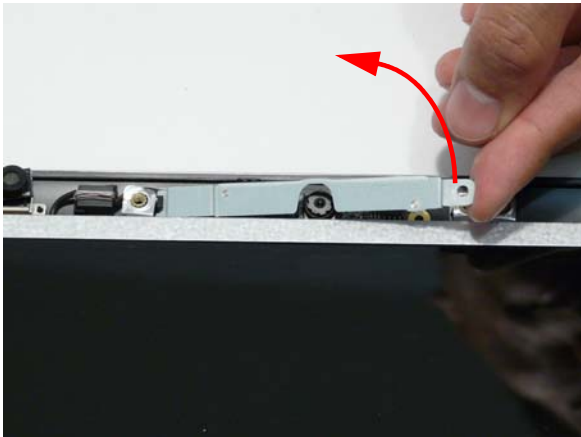

- 4. Lift the Camera Module clear of the casing and disconnect the cable from the Module.

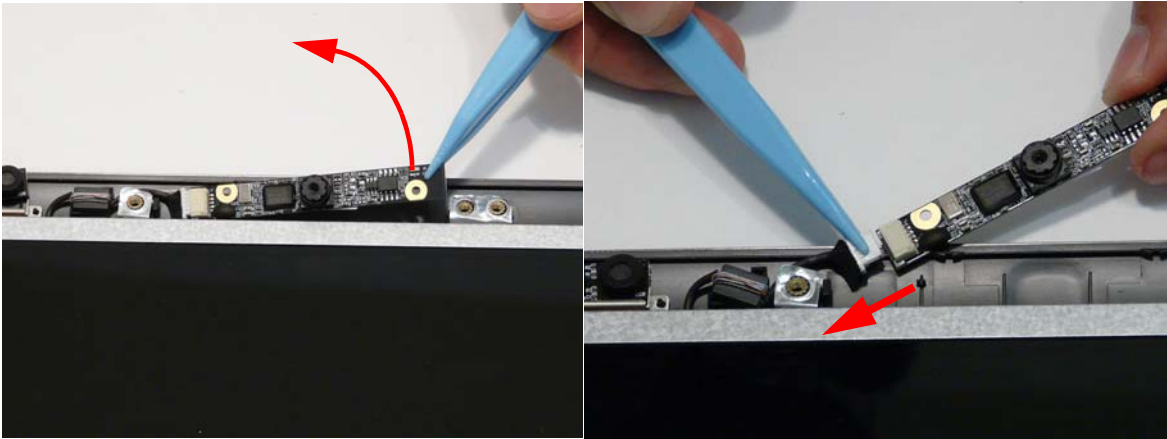



- 5. Remove the Camera Module.


Removing the LCD Panel

- 1. See “Removing the Camera Module” on page 103.
- 2. Remove the two securing screws from the LCD hinges and the single LCD grounding screw.



| Step | Size | Quantity | Screw Type |
|------------------------------|--------|----------|---|
| LCD Panel (red callout) | M2.5*5 | 2 |  |
| LCD Panel (green callout) | M2.5*3 | 1 |  |

- 3. Remove the Camera cable bundle from the top of the casing as shown.

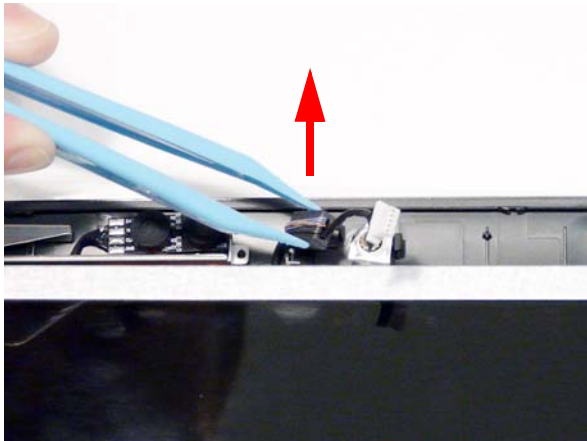


-
4. Lift the LCD Panel out of the casing as shown.




Removing the LCD Brackets and FPC Cable



- 1. See “Removing the LCD Panel” on page 104.
- 2. Turn the LCD Panel over on a clean surface, and lift the cable as shown to detach the adhesive.

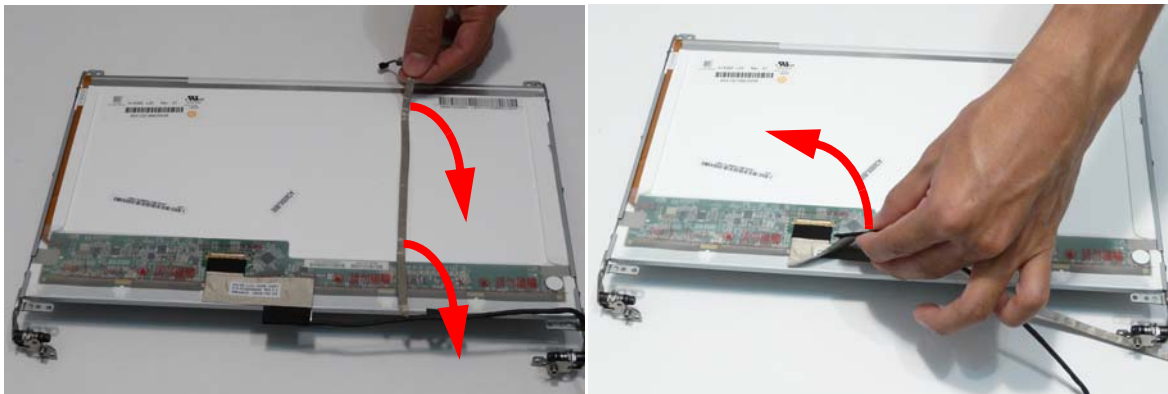


- 3. Grip the adhesive strip covering the LCD cable connector and pull it back (1).
- 4. Remove the cable from the panel as shown (2).

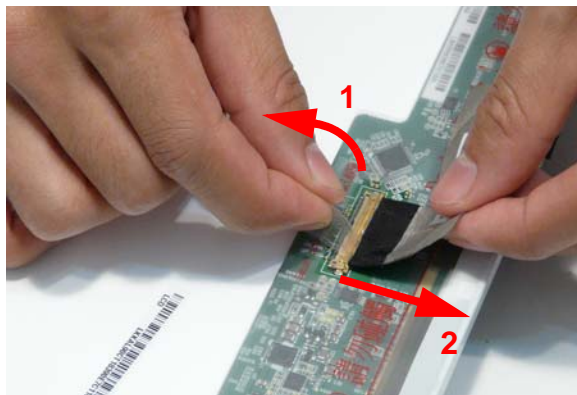

- 5. Remove the six securing screws (three on each side) from the LCD Panel brackets in numeric order, from 3 to 1.

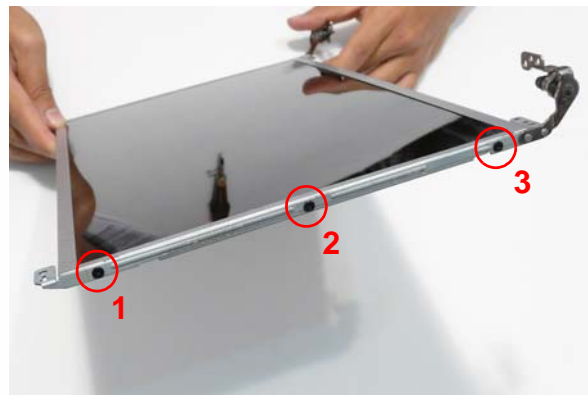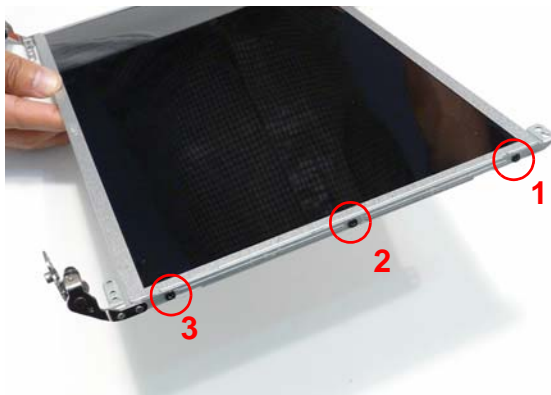

| Step | Size | Quantity | Screw Type |
|--------------|------|----------|---|
| LCD Brackets | M2*3 | 6 |  |


- 6. Remove the LCD brackets by pulling them away from the LCD Panel.

Removing the Antennas

1. See "Removing the LCD Panel" on page 104.
2. Remove the strips holding the antenna cables in place. Ensure the cables are free from obstructions.



3. Remove the tab securing the left and right antennas to the LCD module and lift the antennas clear.

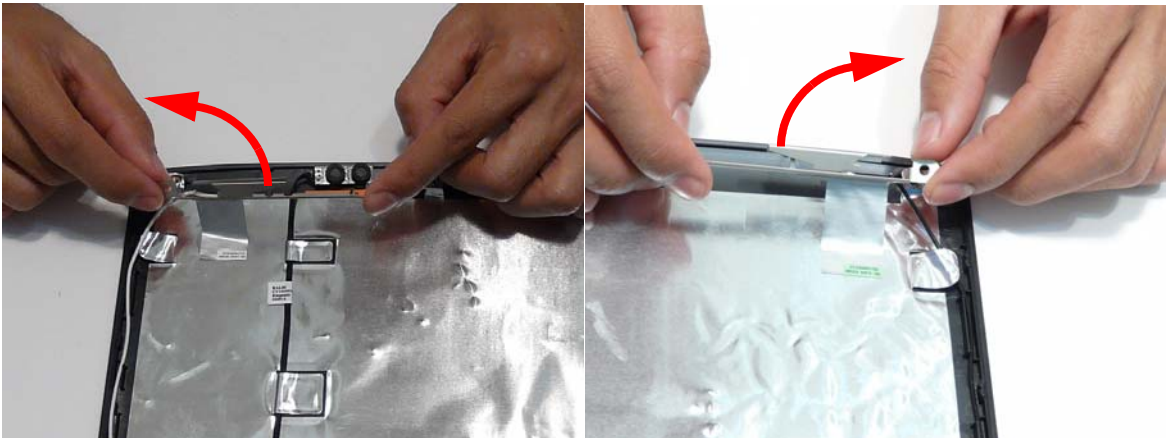


4. Remove the antenna cables and assembly from the LCD module.

Removing the MIC Module

1. See “Removing the Antennas” on page 107.
2. Remove the strips and tape holding the MIC Module cable in place. Ensure the cable is free from obstructions.




- 3. Remove the MIC cable and Module from the LCD module.**

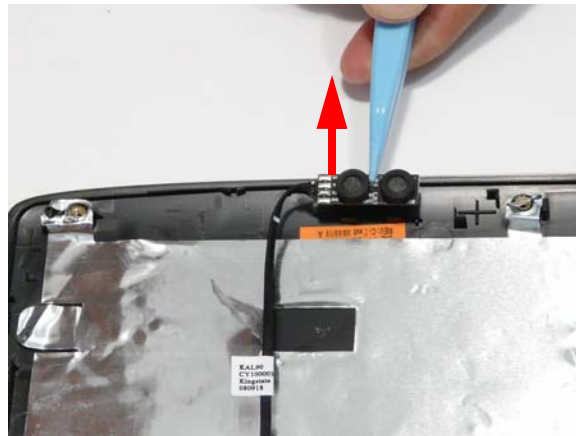

LCD Module Reassembly Procedure

Replacing the MIC Module

1. Replace the MIC Module in the LCD casing.
2. Run the cable as shown and replace the adhesive strips to hold it in place.

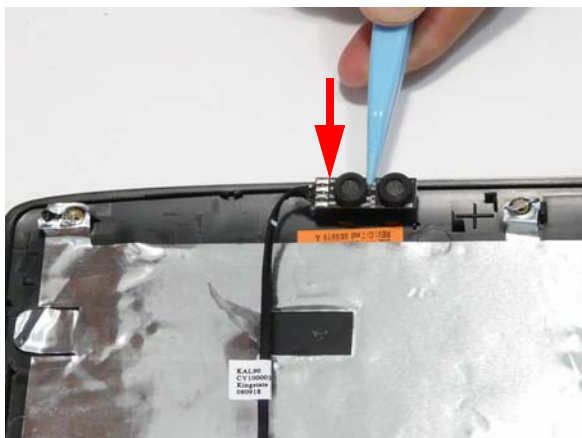


IMPORTANT: Ensure that the cable runs as shown in the hinge well area to avoid trapping.




Replacing the Antennas



1. Run the right side Antenna cable as shown in the hinge well to avoid trapping.
2. Run the cable as shown and replace the adhesive strip.

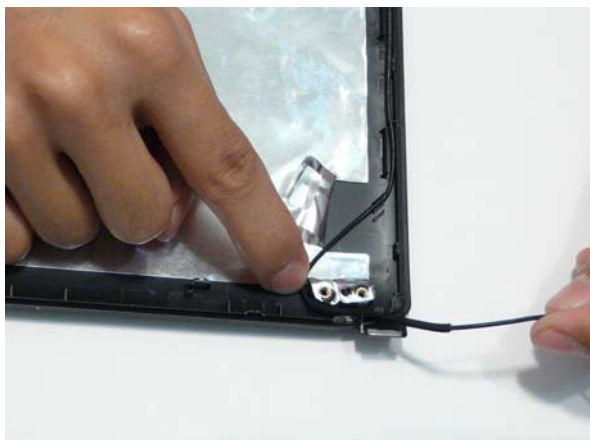


3. Run the cable along the edge of the casing using all available cable clips.
4. Run the cable as shown and replace the adhesive strip.

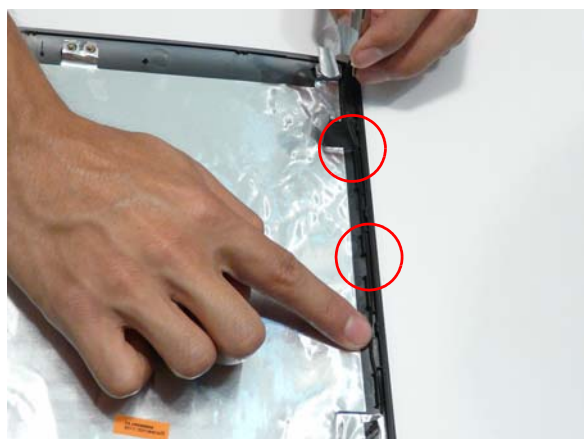


5. Replace the Antenna in the casing as shown and secure it in place with the tape.
6. Ensure that the securing pin is properly located.

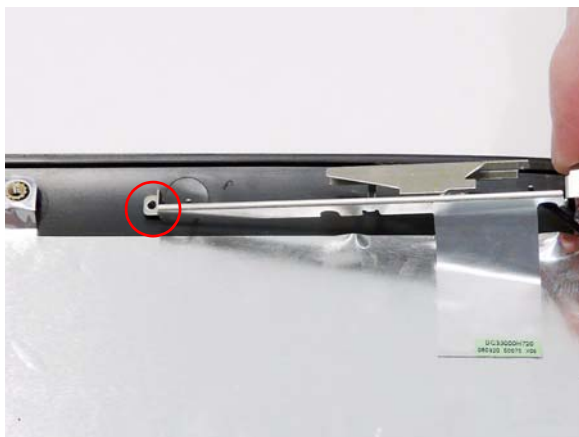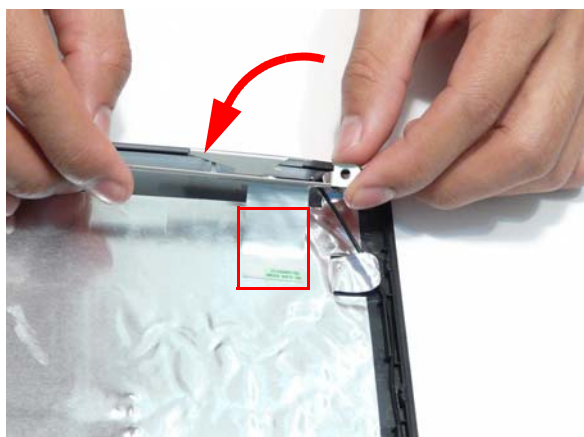


7. Run the left side Antenna cable as shown in the hinge well to avoid trapping.

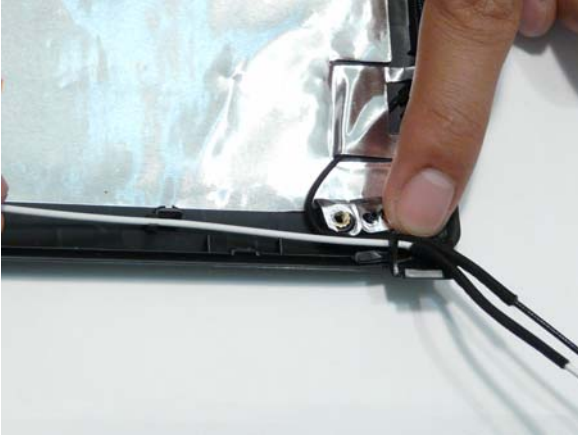


8. Run the cable along the edge of the casing using all available cable clips.

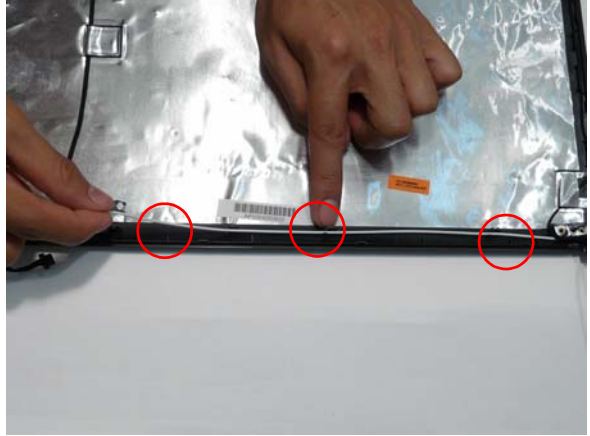


9. Run the cable as shown and replace the adhesive strip.

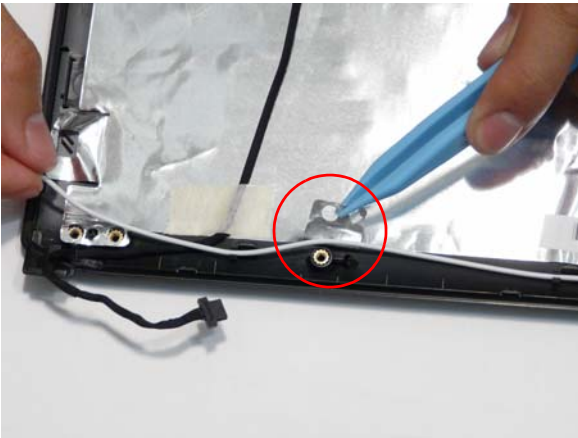


10. Run the cable as shown and replace the adhesive strip.

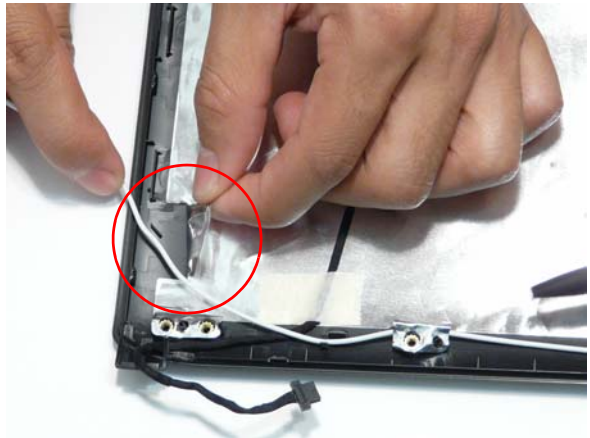


11. Run the cable along the edge of the casing using all available cable clips.

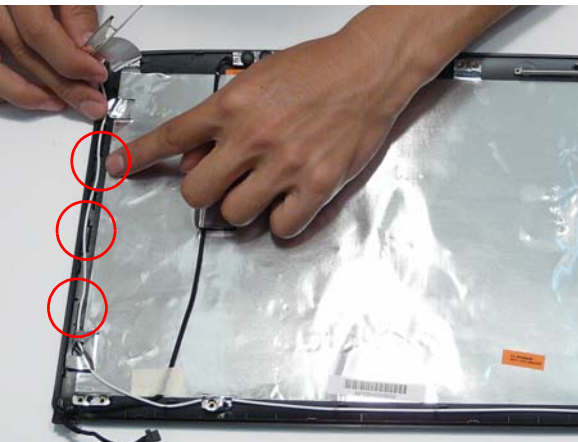

12. Replace the Antenna in the casing as shown and secure it in place with the tape.


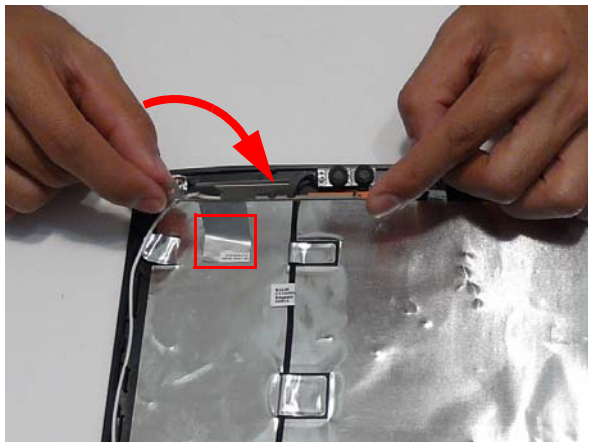


13. Ensure that the securing pin is properly located.


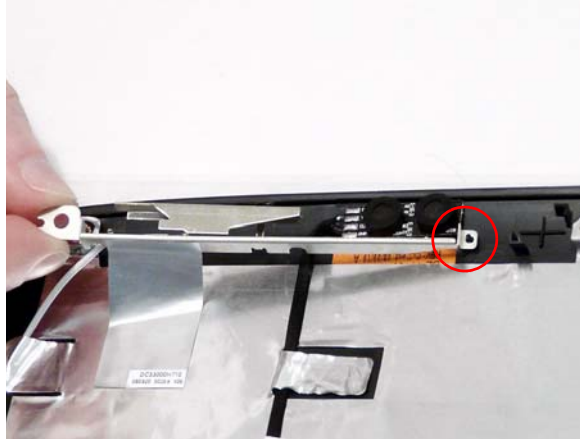


Replacing the LCD Panel

1. Align the LCD brackets with the six screw holes (three on each side) on the LCD Panel as shown.
2. Replace the six securing screws in numeric order, from 1 to 3.

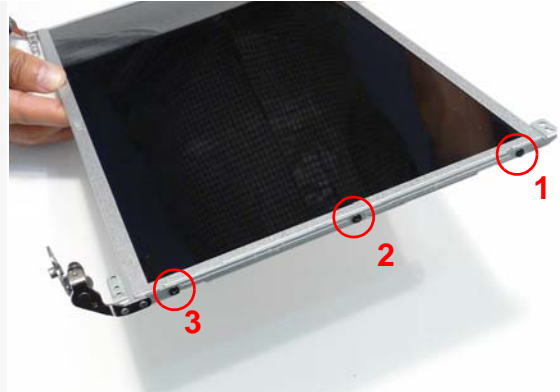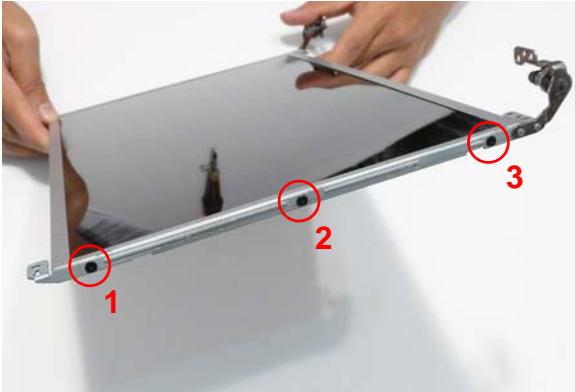


3. Turn the panel over. Insert the LCD Panel cable into the LCD Panel as shown (1). Secure the cable by replacing the securing strip (2).
4. Run the LCD cable as shown and press down along the length of the cable to secure it in place.

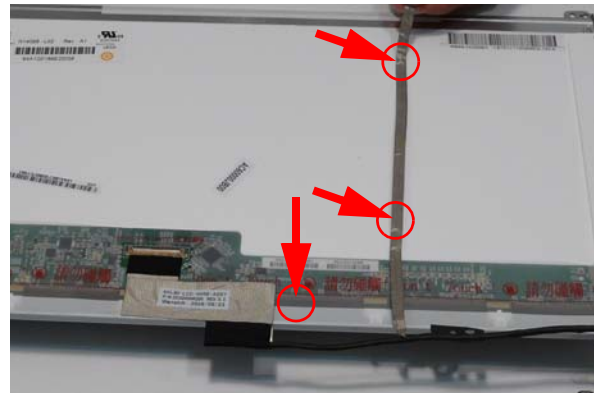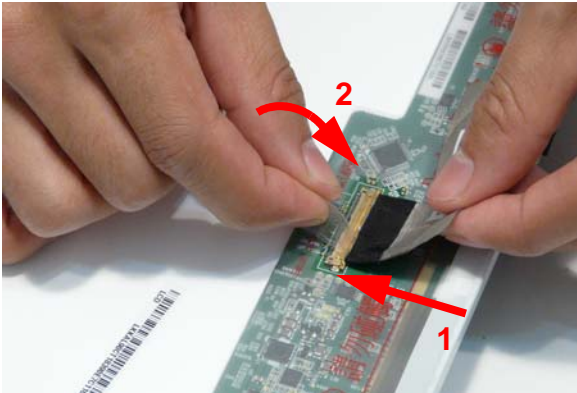

5. Insert the LCD panel into the casing back edge first as shown.
6. Ensure that the four locating pins are properly seated before continuing.



-
7. Replace the Camera Module cable bundle in the casing as shown.

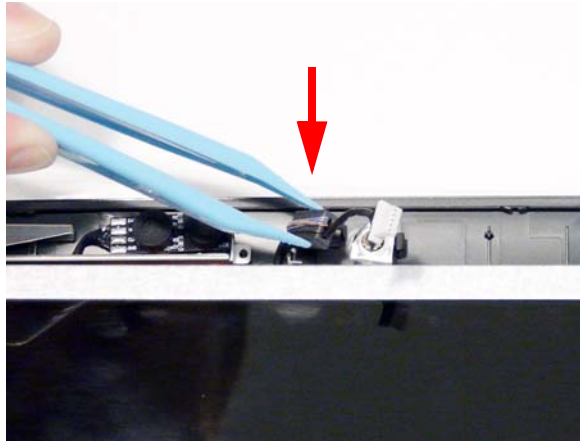



8. Replace the three screws to secure the panel and grounding within the LCD module.

IMPORTANT: When replacing the screws in the LCD brackets (red callout) do not use the screw holes marked with 'X'. These slots are reserved for the Bezel securing screws.




Replacing the Camera Module


1. Reconnect the LCD cable to the Camera Module.
2. Place the Camera Module in the casing as shown.

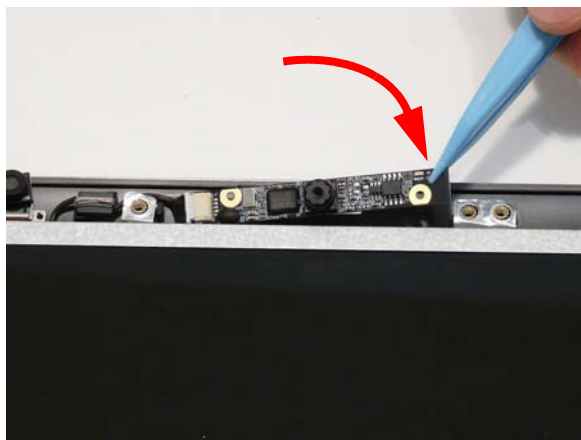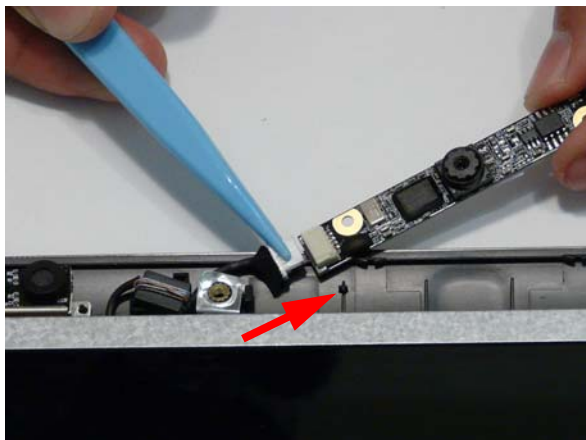

3. Ensure that the locating pins are correctly seated.
4. Insert the Camera Bracket left side first to engage the securing clip.

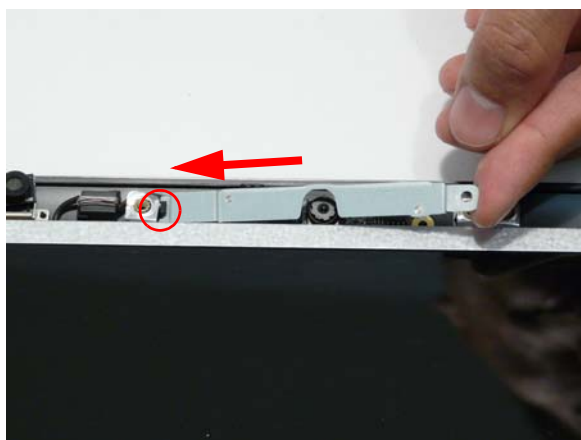

5. Lower the bracket into place as shown

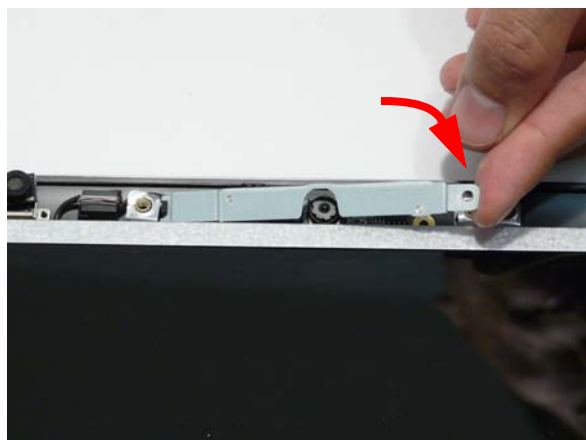

6. Replace the single securing screw.



Replacing the LCD Bezel

1. Place the Bezel on the casing bottom edge first and press in the areas marked to snap it into place.
2. Press down the sides of the bezel, working toward the top edge.



3. Press down the top edge to complete the process.

IMPORTANT: Ensure there are no gaps between the casing and the Bezel.



4. Replace the six securing screws and screw caps on the LCD bezel.




Main Module Reassembly Procedure


Replacing the CPU

IMPORTANT: The CPU has a Pin1 locator that must be positioned corresponding to the marker on the CPU socket.

1. Place the CPU into the CPU socket as shown, taking note of the Pin1 locator.

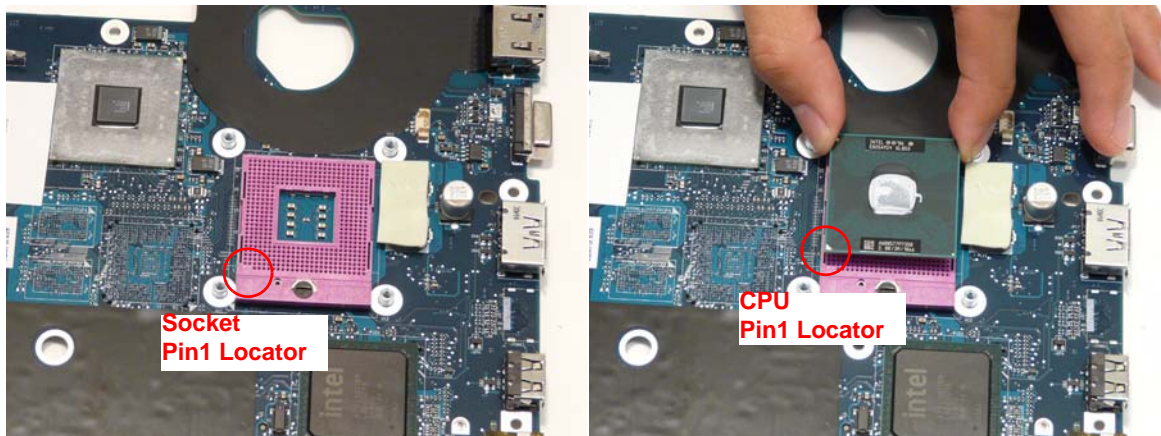


2. Using a flat-bladed screw driver, rotate the CPU locking screw 180° clockwise to secure the CPU in place.

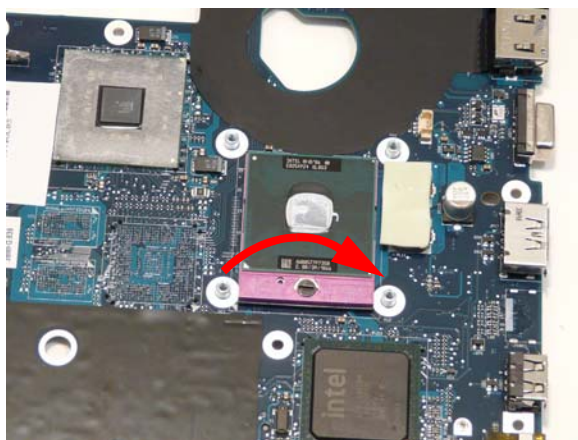



Replacing the Thermal Module

WARNING: To prevent damage to the Thermal Module or the CPU, hold the Thermal Module by both ends at the same time.


IMPORTANT: If the replacement Thermal Module does not include the thermal protection pad shown below, reuse the original thermal protection pad with the new Thermal Module.

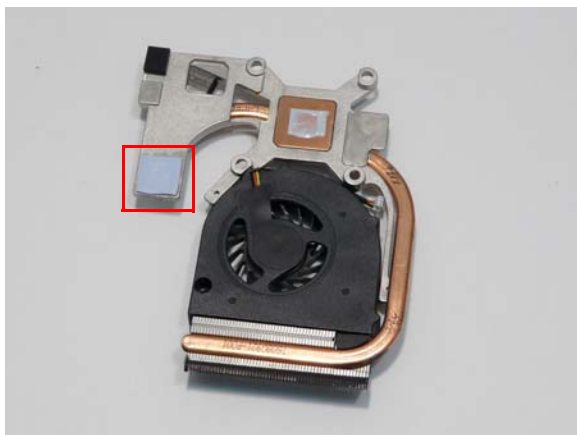

1. Align and place the Thermal Module in the on the mainboard as shown.
2. Remove the four screws from the Thermal Module numerically, from 1 to 4.

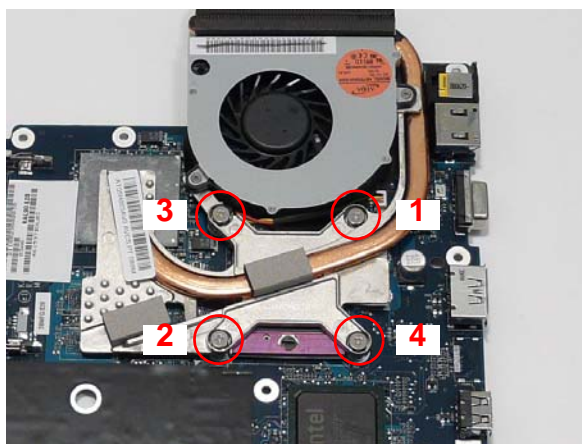
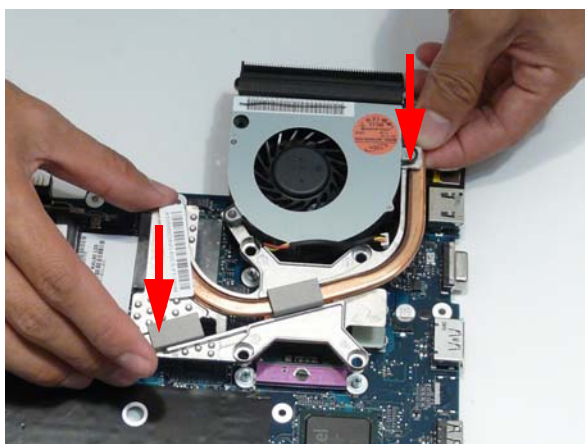


3. Connect fan cable to the mainboard as shown.


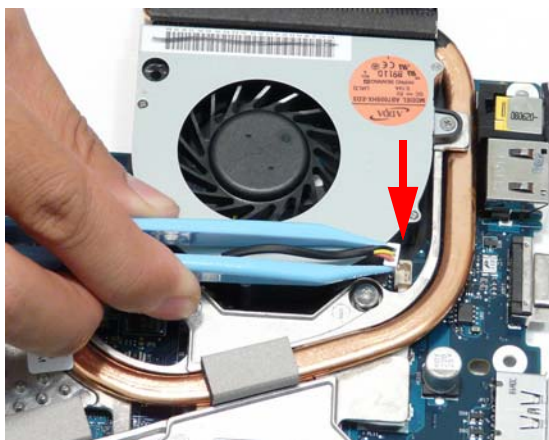


Replacing the RJ-11 Port



1. Replace the RJ-11 Port in the casing as shown.
2. Place the cable bundle in the casing and apply pressure to secure the adhesive in place.

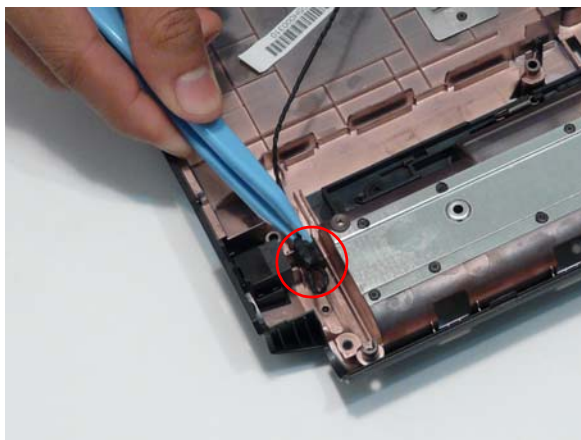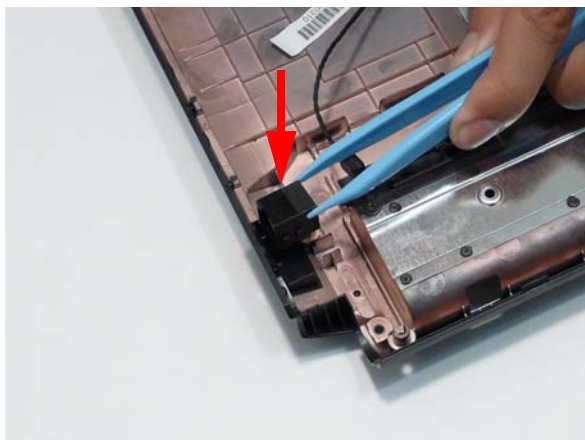


3. Run the cable along the cable channel using all available cable clips.
4. Replace the adhesive tape and insert the cable through the casing as shown.

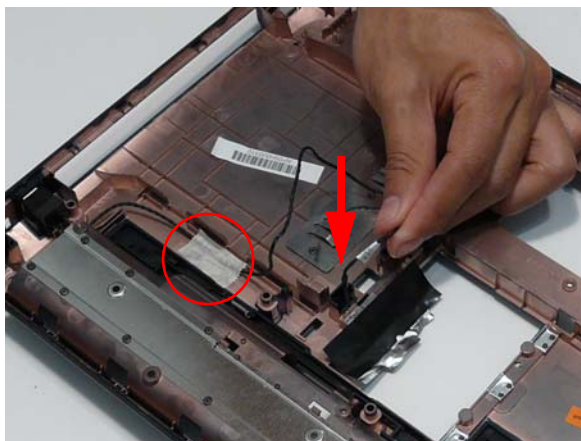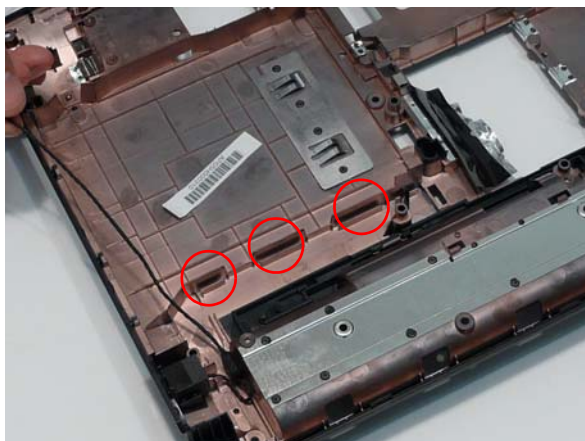

5. Pull the cable through the casing completely.
6. Turn the computer over and run the cable along the cable channel using all available cable clips.

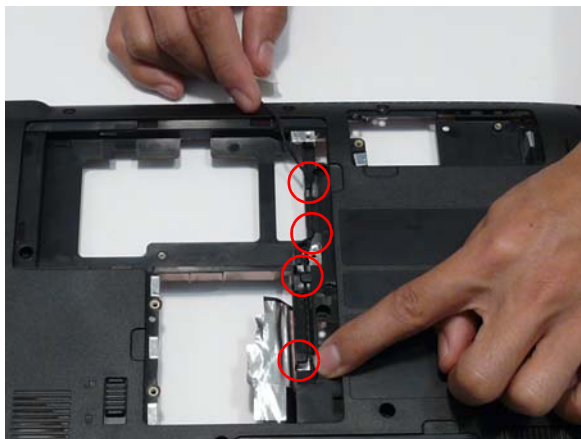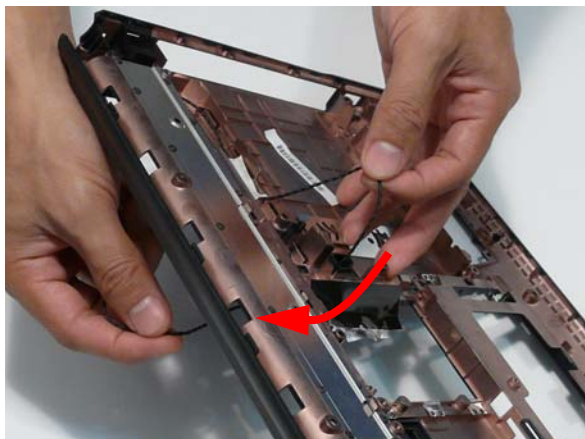


-
7. Insert the cable through the casing to the top side as shown.

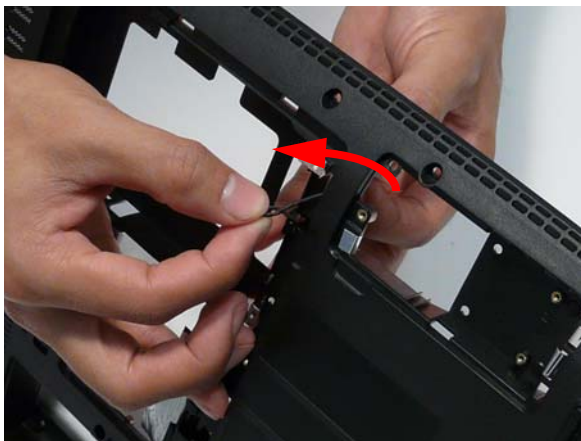


Replacing the Mainboard

1. Ensure that the Mainboard is face up. Place the Mainboard in the chassis, left hand edge first to allow the I/O Ports through the casing, then lower it into place.

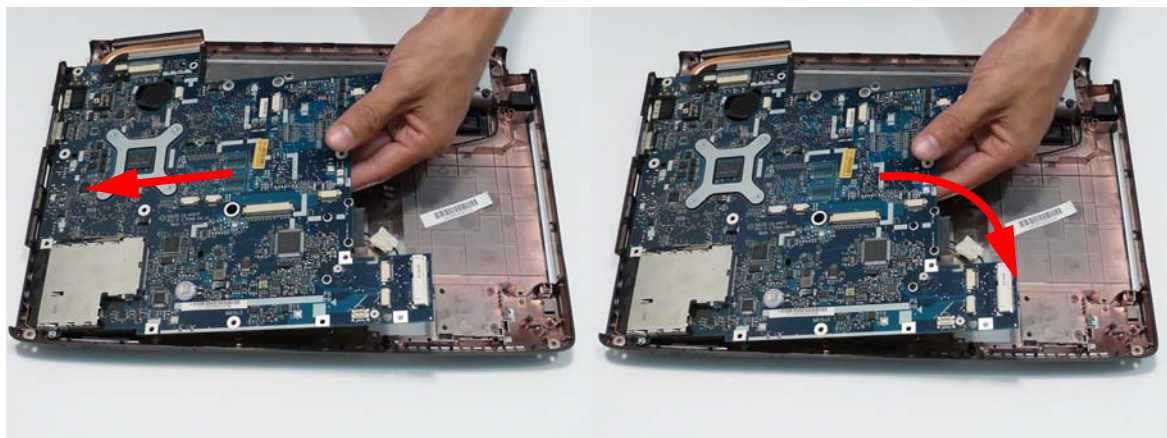


2. Ensure the screw socket is aligned. Replace the single securing screws as shown.

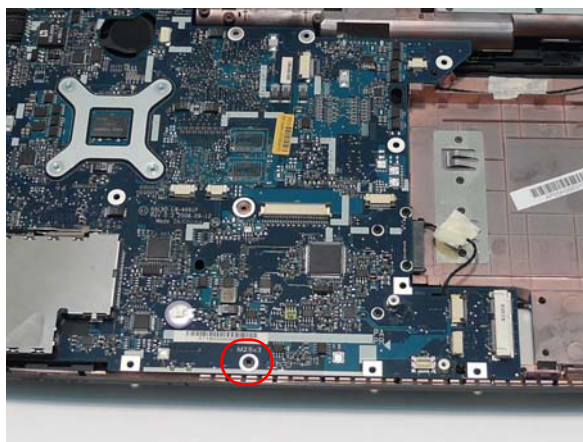



NOTE: Make sure the I/O ports are positioned correctly through the lower cover, and the screw sockets are visible through the mainboard.

3. Replace the RJ-11 cable in the retaining clip on the Mainboard.


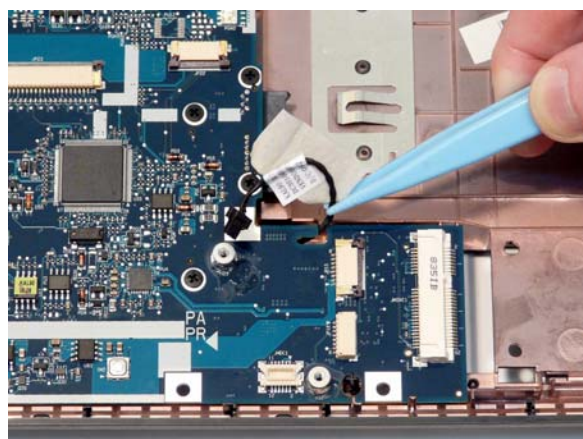


Replacing the Bluetooth Board

1. Insert the Bluetooth Module left side first and lower it into place.
2. Replace the single securing screw.

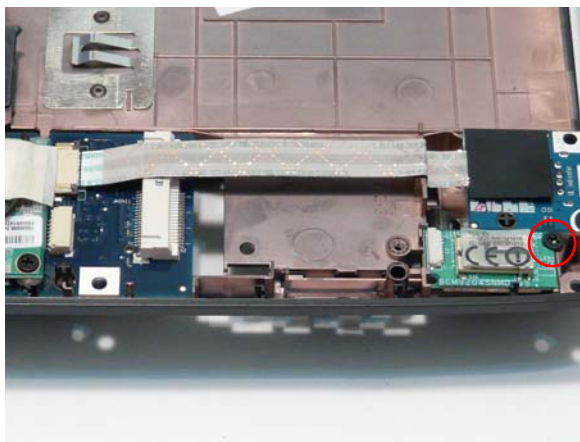
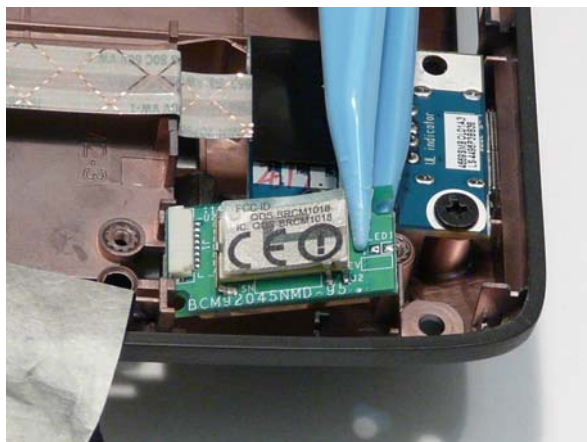


3. Reconnect the Bluetooth cable to the Mainboard and secure the cable in place with the tape.
4. Reconnect the Bluetooth cable to the Bluetooth Module.

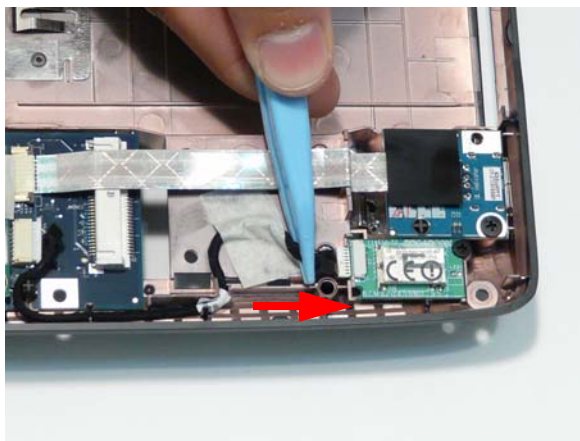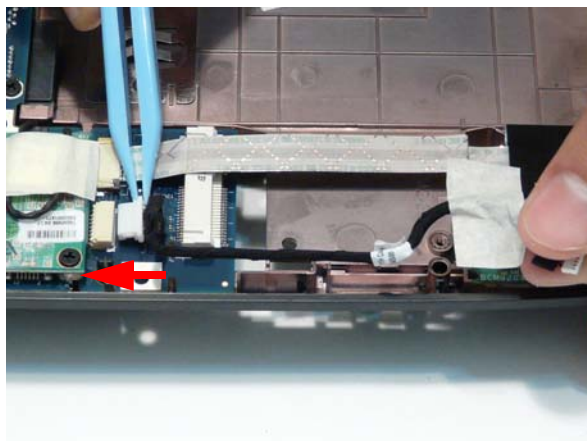


Replacing the Modem Module


1. Connect the modem cable as shown.
2. Replace the Modem Module on the Mainboard.

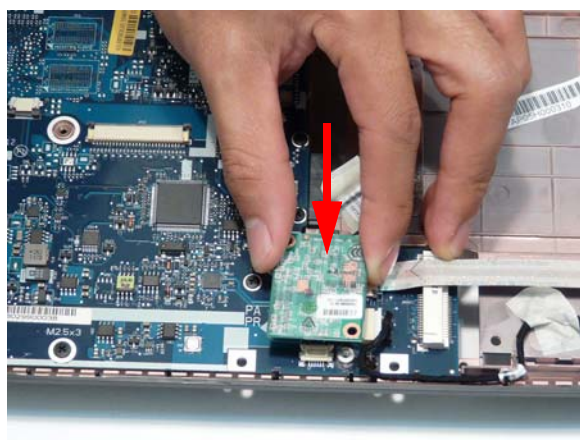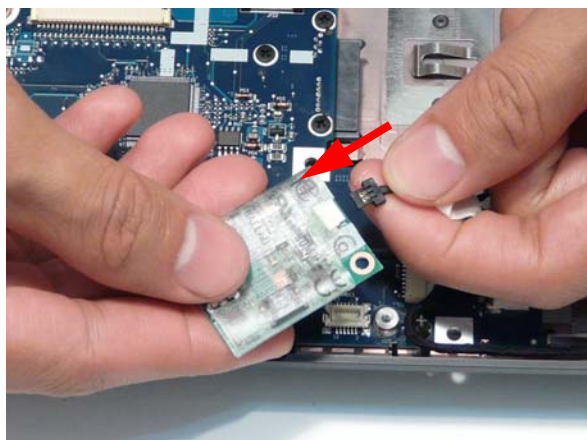

3. Align the screw sockets and replace the two screws.


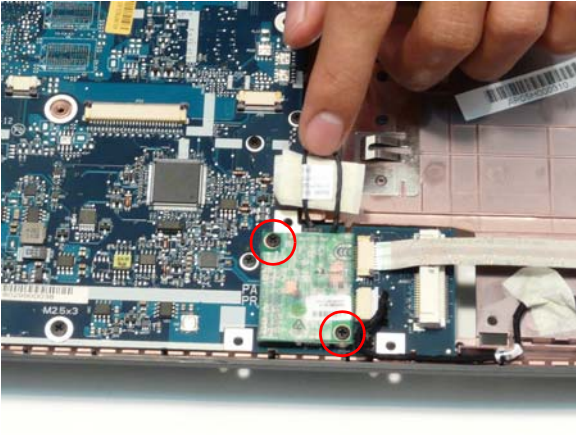


4. Secure the Modem cable in place with the adhesive tape.

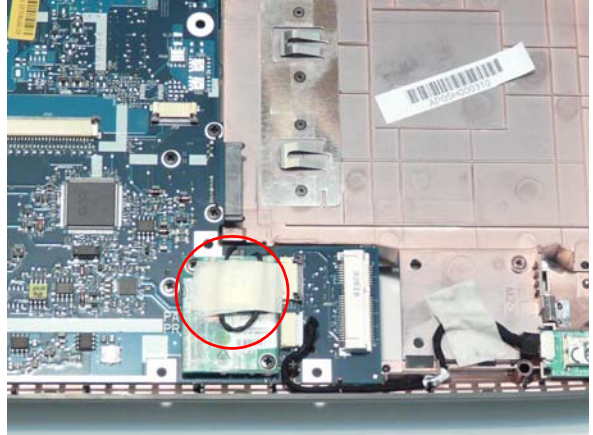


Replacing the USB Board


1. Insert the USB Board into the casing, ensuring that the USB Port is accessible through the case.
2. Run the cable along the casing and insert it into the FFC connector.

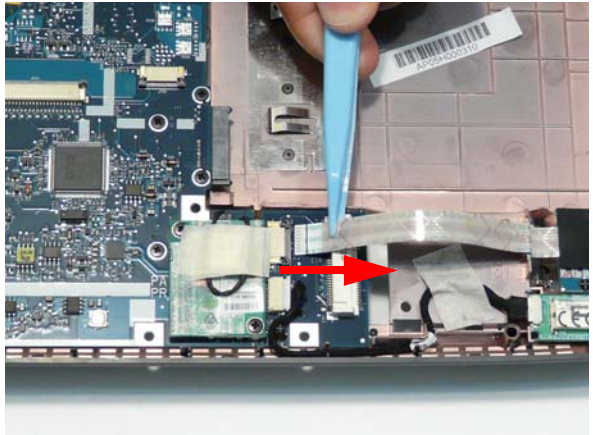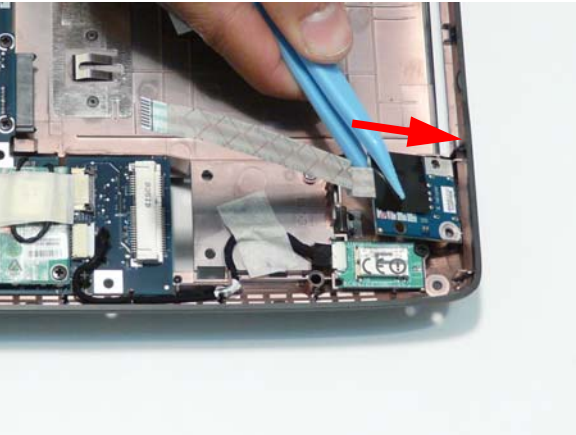

3. Lock the connector and press down on the FFC cable to secure it on the casing.

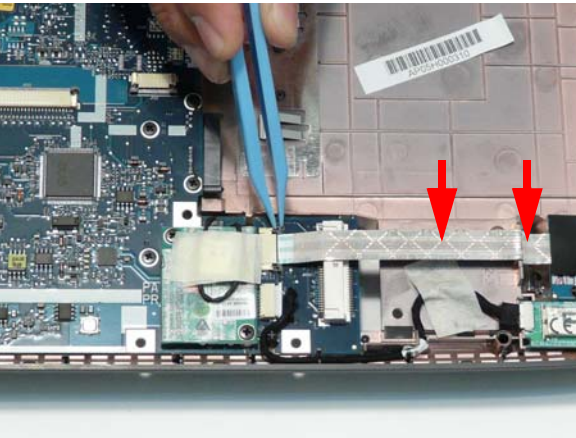


4. Ensure the locating pins is correctly seated and replace the single securing screw.

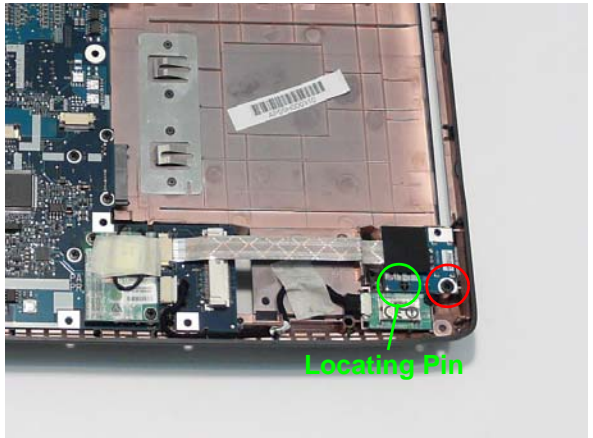


Replacing the Media Board


1. Insert the Media Board FFC through the Upper Base as shown, and place the board in the bay.

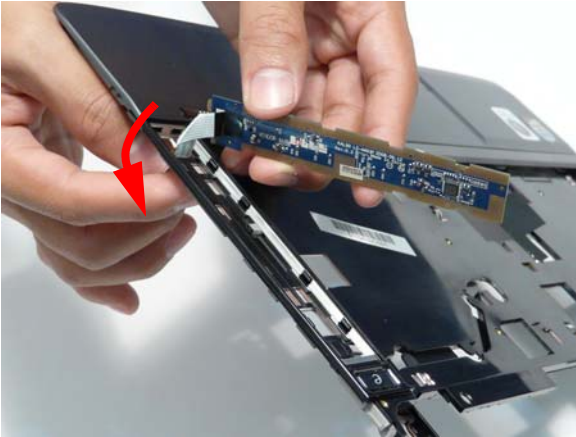


2. Slide the Media Board in the direction of the arrow to engage the securing clips.

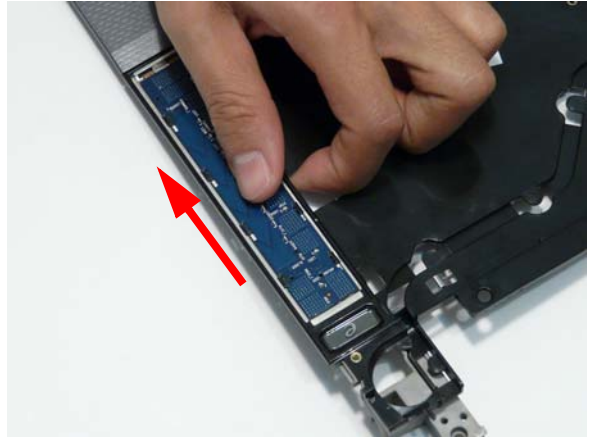

3. Press the Media Board down to secure it in place.

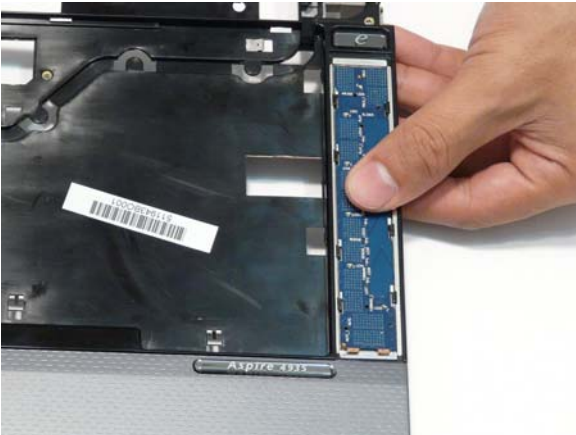


4. Place the Backlight Panel on the Media Board Cover and press down over the entire surface.

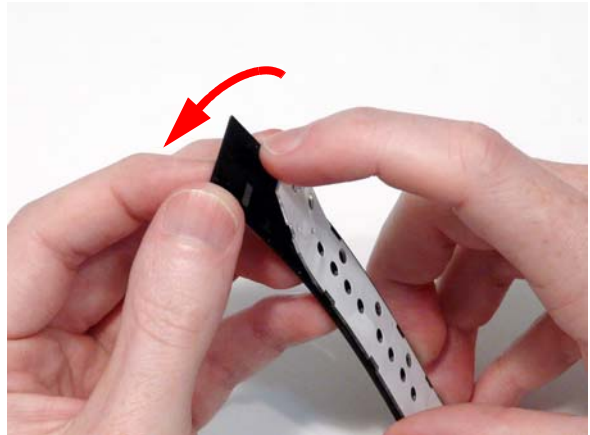

5. Replace the Media Board Cover and press down to secure it in place.





6. Turn the Upper Base over and run the FFC cable along the casing as shown. Press down to secure it in place.

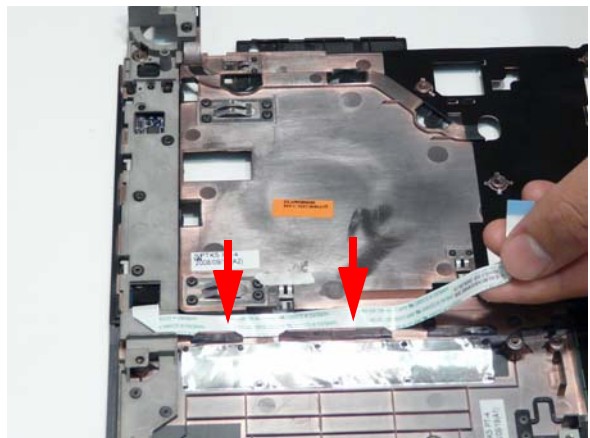


Replacing the eKey Board

1. Place the eKey Board in the Upper Base, right side first, to engage the securing clip.
2. Run the FFC cable along the casing as shown. Press down to secure it in place.

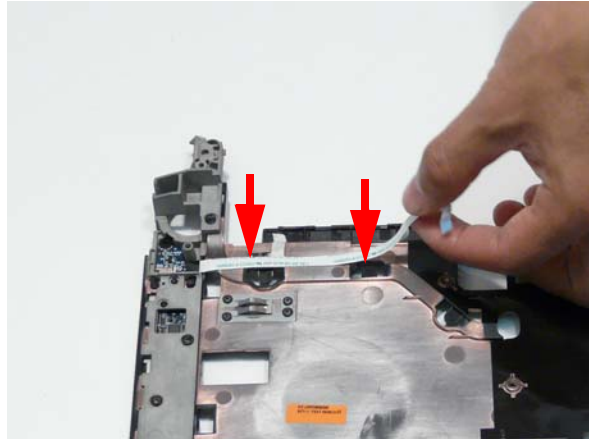
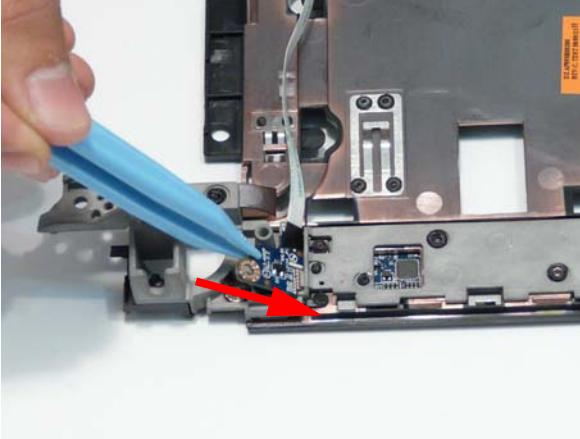


3. Replace the single securing screw.

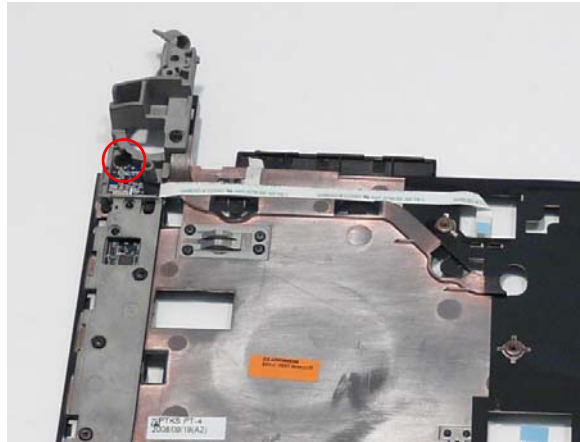


Replacing the TouchPad Bracket

1. Place the TouchPad in the casing.
2. Replace the two securing screws.

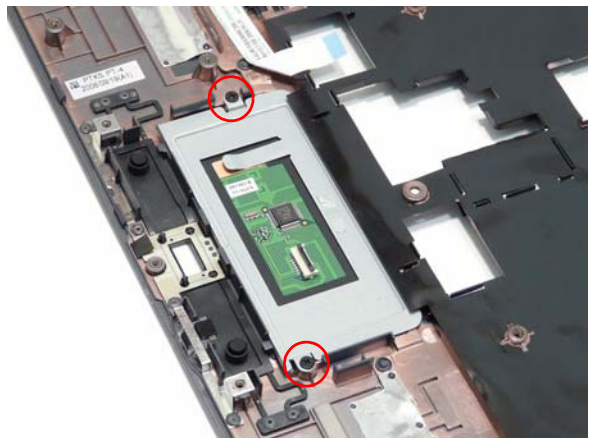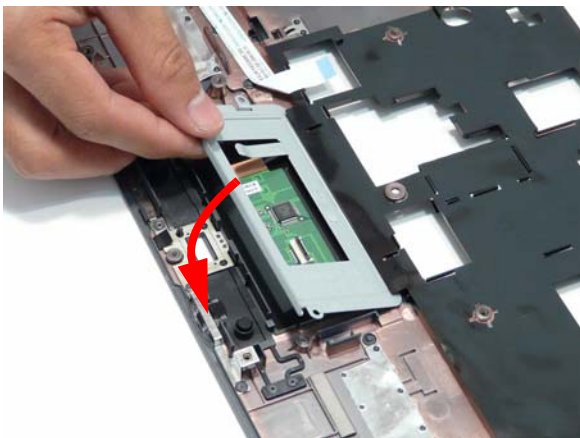

3. Replace the FFC and close the locking latch.

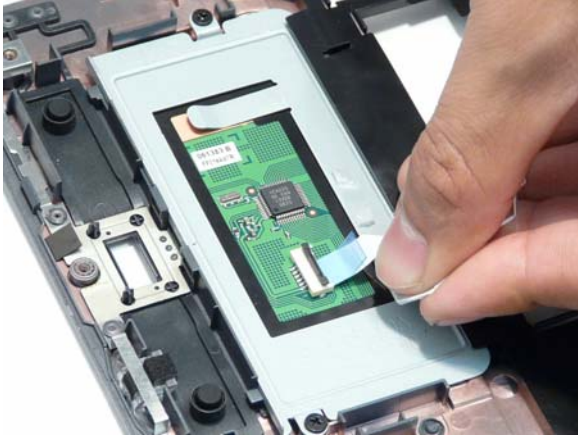


4. Run the cable along the Bracket and press down to secure it in place.




Replacing the Finger Print Reader


1. Replace the Finger Print Reader in the Upper Cover in the direction of the arrow.

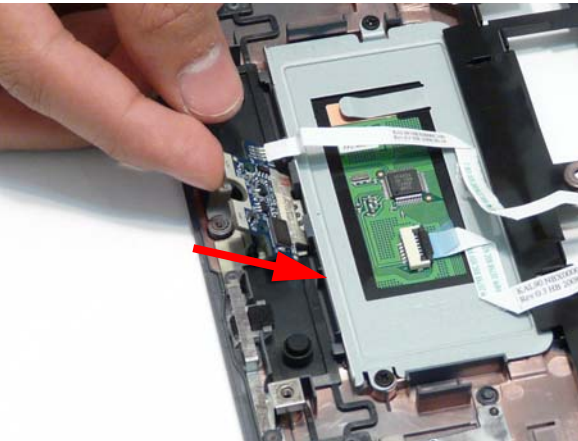


2. Run the FFC along the TouchPad bracket, as shown, and press down to secure it in place.

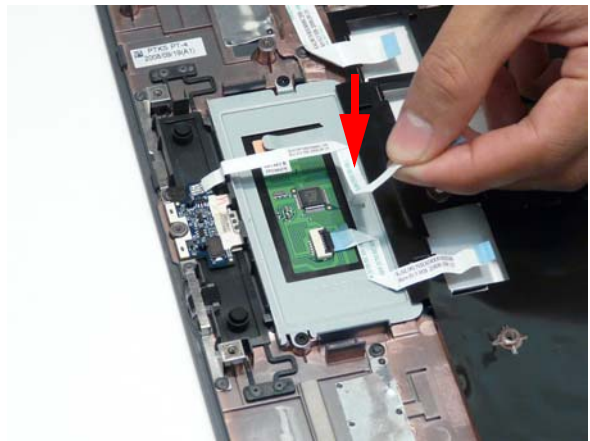

3. Replace the Finger Print Reader Bracket rear edge first and lower it into place.

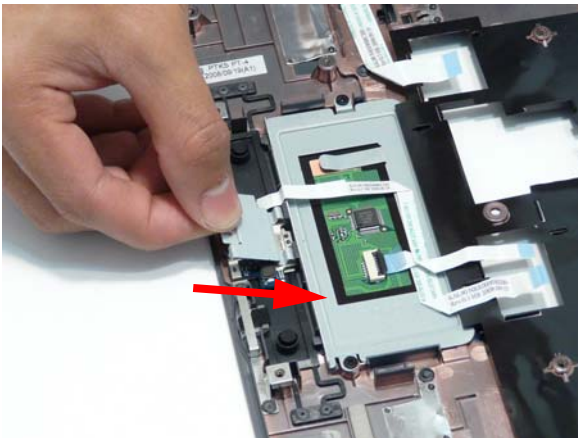

4. Replace the single securing screw.

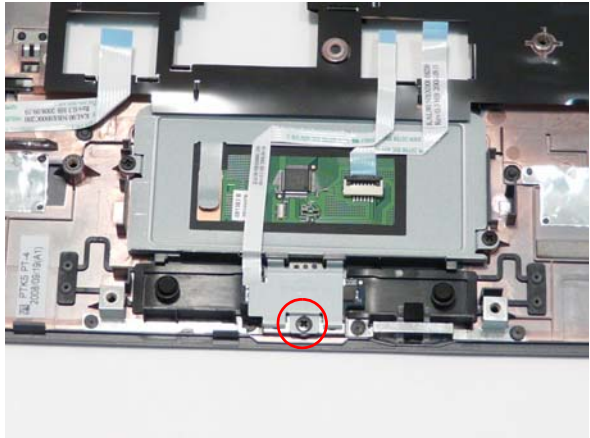

Replacing the Upper Cover

WARNING: Care must be taken when replacing the Upper Cover to prevent damage or stress to the surface.


1. Place the Upper Cover on the Lower Cover, front edge first, and lower it into place.



2. Starting with the sides, press down all around the perimeter of the cover to secure it in place.




3. Reconnect the four FFC cables to the mainboard.

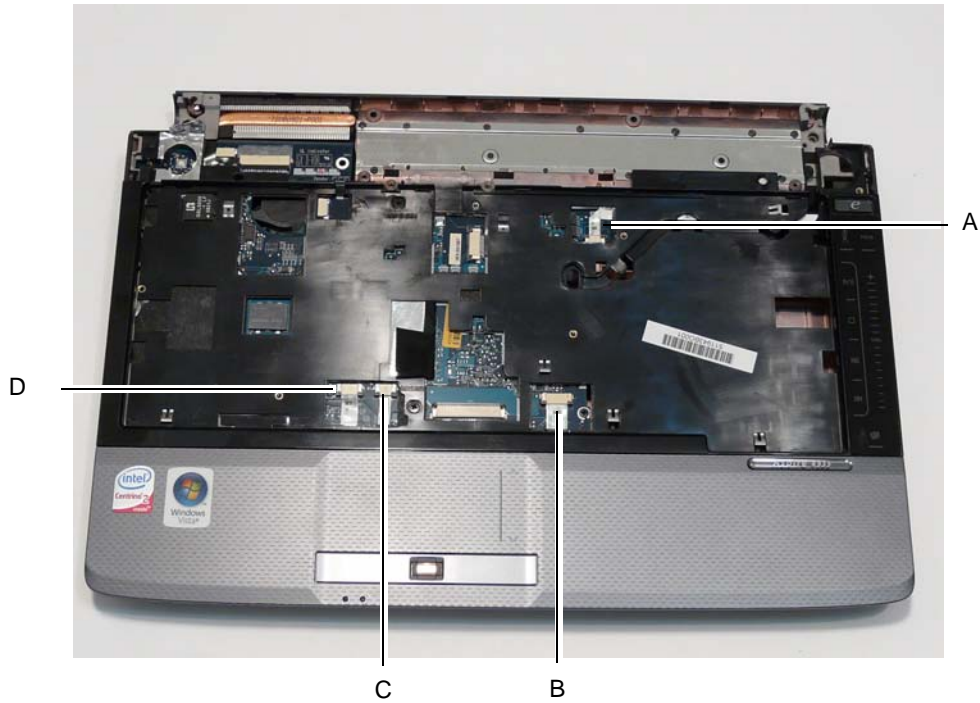


Connect A as shown and lock the connector.



Connect B as shown and lock the connector.

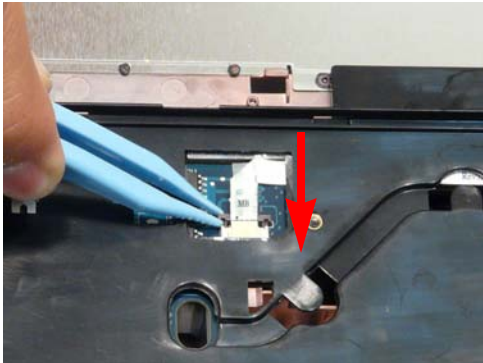

Connect C as shown and lock the connector.

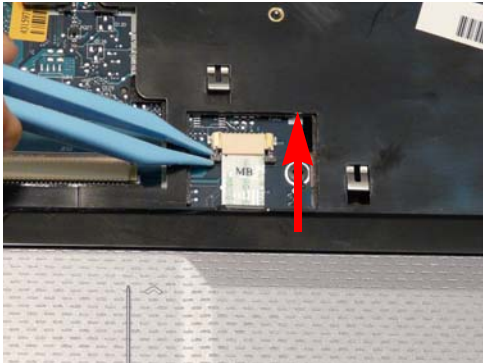


Connect D as shown and lock the connector.

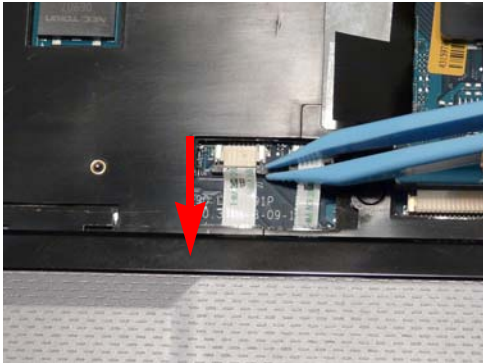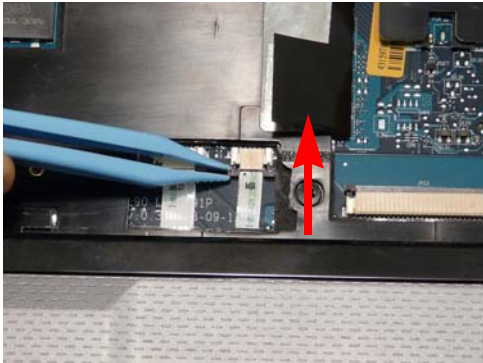

-
4. Replace the two securing screws in the Upper Cover.





5. Turn the computer over. Replace the fifteen screws on the bottom panel.


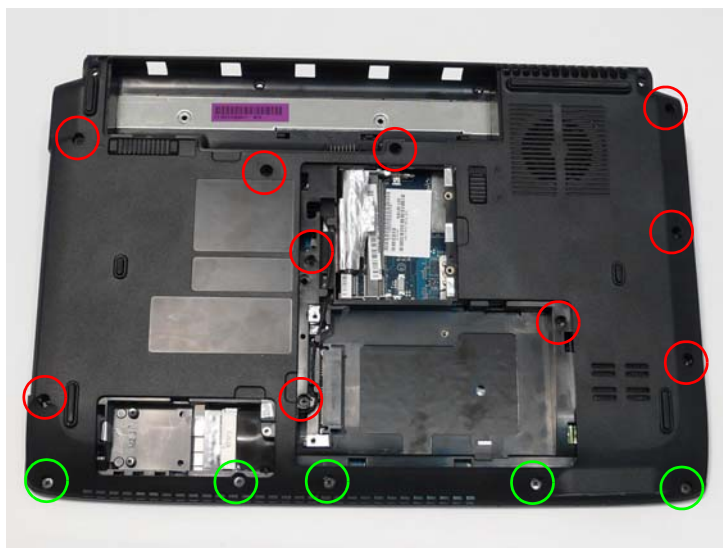


Replacing the LCD Module



1. Carefully align the LCD module over the hinge sockets and lower the module into the chassis, taking care not to trap the LCD cables.
2. Replace the two securing screws on the right hinge as shown.

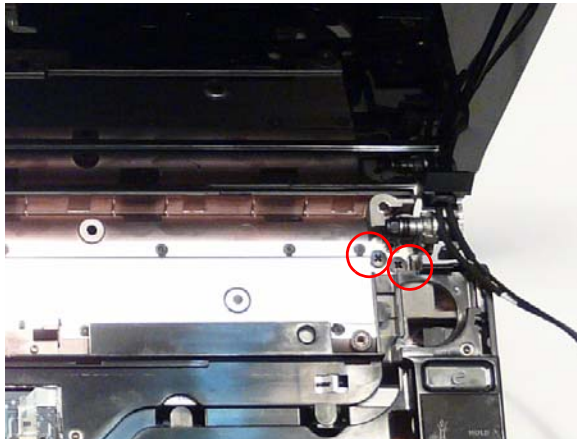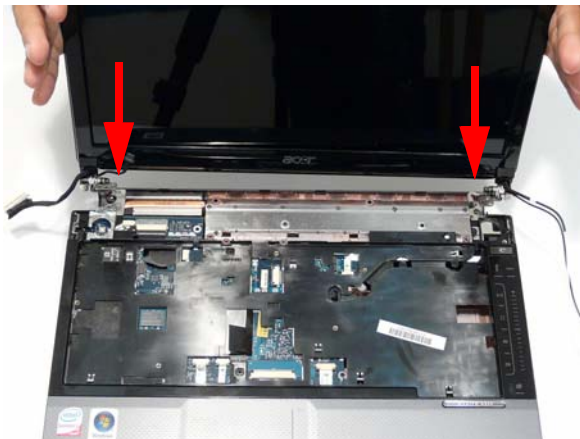

3. Replace the adhesive strip on the left hinge.
4. Replace the two securing screws on the left hinge as shown.

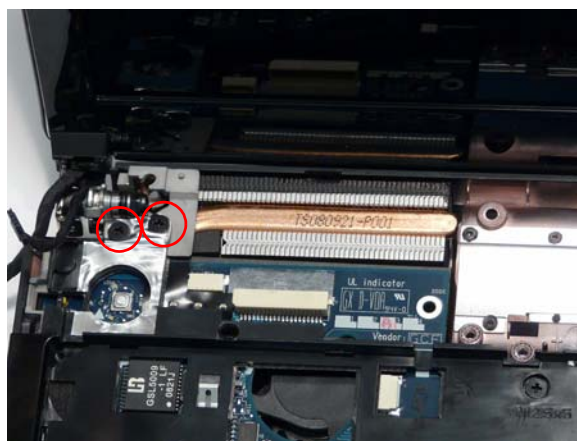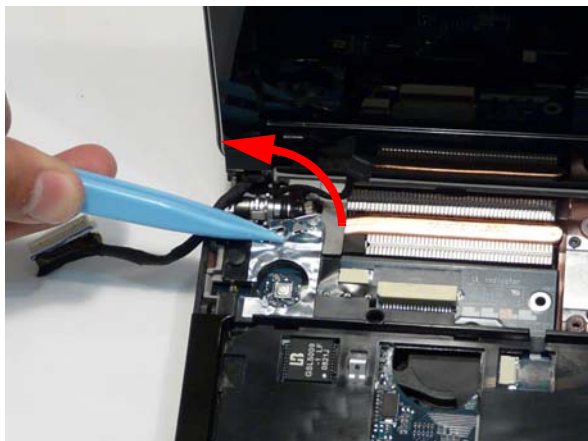


5. Reconnect the LCD cable to the Mainboard.

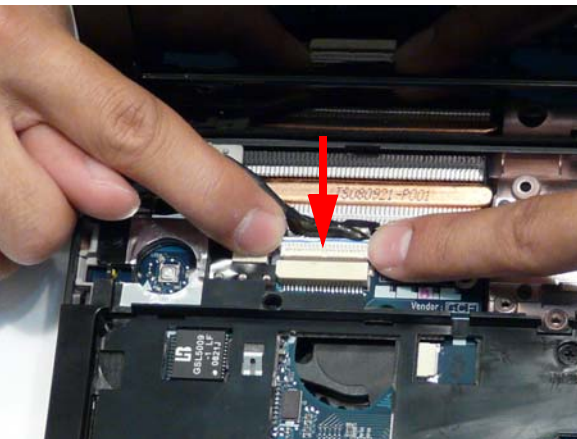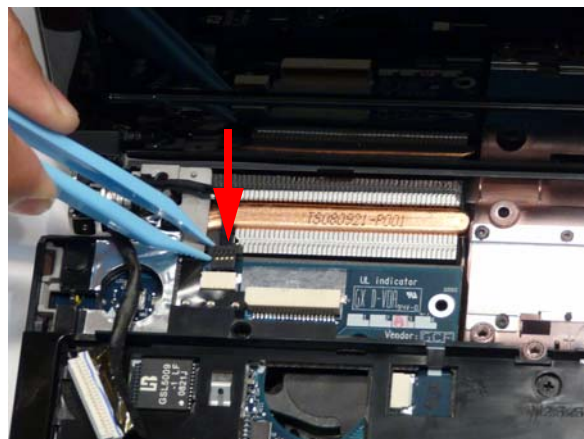

IMPORTANT: Run the cables as shown to avoid trapping when the Switch Cover is replaced.





6. Insert the Antenna cables through the casing, as shown, and pull through from the underside.

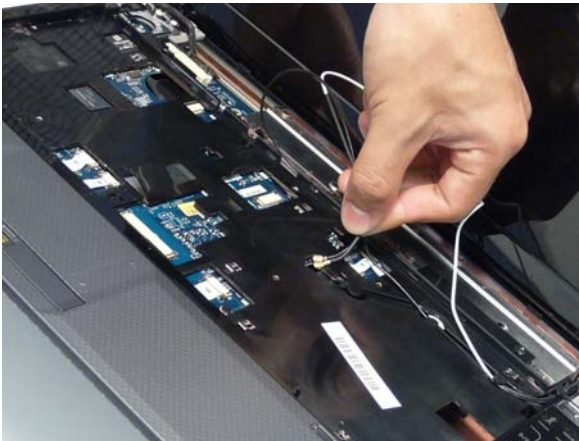


7. Ensure the cable is pulled completely through the casing.


8. Run the Antenna cables along the cable channel as shown, using all available cable clips.

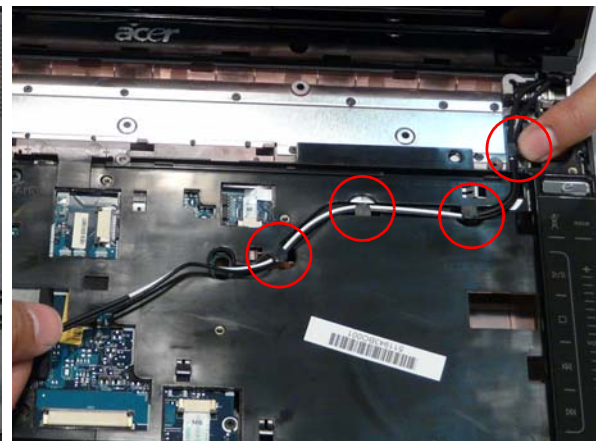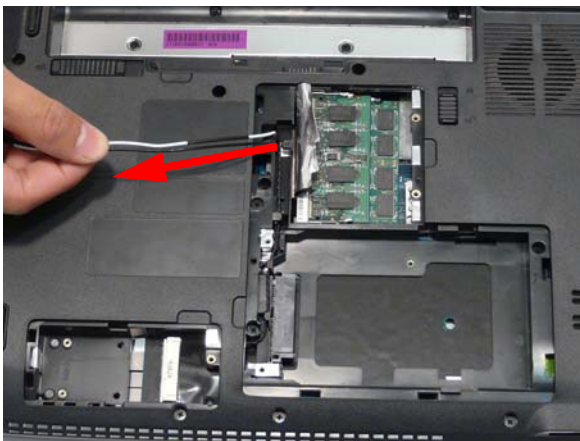


IMPORTANT: Run the cables as shown to avoid trapping when the Switch Cover is replaced.

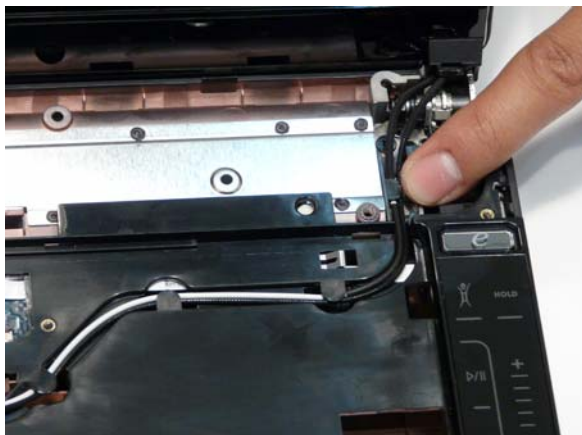


9. Replace the two adhesive strips to secure the cables in place.

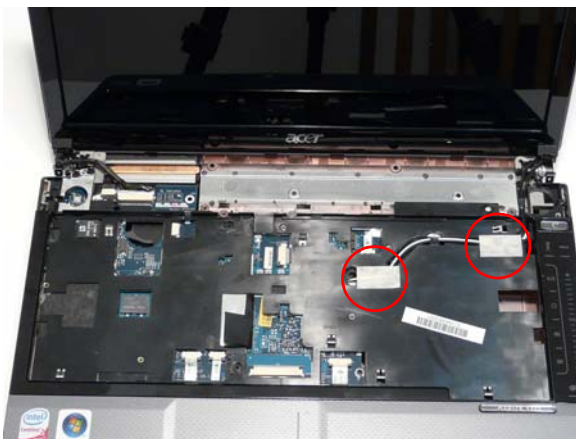


10. Pull the Antenna through the casing into the WLAN bay as shown.

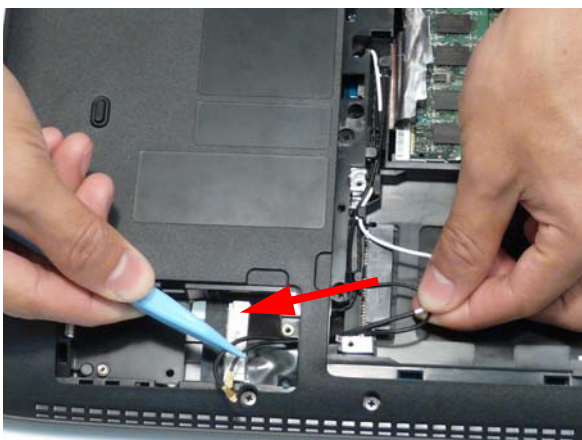

11. Run the Antenna cables along the cable channel as shown, using all the available cable clips.

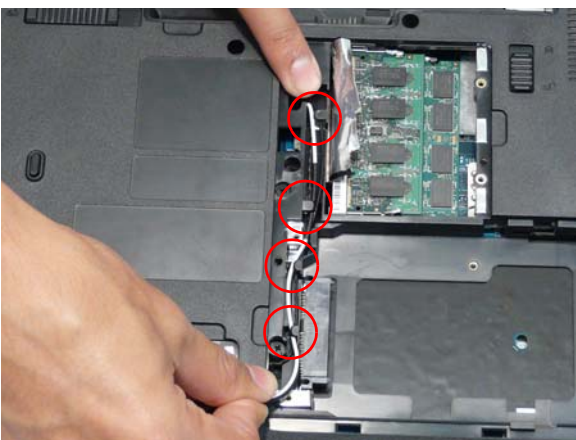

12. Replace the adhesive strip to secure the cables in place.

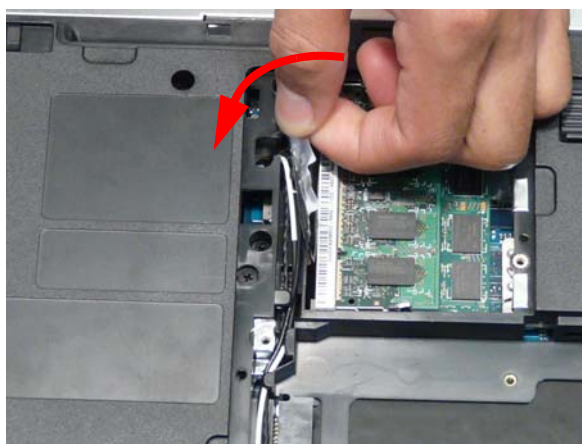



13. Replace the two securing screws.



Replacing the Speaker Module


1. Align and replace the Speaker Module in the lower case.

IMPORTANT: Run the LCD cables over the Speaker Module as shown to avoid trapping when the Switch Cover is replaced.

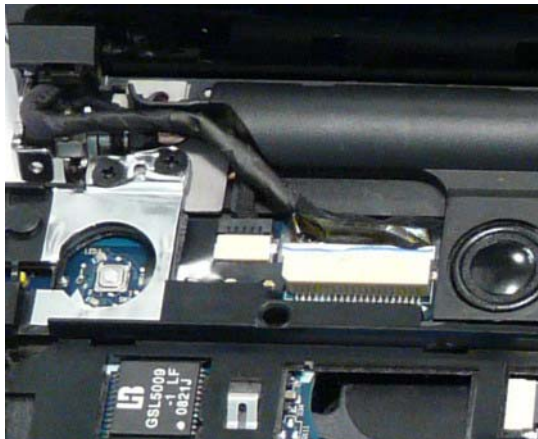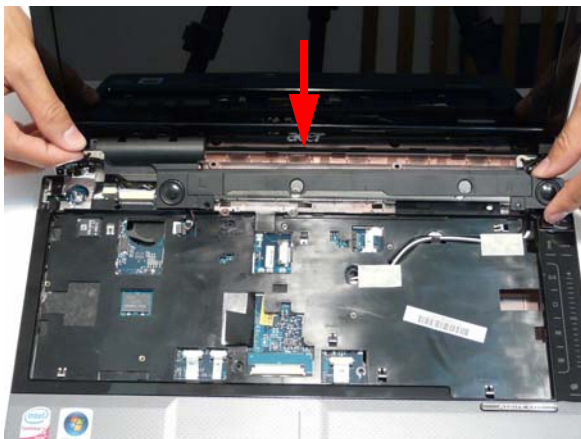


2. Reconnect the Speaker cable.

3. Replace the adhesive tape to secure the LCD cables in place.


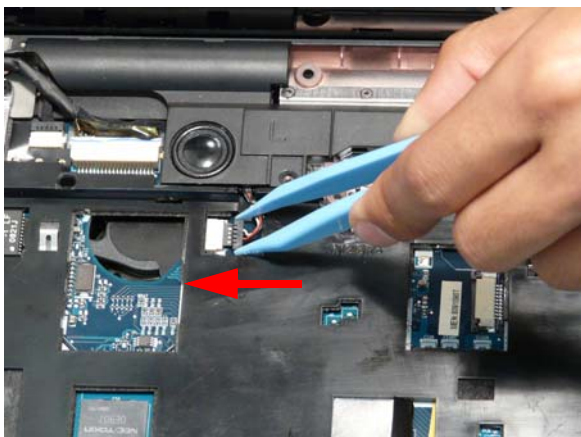


4. Replace the two securing screws as shown.


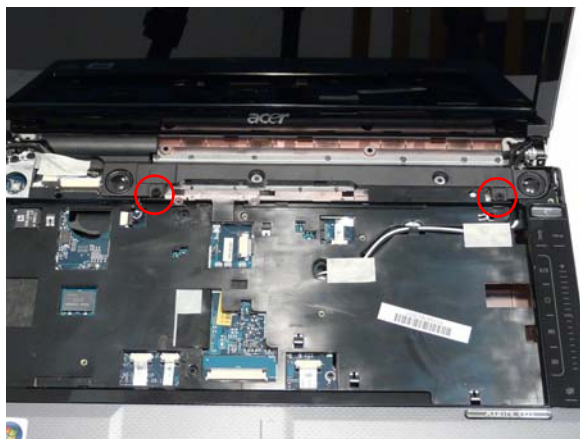


Replacing the Function Board

1. Insert the Function Board, rear edge first, into the casing.
2. Rotate the board downward and apply pressure, ensuring that the locating pins are correctly seated.

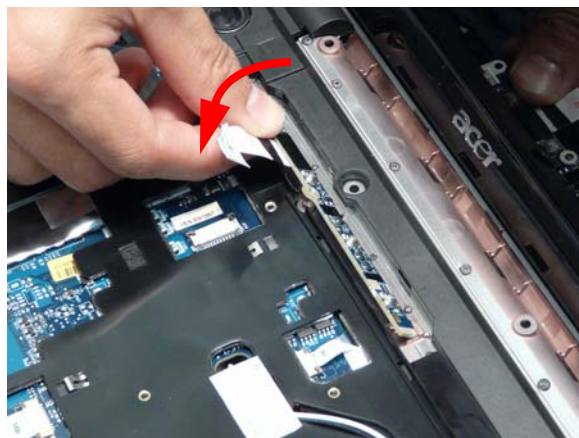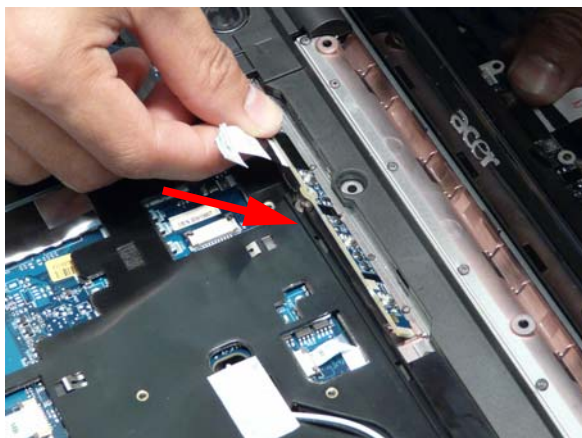


3. Reconnect the FFC cable and close the locking latch.
4. Replace the two securing screws.

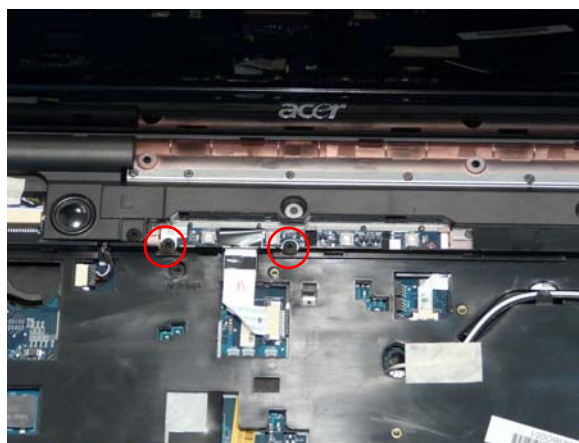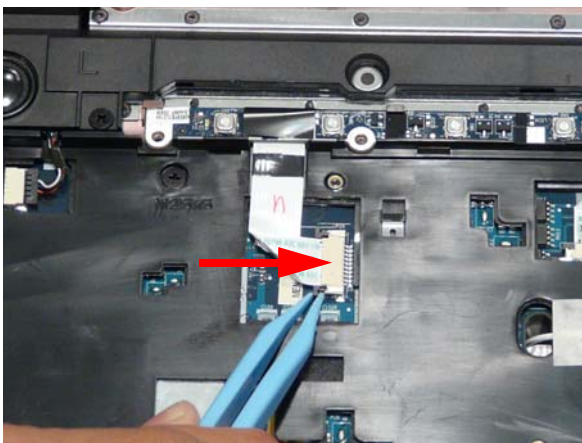

Replacing the Keyboard

1. Place the Keyboard on the Upper Cover, face up and reconnect the FFC cable to the Mainboard.
2. Insert the Keyboard, front edge first, into the Upper Cover as shown. Ensure that the five tabs are correctly seated.

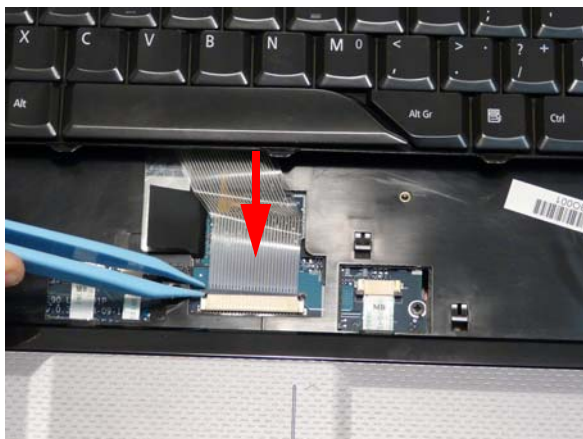

3. Press down both sides of the keyboard to locate it correctly.



Replacing the Switch Cover

1. Place the Switch Cover on the Upper Case as shown.
2. Press down both sides of the Switch Cover to snap it into place.



3. Continue to press down as shown to correctly seat the Switch Cover on the Upper Cover.



-
4. Turn the computer over and replace the six securing screws as shown.



Replacing the Hinge Covers

IMPORTANT: The left and right Hinge Covers are shaped differently and marked **L** and **R** on the inside. Ensure that the correct cover is used during reassembly.

1. Align the Hinge Covers screw hole side up and slide them on to the hinge assemblies.




2. Replace the two securing screws and caps.



Replacing the ODD Module

1. Align the ODD Bezel as shown and press it into place. Close the ODD drawer.

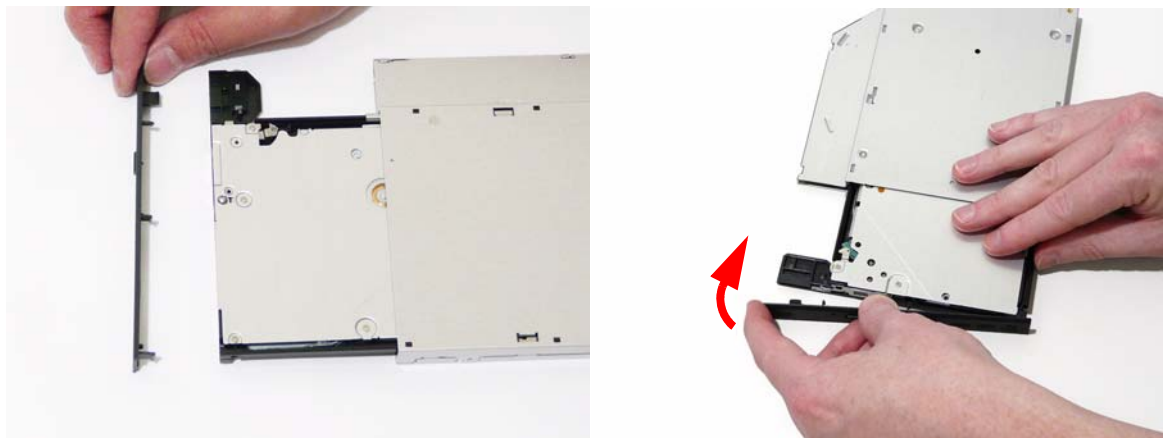

2. Align the ODD Bracket as shown and replace the securing screws.




3. Push the ODD Module into the chassis as shown until the bezel is flush with the casing.
4. Replace the securing screw.




Replacing the Hard Disk Drive Module



1. Place the HDD carrier on the HDD.

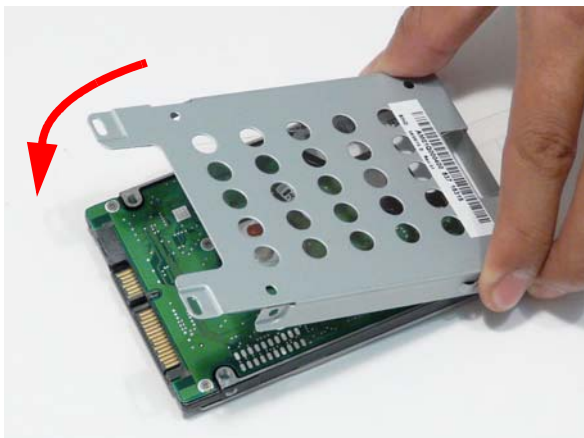

2. Replace the four securing screws (two each side).

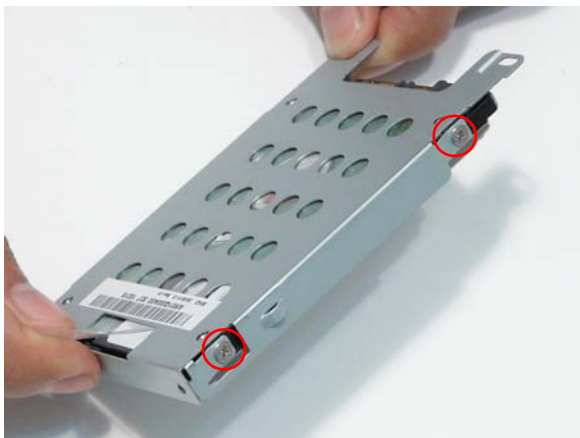


3. Place the HDD Module in the HDD bay as shown and slide it in the direction of the arrow to connect the interface.

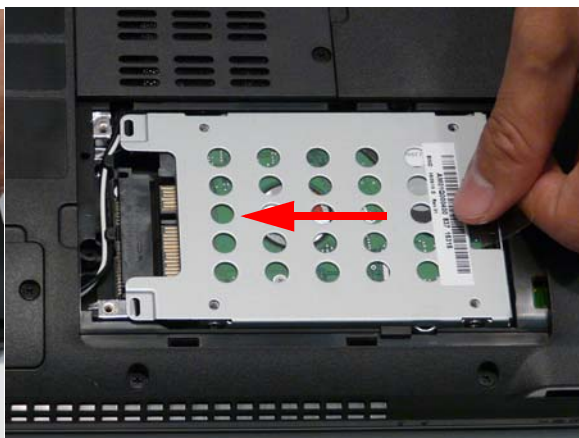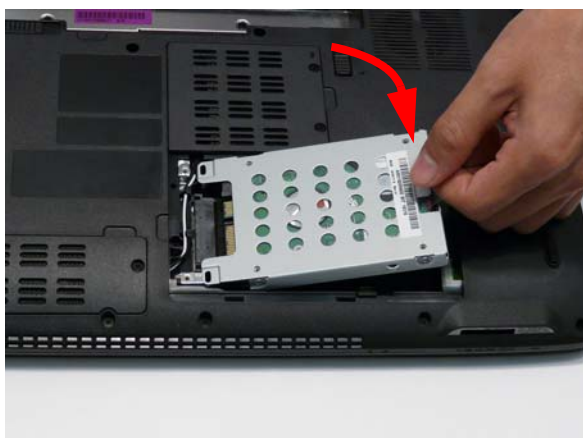

Replacing the DIMM Modules

NOTE: To replace DIMM Module 2, first remove DIMM Module 1. In this procedure, only DIMM Module 1 is shown.

1. Insert the DIMM Module flush with the connector and press down to lock in place.

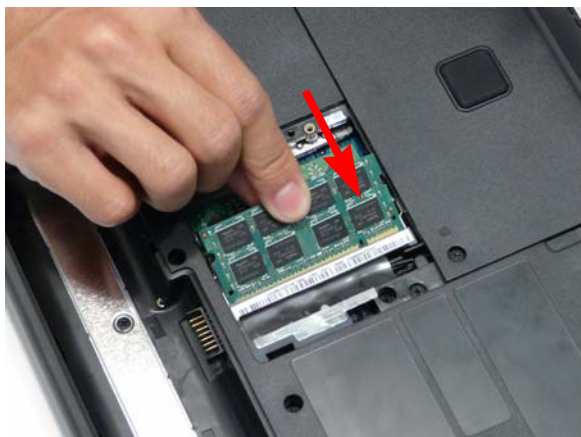

Replacing the WLAN Module

1. Insert the WLAN board into the WLAN socket.
2. Replace the two screws to secure the module.



3. Connect the two antenna cables to the module.
- NOTE:** The White cable goes to the upper terminal and the black cable to the lower terminal.

IMPORTANT: Ensure that the cabling is replaced as shown to avoid trapping when the covers are replaced.




Replacing the Lower Covers

1. Replace the Lower Covers and secure the captive screws.

DIMM
Cover

WLAN
Cover

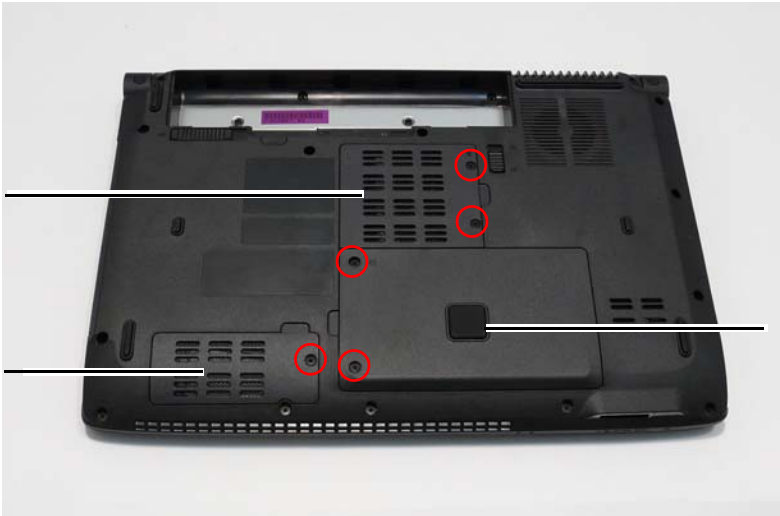

HDD
Cover


Replacing the ExpressCard and SD Card Dummy Trays

1. Insert the ExpressCard and push into the slot until flush with the chassis cover.
2. Insert the SD Card and push into the slot until flush with the chassis cover.



Replacing the Battery

1. Slide and hold the battery release latch to the release position (1), then insert the battery and press down (2).
2. Slide the battery lock/unlock latch to the lock position.

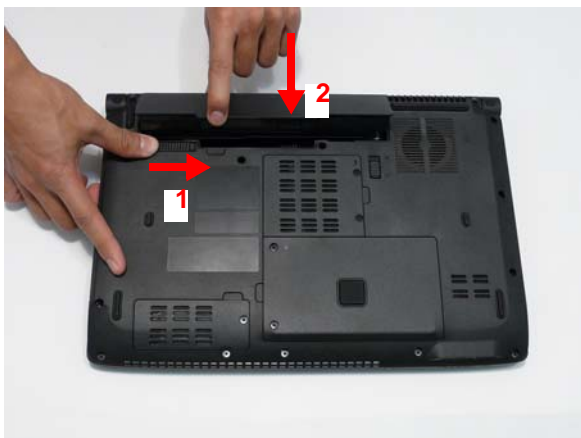

Troubleshooting

Common Problems

Use the following procedure as a guide for computer problems.

NOTE: The diagnostic tests are intended to test only Acer products. Non-Acer products, prototype cards, or modified options can give false errors and invalid system responses.


1. Obtain the failing symptoms in as much detail as possible.
2. Verify the symptoms by attempting to re-create the failure by running the diagnostic test or by repeating the same operation.
3. Use the following table with the verified symptom to determine which page to go to.

| Symptoms (Verified) | Go To |
|-----------------------------|----------|
| Power On Issue | Page 146 |
| No Display Issue | Page 147 |
| LCD Failure | Page 149 |
| Internal Keyboard Failure | Page 149 |
| Touchpad Failure | Page 150 |
| Internal Speaker Failure | Page 150 |
| Internal Microphone Failure | Page 152 |
| ODD Failure | Page 154 |
| Rightside USB Failure | Page 157 |
| Modem Failure | Page 157 |
| WLAN/WiMAX Failure | Page 158 |
| Bluetooth Failure | Page 158 |
| EasyTouch Button Failure | Page 159 |
| Media Board Failure | Page 159 |
| Finger Print Reader Failure | Page 160 |
| Thermal Unit Failure | Page 160 |
| Other Functions Failure | Page 161 |
| Intermittent Failures | Page 162 |
| Undetermined Failures | Page 162 |

4. If the Issue is still not resolved, see "Online Support Information" on page 229.

Power On Issue

If the system doesn't power on, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

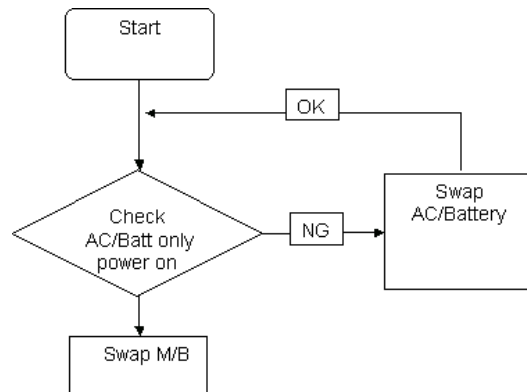


Computer Shutdown Intermittently

If the system powers off at intervals, perform the following actions one at a time to correct the problem.

1. Check the power cable is properly connected to the computer and the electrical outlet.
2. Remove any extension cables between the computer and the outlet.
3. Remove any surge protectors between the computer and the electrical outlet. Plug the computer directly into a known good electrical outlet.
4. Disconnect the power and open the casing to check the Thermal Unit and fan airways are free of obstructions.
5. Remove all external and non-essential hardware connected to the computer that are not necessary to boot the computer to the failure point.
6. Remove any recently installed software.
7. If the Issue is still not resolved, see "Online Support Information" on page 229.

No Display Issue

If the **Display** doesn't work, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

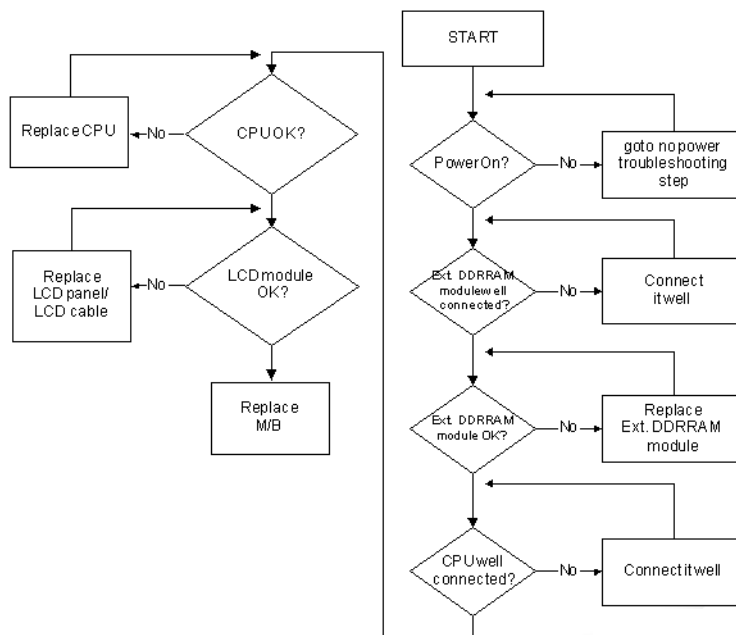

No POST or Video

If the POST or video doesn't display, perform the following actions one at a time to correct the problem.

1. Make sure that the internal display is selected. On this notebook model, switching between the internal display and the external display is done by pressing **Fn+F5**. Reference Product pages for specific model procedures.
2. Make sure the computer has power by checking at least one of the following occurs:
 - Fans start up
 - Status LEDs light up

If there is no power, see "Power On Issue" on page 146.

3. Drain any stored power by removing the power cable and battery and holding down the power button for 10 seconds. Reconnect the power and reboot the computer.
4. Connect an external monitor to the computer and switch between the internal display and the external display is by pressing **Fn+F5** (on this model).

If the POST or video appears on the external display, see "LCD Failure" on page 149.

5. Disconnect power and all external devices including port replicators or docking stations. Remove any memory cards and CD/DVD discs. Restart the computer.

If the computer boots correctly, add the devices one by one until the failure point is discovered.

6. Reseat the memory modules.
7. Remove the drives (see "Disassembly Process" on page 52).
8. If the Issue is still not resolved, see "Online Support Information" on page 229.

Abnormal Video Display

If video displays abnormally, perform the following actions one at a time to correct the problem.

1. Reboot the computer.
2. If permanent vertical/horizontal lines or dark spots display in the same location, the LCD is faulty and should be replaced. See “Disassembly Process” on page 52.
3. If extensive pixel damage is present (different colored spots in the same locations on the screen), the LCD is faulty and should be replaced. See “Disassembly Process” on page 52.
4. Adjust the brightness to its highest level. See the User Manual for instructions on adjusting settings.
NOTE: Ensure that the computer is not running on battery alone as this may reduce display brightness.
If the display is too dim at the highest brightness setting, the LCD is faulty and should be replaced. See “Disassembly Process” on page 52.
5. Check the display resolution is correctly configured:
 - a. Minimize or close all Windows.
 - b. If display size is only abnormal in an application, check the view settings and control/mouse wheel zoom feature in the application.
 - c. If desktop display resolution is not normal, right-click on the desktop and select **Personalize**→ **Display Settings**.
 - d. Click and drag the Resolution slider to the desired resolution.
 - e. Click **Apply** and check the display. Readjust if necessary.
6. Roll back the video driver to the previous version if updated.
7. Remove and reinstall the video driver.
8. Check the Device Manager to determine that:
 - The device is properly installed. There are no red Xs or yellow exclamation marks.
 - There are no device conflicts.
 - No hardware is listed under Other Devices.
9. If the Issue is still not resolved, see “Online Support Information” on page 229.
10. Run the Windows Memory Diagnostic from the operating system DVD and follow the onscreen prompts.
11. If the Issue is still not resolved, see “Online Support Information” on page 229.


Random Loss of BIOS Settings

If the computer is experiencing intermittent loss of BIOS information, perform the following actions one at a time to correct the problem.

1. If the computer is more than one year old, replace the CMOS battery.
2. Run a complete virus scan using up-to-date software to ensure the computer is virus free.
3. If the computer is experiencing HDD or ODD BIOS information loss, disconnect and reconnect the power and data cables between devices.
If the BIOS settings are still lost, replace the cables.
4. If HDD information is missing from the BIOS, the drive may be defective and should be replaced.
5. Replace the Motherboard.
6. If the Issue is still not resolved, see “Online Support Information” on page 229.


LCD Failure

If the **LCD** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

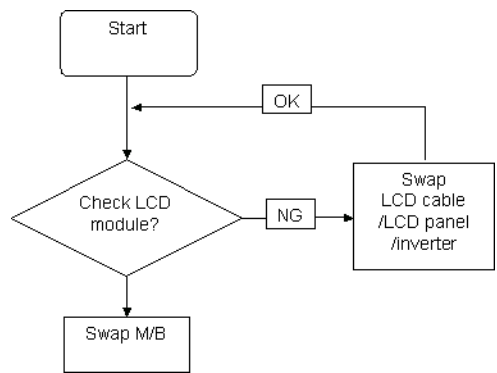


Built-In Keyboard Failure

If the built-in **Keyboard** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

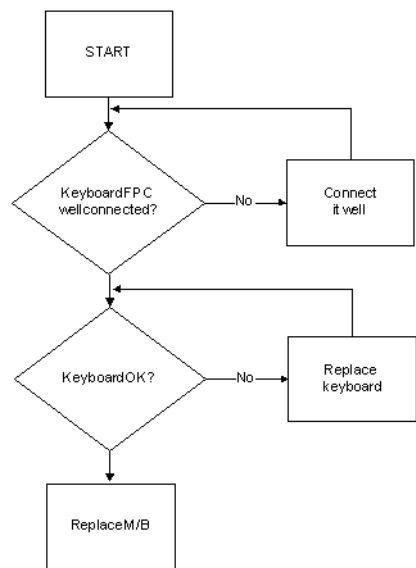


Touchpad Failure

If the **Touchpad** doesn't work, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

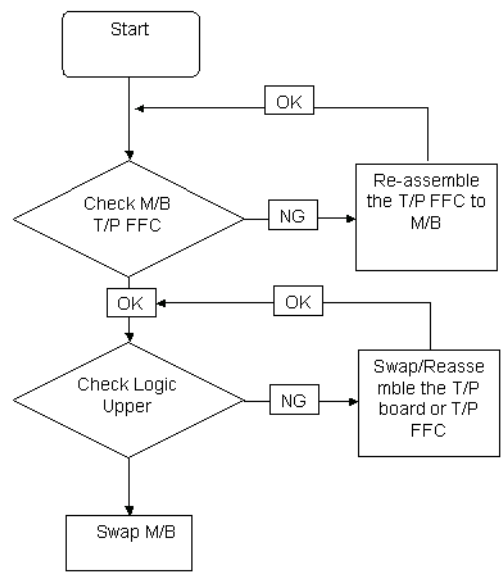

Internal Speaker Failure

If the internal **Speakers** fail, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

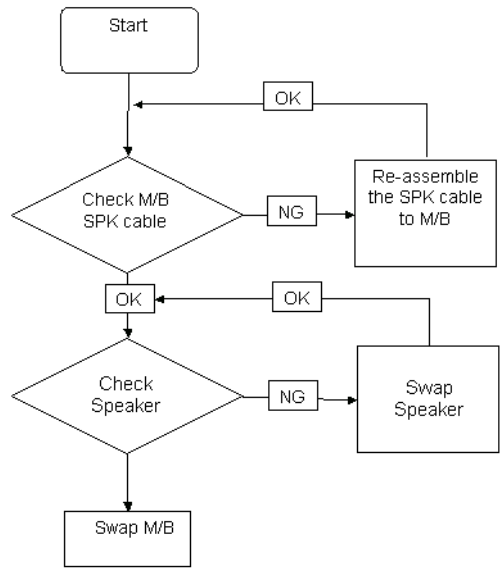

Sound Problems

If sound problems are experienced, perform the following actions one at a time to correct the problem.


1. Reboot the computer.
2. Navigate to **Start**→ **Control Panel**→ **System and Maintenance**→ **System**→ **Device Manager**. Check the Device Manager to determine that:
 - The device is properly installed.
 - There are no red Xs or yellow exclamation marks.
 - There are no device conflicts.
 - No hardware is listed under Other Devices.
3. Roll back the audio driver to the previous version, if updated recently.
4. Remove and reinstall the audio driver.
5. Ensure that all volume controls are set mid range:
 - a. Click the volume icon on the taskbar and drag the slider to 50. Ensure that the volume is not muted.
 - b. Click Mixer to verify that other audio applications are set to 50 and not muted.
6. Navigate to **Start**→ **Control Panel**→ **Hardware and Sound**→ **Sound**. Ensure that Speakers are selected as the default audio device (green check mark).

NOTE: If Speakers does not show, right-click on the **Playback** tab and select **Show Disabled Devices** (clear by default).
7. Select Speakers and click **Configure** to start **Speaker Setup**. Follow the onscreen prompts to configure the speakers.
8. Remove and recently installed hardware or software.
9. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.
10. Reinstall the Operating System.
11. If the Issue is still not resolved, see “Online Support Information” on page 229.

Internal Microphone Failure

If the internal **Microphone** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

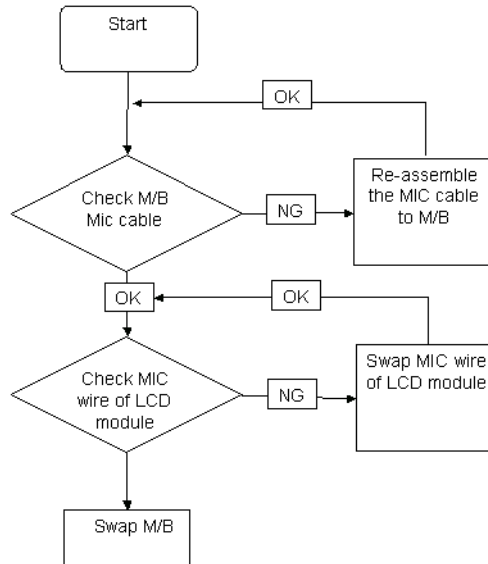

Microphone Problems

If internal or external **Microphones** do not operate correctly, perform the following actions one at a time to correct the problem.

1. Check that the microphone is enabled. Navigate to **Start**→ **Control Panel**→ **Hardware and Sound**→ **Sound** and select the **Recording** tab.
2. Right-click on the **Recording** tab and select **Show Disabled Devices** (clear by default).
3. The microphone appears on the **Recording** tab.
4. Right-click on the microphone and select **Enable**.
5. Select the microphone then click **Properties**. Select the **Levels** tab.
6. Increase the volume to the maximum setting and click **OK**.
7. Test the microphone hardware:
 - a. Select the microphone and click **Configure**.
 - b. Select **Set up microphone**.
 - c. Select the microphone type from the list and click **Next**.
 - d. Follow the onscreen prompts to complete the test.
8. If the Issue is still not resolved, see “Online Support Information” on page 229.

HDD Not Operating Correctly

If the **HDD** does not operate correctly, perform the following actions one at a time to correct the problem.

1. Disconnect all external devices.
2. Run a complete virus scan using up-to-date software to ensure the computer is virus free.
3. Run the Windows Vista Startup Repair Utility:
 - a. insert the Windows Vista Operating System DVD in the ODD and restart the computer.
 - b. When prompted, press any key to start to the operating system DVD.
 - c. The **Install Windows** screen displays. Click **Next**.
 - d. Select **Repair your computer**.
 - e. The **System Recovery Options** screen displays. Click **Next**.
 - f. Select the appropriate operating system, and click **Next**.

NOTE: Click **Load Drivers** if controller drives are required.

- g. Select **Startup Repair**.
- h. Startup Repair attempts to locate and resolve issues with the computer.
- i. When complete, click **Finish**.


If an issue is discovered, follow the onscreen information to resolve the problem.

4. Run the Windows Memory Diagnostic Tool. For more information see Windows Help and Support.
5. Restart the computer and press F2 to enter the BIOS Utility. Check the BIOS settings are correct and that CD/DVD drive is set as the first boot device on the Boot menu.
6. Ensure all cables and jumpers on the HDD and ODD are set correctly.
7. Remove any recently added hardware and associated software.
8. Run the Windows Disk Defragmenter. For more information see Windows Help and Support.
9. Run Windows Check Disk by entering **chkdsk /r** from a command prompt. For more information see Windows Help and Support.
10. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.
11. Replace the HDD. See "Disassembly Process" on page 52.

ODD Failure

If the **ODD** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

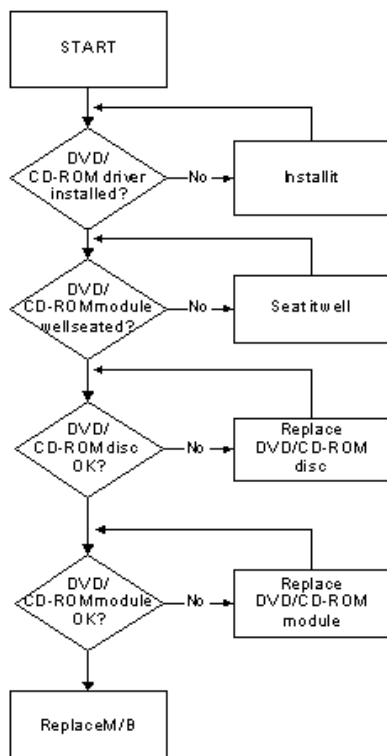

ODD Not Operating Correctly

If the **ODD** exhibits any of the following symptoms it may be faulty:

- Audio CDs do not play when loaded
- DVDs do not play when loaded
- Blank discs do not burn correctly
- DVD or CD play breaks up or jumps
- Optical drive not found or not active:
 - Not shown in My Computer or the BIOS setup
 - LED does not flash when the computer starts up
 - The tray does not eject
- Access failure screen displays
- The ODD is noisy

Perform the following general solutions one at a time to correct the problem.

1. Reboot the computer and retry the operation.
2. Try an alternate disc.
3. Navigate to **Start** → **Computer**. Check that the ODD device is displayed in the **Devices with Removable Storage** panel.
4. Navigate to **Start** → **Control Panel** → **System and Maintenance** → **System** → **Device Manager**.

-
- a. Double-click **IDE ATA/ATAPI controllers**. If a device displays a down arrow, right-click on the device and click **Enable**.
 - b. Double-click **DVD/CD-ROM drives**. If the device displays a down arrow, right-click on the device and click **Enable**.
 - c. Check that there are no yellow exclamation marks against the items in **IDE ATA/ATAPI controllers**. If a device has an exclamation mark, right-click on the device and uninstall and reinstall the driver.
 - d. Check that there are no yellow exclamation marks against the items in **DVD/CD-ROM drives**. If a device has an exclamation mark, right-click on the device and uninstall and reinstall the driver.
 - e. If the exclamation marker is not removed from the item in the lists, try removing any recently installed software and retrying the operation.

Discs Do Not Play

If discs do not play when inserted in the drive, perform the following actions one at a time to correct the problem.

1. Check that the disc is correctly seated in the drive tray and that the label on the disc is visible.
2. Check that the media is clean and scratch free.
3. Try an alternate disc in the drive.
4. Ensure that **AutoPlay** is enabled:
 - a. Navigate to **Start**→ **Control Panel**→ **Hardware and Sound**→ **AutoPlay**.
 - b. Select **Use AutoPlay for all media and devices**.
 - c. In the Audio CD and DVD Movie fields, select the desired player from the drop down menu.
5. Check that the Regional Code is correct for the selected media:

IMPORTANT:Region can only be changed a limited number of times. After Changes remaining reaches zero, the region cannot be changed even Windows is reinstalled or the drive is moved to another computer.

- a. Navigate to **Start**→ **Control Panel**→ **System and Maintenance**→ **System**→ **Device Manager**.
- b. Double-click **DVD/CD-ROM drives**.
- c. Right-click **DVD drive** and click **Properties**, then click the **DVD Region** tab.
- d. Select the region suitable for the media inserted in the drive.

Discs Do Not Burn Properly

If discs can not be burned, perform the following actions one at a time to correct the problem.

1. Ensure that the default drive is record enabled:
 - a. Navigate to **Start**→ **Computer** and right-click the writable ODD icon. Click **Properties**.
 - b. Select the **Recording** tab. In the **Desktop disc recording** panel, select the writable ODD from the drop down list.
 - c. Click **OK**.
2. Ensure that the software used for burning discs is the factory default. If using different software, refer to the software's user manual.

Playback is Choppy

If playback is choppy or jumps, perform the following actions one at a time to correct the problem.

1. Check that system resources are not running low:
 - a. Try closing some applications.
 - b. Reboot and try the operation again.
2. Check that the ODD controller transfer mode is set to DMA:
 - a. Navigate to **Start**→ **Control Panel**→ **System and Maintenance**→ **System**→ **Device Manager**.

-
- b. Double-click **IDE ATA/ATAPI controllers**, then right-click ATA Device 0.
 - c. Click **Properties** and select the **Advanced Settings** tab. Ensure that the **Enable DMA** box is checked and click **OK**.
 - d. Repeat for the other ATA Devices shown if applicable.

Drive Not Detected

If Windows cannot detect the drive, perform the following actions one at a time to correct the problem.

1. Restart the computer and press F2 to enter the BIOS Utility.
2. Check that the drive is detected in the **ATAPI Model Name** field on the Information page.
NOTE: Check that the entry is identical to one of the ODDs specified in “Hardware Specifications and Configurations” on page 18.
3. Turn off the power and remove the cover to inspect the connections to the ODD. See “Disassembly Process” on page 52.
 - a. Check for broken connectors on the drive, motherboard, and cables.
 - b. Check for bent or broken pins on the drive, motherboard, and cable connections.
 - c. Try an alternate cable, if available. If the drive works with the new cable, the original cable should be replaced.
4. Reseat the drive ensuring and all cables are connected correctly.
5. Replace the ODD. See “Disassembly Process” on page 52.

Drive Read Failure

If discs cannot be read when inserted in the drive, perform the following actions one at a time to correct the problem.


1. Remove and clean the failed disc.
2. Retry reading the CD or DVD.
 - d. Test the drive using other discs.
 - e. Play a DVD movie
 - f. Listen to a music CD

If the ODD works properly with alternate discs, the original disc is probably defective and should be replaced.

3. Turn off the power and remove the cover to inspect the connections to the ODD. See “Disassembly Process” on page 52.
 - a. Check for broken connectors on the drive, motherboard, and cables.
 - b. Check for bent or broken pins on the drive, motherboard, and cable connections.
 - c. Try an alternate cable, if available. If the drive works with the new cable, the original cable should be replaced.
4. Replace the ODD. See “Disassembly Process” on page 52.


USB Failure (Rightside)

If the rightside **USB** port fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

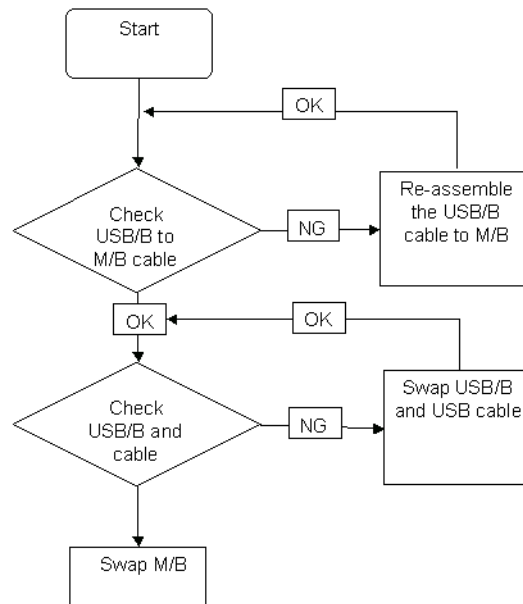


Modem Function Failure

If the internal **Modem** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

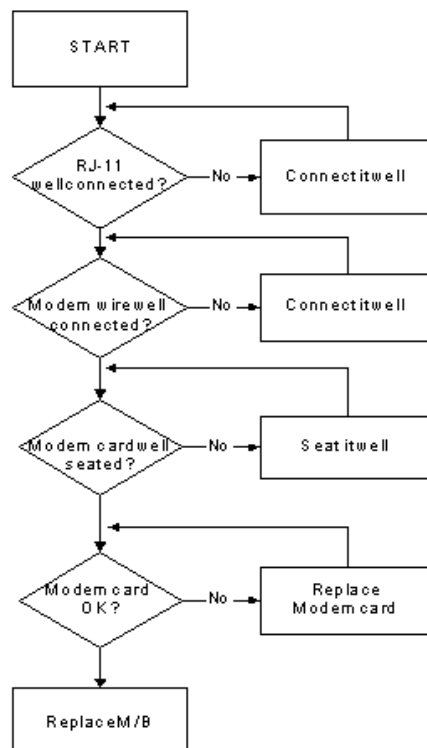


Wireless Function Failure

If the **WLAN/WiMAX** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

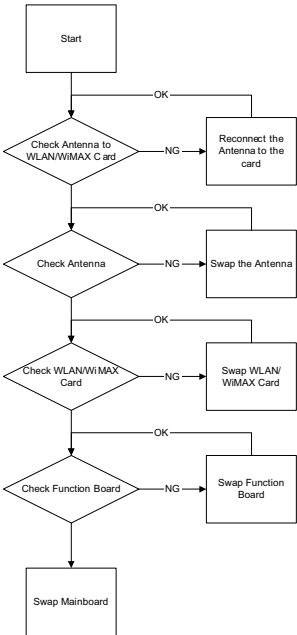


Bluetooth Function Failure

If the **Bluetooth** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

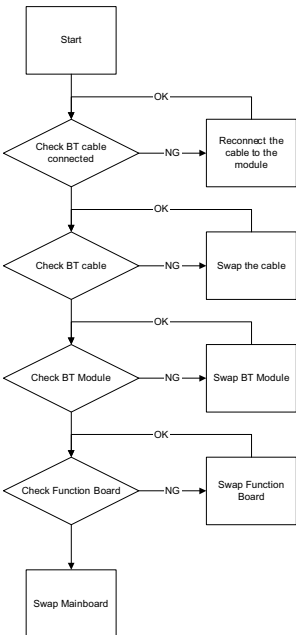


EasyTouch Button Failure

If the **Acer EasyTouch** buttons fail, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

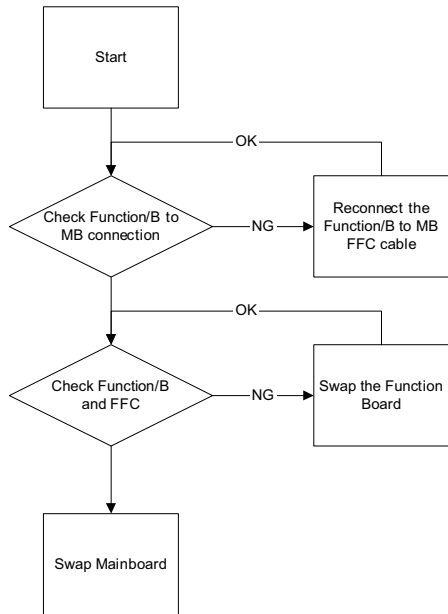


Media Board Failure

If the **Media Board** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

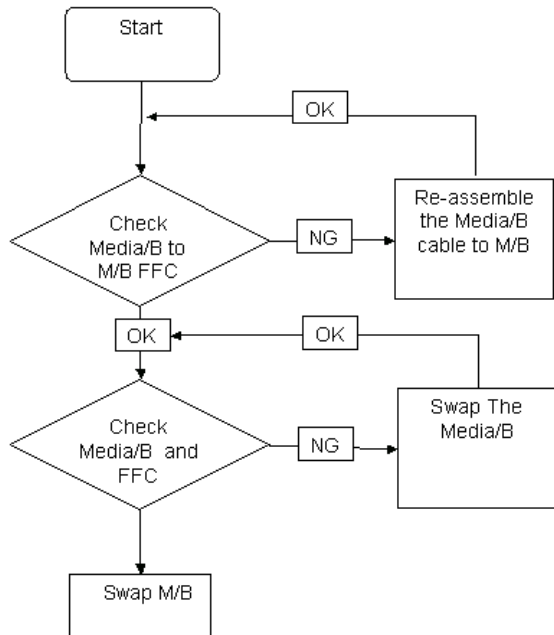


Fingerprint Reader Failure

If the **Fingerprint Reader** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

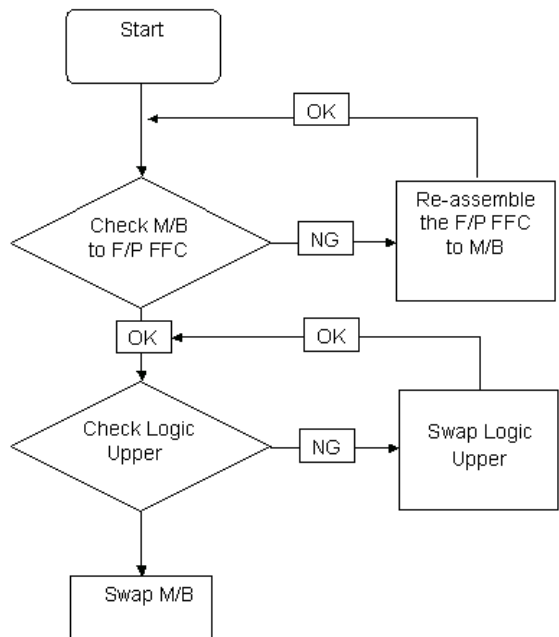

Thermal Unit Failure

If the **Thermal Unit** fails, perform the following actions one at a time to correct the problem. Do not replace a non-defective FRUs:

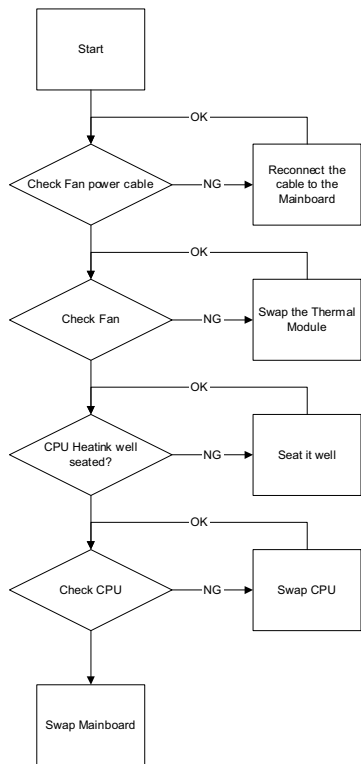

External Mouse Failure

If an external **Mouse** fails, perform the following actions one at a time to correct the problem.

1. Try an alternative mouse.
2. If the mouse uses a wireless connection, insert new batteries and confirm there is a good connection. See the mouse user manual.
3. If the mouse uses a USB connection, try an alternate USB port.
4. Try an alternative program to verify mouse operation. Reinstall the program experiencing mouse failure.
5. Restart the computer.
6. Remove any recently added hardware and associated software.
7. Remove any recently added software and reboot.
8. Restore system and file settings from a known good date using **System Restore**.

If the issue is not fixed, repeat the preceding steps and select an earlier time and date.

9. Run the Event Viewer to check the events log for errors. For more information see Windows Help and Support.
10. Roll back the mouse driver to the previous version if updated recently.
11. Remove and reinstall the mouse driver.
12. Check the Device Manager to determine that:
 - The device is properly installed. There are no red Xs or yellow exclamation marks.
 - There are no device conflicts.
 - No hardware is listed under Other Devices.
13. If the Issue is still not resolved, see "Online Support Information" on page 229.

Other Failures

If the CRT Switch, Dock, LAN Port, external MIC or Speakers, PCI Express Card, 5-in-1 Card Reader or Volume Wheel fail, perform the following general steps to correct the problem. Do not replace a non-defective FRUs:

1. Check Drive whether is OK.
2. Check Test Fixture is ok.
3. Swap M/B to Try.

Intermittent Problems

Intermittent system hang problems can be caused by a variety of reasons that have nothing to do with a hardware defect, such as: cosmic radiation, electrostatic discharge, or software errors. FRU replacement should be considered only when a recurring problem exists.

When analyzing an intermittent problem, do the following:

1. Run the advanced diagnostic test for the system board in loop mode at least 10 times.
2. If no error is detected, do not replace any FRU.
3. If any error is detected, replace the FRU. Rerun the test to verify that there are no more errors.

Undetermined Problems

The diagnostic problems does not identify which adapter or device failed, which installed devices are incorrect, whether a short circuit is suspected, or whether the system is inoperative.

Follow these procedures to isolate the failing FRU (do not isolate non-defective FRU).

NOTE: Verify that all attached devices are supported by the computer.

NOTE: Verify that the power supply being used at the time of the failure is operating correctly. (See “Power On Issue” on page 146.):

1. Power-off the computer.
2. Visually check them for damage. If any problems are found, replace the FRU.
3. Remove or disconnect all of the following devices:
 - Non-Acer devices
 - Printer, mouse, and other external devices
 - Battery pack
 - Hard disk drive
 - DIMM
 - CD-ROM/Diskette drive Module
 - PC Cards
4. Power-on the computer.
5. Determine if the problem has changed.
6. If the problem does not recur, reconnect the removed devices one at a time until you find the failing FRU.
7. If the problem remains, replace the following FRU one at a time. Do not replace a non-defective FRU:
 - System board
 - LCD assembly

POST Codes Tables

These tables describe the POST codes and descriptions during the POST.

Sec:

NO_EVICTION_MODE_DEBUG EQU 1 (CommonPlatform\sec\la32\SecCore.inc)

| Code | Description |
|------|--|
| 0xC2 | MTRR setup |
| 0xC3 | Enable cache |
| 0xC4 | Establish cache tags |
| 0xC5 | Enter NEM, Place the BSP in No Fill mode, set CR0.CD = 1, CR0.NW = 0 |
| 0xCF | Cache Init Finished |

Memory:

DEBUG_BIOS equ 1 (Chipset\Alviso\MemoryInitAsm\IA32\IMEMORY.INC)

| Code | Description |
|------|--|
| 0xA0 | First memory check point |
| 0x01 | Enable MCHBAR |
| 0x02 | Check for DRAM initialization interrupt and reset fail |
| 0x03 | Verify all DIMMs are DDR or DDR2 and unbuffered |
| 0x04 | Detect an improper warm reset and handle |
| 0x05 | Detect if ECC SO-DIMMs are present in the system |
| 0x06 | Verify all DIMMs are single or double sided and not asymmetric |
| 0x07 | Verify all DIMMs are x8 or x16 width |
| 0x08 | Find a common CAS latency between the DIMMS and the MCH |
| 0x09 | Determine the memory frequency and CAS latency to program |
| 0x10 | Determine the smallest common TRAS for all DIMMs |
| 0x11 | Determine the smallest common TRP for all DIMMs |
| 0x12 | Determine the smallest common TRCD for all DIMMs |
| 0x13 | Determine the smallest refresh period for all DIMMs |
| 0x14 | Verify burst length of 8 is supported by all DIMMs |
| 0x15 | Determine the smallest tWR supported by all DIMMs |
| 0x16 | Determine DIMM size parameters |
| 0x17 | Program the correct system memory frequency |
| 0x18 | Determine and set the mode of operation for the memory channels |
| 0x19 | Program clock crossing registers |
| 0x20 | Disable Fast Dispatch |
| 0x21 | Program the DRAM Row Attributes and DRAM Row Boundary registers |
| 0x22 | Program the DRAM Bank Architecture register |
| 0x23 | Program the DRAM Timing & and DRAM Control registers |
| 0x24 | Program ODT |
| 0x25 | Perform steps required before memory init |
| 0x26 | Program the receive enable reference timing control register Program the DLL Timing Control Registers, RCOMP settings |

| Code | Description |
|------|---|
| 0x27 | Enable DRAM Channel I/O Buffers |
| 0x28 | Enable all clocks on populated rows |
| 0x29 | Perform JEDEC memory initialization for all memory rows |
| 0x30 | Perform steps required after memory init |
| 0x31 | Program DRAM throttling and throttling event registers |
| 0x32 | Setup DRAM control register for normal operation and enable |
| 0x33 | Enable RCOMP |
| 0x34 | Clear DRAM initialization bit in the SB |
| 0x35 | Initialization Sequence Completed, program graphic clocks |
| 0x43 | Program Thermal Throttling |

BDS & Specific action:

| Code | Description |
|------|--|
| 0x00 | Report the legacy boot is happening |
| 0x12 | Wake up the Aps |
| 0x13 | Initialize SMM Private Data and relocate BSP SMBASE |
| 0x21 | PC init begin at the stage1 |
| 0x27 | Report every memory range do the hard ware ECC init |
| 0x28 | Report status code of every memory range |
| 0x50 | Get the root bridge handle |
| 0x51 | Notify pci bus driver starts to program the resource |
| 0x58 | Reset the host controller |
| 0x5A | IdeBus begin initialization |
| 0x79 | Report that the remote terminal is being disabled |
| 0x7A | Report that the remote terminal is being enabled |
| 0x90 | Keyboard reset |
| 0x91 | USB Keyboard disable |
| 0x92 | Keyboard detection |
| 0x93 | Report that the usb keyboard is being enabled |
| 0x94 | Clear the keyboard buffer |
| 0x95 | Init Keyboard |
| 0x98 | Mouse reset |
| 0x99 | Mouse disable |
| 0x9A | Detect PS2 mouse |
| 0x9B | Report that the mouse is being enabled |
| 0xB8 | Peripheral removable media reset (ex: IsaFloppy, USB device) |
| 0xB9 | Peripheral removable media disable |
| 0xBB | Peripheral removable media enable |
| 0xE4 | Report Status Code here for DXE_ENTRY_POINT once it is available |
| 0xF8 | Report that ExitBootServices() has been called |
| 0xF9 | Runtime driver set virtual address map |

Each PEIM entry point used in 80_PORT

| Code | Description |
|-----------|---------------------------|
| 0x00 | |
| 0x01 | PEI_EVENT_LOG |
| 0xA1 | PEI_OEM_SERVICE |
| 0xA2 | PEI_SIO_INIT |
| 0xA3 | PEI_MONO_STATUS_CODE |
| 0xA4 | PEI_CPU_IO_PCI_CFG |
| 0x06 | PEI_CPU_IO |
| 0x07 | PEI_PCI_CFG |
| 0xA5 | PEI_CPU_PEIM |
| 0xA6 | PEI_PLATFORM_STAGE1 |
| 0xA7 | PEI_VARIABLE |
| 0xA8 | PEI_SB_INIT |
| 0x0C | PEI_CAPSULE |
| 0xAA | PEI_PLATFORM_STAGE2 |
| 0xAC | PEI_SB_SMBUS_ARP_DISABLED |
| 0x0F | PEI_HOST_TO_SYSTEM |
| 0x40 | PEI_MEMORY_INIT |
| 0x41 | PEI_S3_RESUME |
| 0xAD | PEI_CLOCK_GEN |
| 0xAB | PEI_OP_PRESENCE |
| 0xAE | PEI_FIND_FV |
| 0x16 | PEI_H2O_DEBUG_IO |
| 0x17 | PEI_H2O_DEBUG_COMM |
| 0x16~0x1F | PEI_RESERVED |
| 0x20~0x2E | PEI_OEM_DEFINED |
| 0xAF | PEI_DXE_IPL |

Each Driver entry point used in 80_PORT

| Code | Description |
|------|---------------------------|
| 0x30 | RESERVED |
| 0xB6 | DXE_CRC32_SECTION_EXTRACT |
| 0xB8 | SCRIPT_SAVE |
| 0xB9 | ACPI_S3_SAVE |
| 0xBA | SMART_TIMER |
| 0xBB | JPEG_DECODER |
| 0xBC | PCX_DECODER |
| 0xBE | HT_CPU / MP_CPU |
| 0xBF | LEGACY_METRONOME |
| 0xC0 | FTWLITE |
| 0xC1 | RUN_RIME |
| 0xC2 | MONOTONIC_COUNTER |
| 0xC3 | WATCH_DOG_TIMER |

| Code | Description |
|------|-------------------------------------|
| 0xC4 | SECURITY_STUB |
| 0xC5 | DXE_CPU_IO |
| 0xC6 | CF9_RESET |
| 0xC7 | PC_RTC |
| 0xC8 | STATUS_CODE |
| 0xC9 | VARIABLE EMU_VARIABLE |
| 0xD9 | DXE_CHIPSET_INIT |
| 0x45 | DXE_ALERT_FORMAT |
| 0xD6 | PCI_HOST_BRIDGE |
| 0xD7 | PCI_EXPRESS |
| 0xD5 | DXE_SB_INIT |
| 0xDA | IDE_CONTROLLER |
| 0xDB | SATA_CONTROLLER |
| 0xDD | SB_SM_BUS |
| 0xE7 | ISA_ACPI_DRIVER |
| 0xE8 | ISA_BUS |
| 0xE9 | ISA_SERIAL |
| 0xED | BUS_PCI_UNDI |
| 0xEC | PCI_BUS |
| 0xF6 | BOOT_PRIORITY |
| 0xF7 | FVB_SERVICE |
| 0xF8 | ACPI_PLATFORM |
| 0xFB | PCI_HOT_PLUG |
| 0xFC | DXE_PLATFORM |
| 0xFD | PLATFORM_IDE |
| 0x97 | SMBIOS |
| 0x98 | MEMORY_SUB_CLASS |
| 0x99 | MISC_SUB_CLASS |
| 0x82 | CON_PLATFORM |
| 0x83 | SAVE_MEMORY_CONFIG |
| 0x84 | ACPI_SUPPORT |
| 0x85 | CON_SPLITTER_UGA_VGA / CON_SPLITTER |
| 0x88 | VGA_CLASS |
| 0x89 | DATA_HUB |
| 0x60 | DISK_IO |
| 0x8B | MEMORY_TEST |
| 0x62 | CRISIS_RECOVERY |
| 0x8D | LEGACY_8259 |
| 0x8E | LEGACY_REGION |
| 0x8F | LEGACY_INTERRUPT |
| 0x70 | BIOS_KEYBOARD |
| 0x71 | BIOS_VEDIO |


| Code | Description |
|------|--------------------------------------|
| 0x72 | MONITER_KEY |
| 0x73 | LEGACY_BIOS |
| 0x75 | LEGACY_BIOS_PLATFORM |
| 0x76 | PCI_PLATFORM |
| 0x6C | ISA_FLOOPY |
| 0x6D | PS2_MOUSE |
| 0x6E | USB_BOT |
| 0x6F | USB_CBI0 |
| 0x74 | USB_MOUSE |
| 0xFA | SETUP_UTILITY |
| 0x90 | FW_BLOCK_SERVICE |
| 0x78 | SMM_USB_LEGACY |
| 0x86 | GRAPHICS_CONSOLE |
| 0x87 | TERMINAL |
| 0x8A | DATA_HUB_STD_ERR |
| 0x7C | FAT |
| 0x7D | PARTITION |
| 0x7E | ENGLISH |
| 0x7F | FRENCH |
| 0x9E | HII_DATABASE |
| 0x9F | OEM_SETUP_BROWSER |
| 0x8C | OEM_BADGING_SUPPORT |
| 0xF9 | SETUP_MOUSE |
| 0x72 | MONITOR_KEY |
| 0xBD | PLATFORM_BDS |
| 0x8D | RESERVED |
| 0x8E | RESERVED |
| 0x8F | RESERVED |
| 0xA0 | DXE_H2O_DEBUG_IO |
| 0xB3 | DXE_TPM_TCG |
| 0xB4 | DXE_TPM_PHYSICAL_PRESENCE |
| 0xB7 | DXE_OEM_SERVICE |
| 0x9B | DXE_SECURITY_HDD_PASSWORD_SERVICE |
| 0xA9 | DXE_LAN_IDER_CONTROLLER |
| 0x9C | DXE_SECURITY_SYSTEM_PASSWORD_SERVICE |
| 0x9D | DXE_SECURITY_PASSWORD_CONSOLE |
| 0xCB | DXE_DATA_HUB_RECORD_POLICY |
| 0xB5 | DXE_TPM_DRIVER |
| 0x11 | CHINESE |
| 0xB0 | JAPANESE |
| 0xB1 | DXE_UNICODE_COLLATION |

Each SmmDriver entry point used in 80_PORT


| Code | Description |
|------|----------------------|
| 0xD4 | SMM_ACCESS |
| 0xDE | SMM_CONTROL |
| 0xCC | SMM_BASE |
| 0xD2 | SMM_RUNTIME |
| 0xDF | SB_SMM_DISPATCH |
| 0xD0 | SMM_THUNK |
| 0xCA | SMM_ACPI_SW_CHILD |
| 0xFE | SMM_PLATFORM |
| 0xD8 | SMM_GMCH_MBI |
| 0x90 | SMM_FW_BLOCK_SERVICE |
| 0x91 | SMM_VARIABLE |
| 0x92 | SMM_IHISI |
| 0x93 | SMM_INT15_MICROCODE |
| 0x94 | SMM_PNP |
| 0x95 | SMM_INIT_PPM |
| 0xD3 | SMM_OEM_SERVICE |

Jumper and Connector Locations

Top View

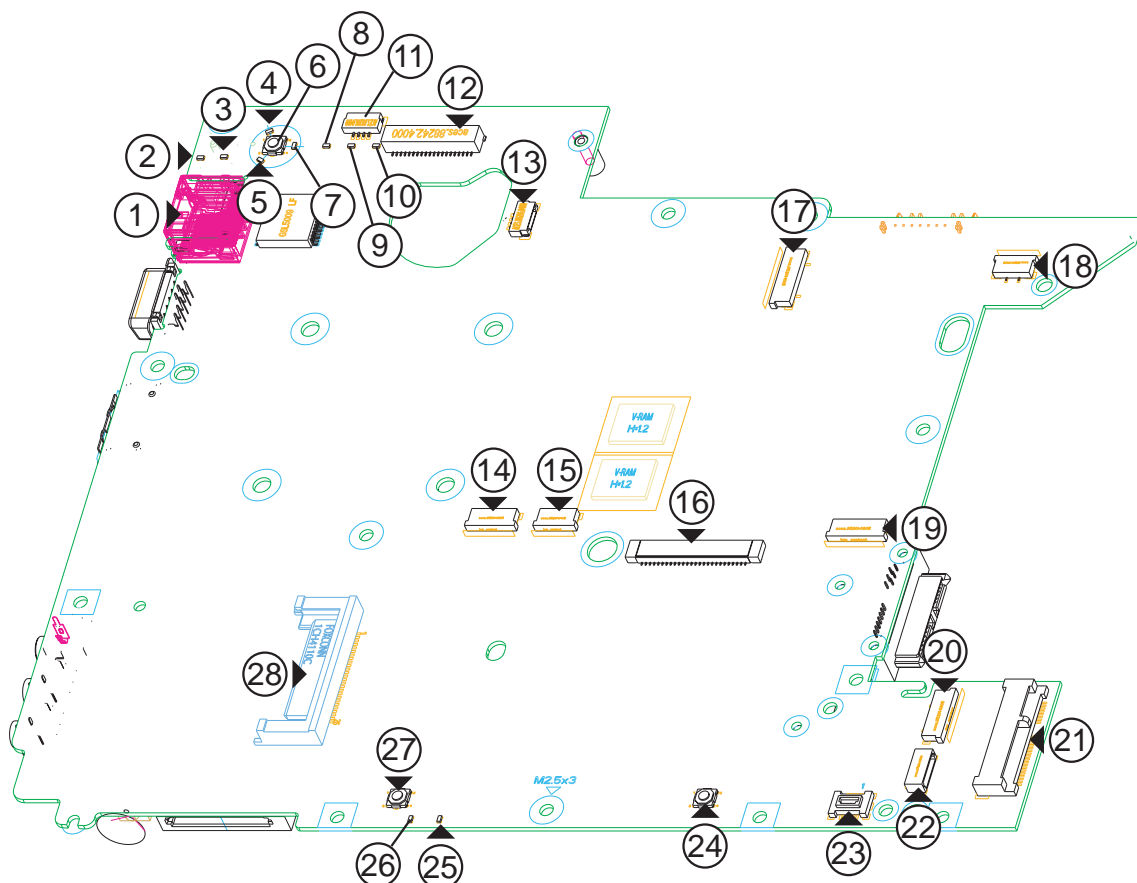

| Item | Pin | Description | Item | Pin | Description |
|------|--------|--------------------|------|--------|--------------------------|
| 1 | JPJ1 | RJ-45 Connector | 15 | JP16 | FP Board Connector |
| 2 | LED5 | AC-IN LED | 16 | JP23 | Keyboard Connector |
| 3 | LED10 | AC-IN-LED | 17 | JP26 | Function Board Connector |
| 4 | LED3 | ON-OFF LED | 18 | JP25 | e-Key Board Connector |
| 5 | LED4 | ON-OFF LED | 19 | JP22 | Media Console Connector |
| 6 | SW3 | Switch | 20 | JP15 | USB Board Connector |
| 7 | LED6 | ON-OFF LED | 21 | JMINI1 | MiniCard Port |
| 8 | LED7 | Media LED | 22 | JP18 | Bluetooth Connector |
| 9 | LED8 | Num LED | 23 | JMDC1 | MDC Connector |
| 10 | LED9 | Caps LED | 24 | SW2 | Switch |
| 11 | JP13 | MIC Connector | 25 | LED2 | Battery LED |
| 12 | JLVDS1 | LVDS Connector | 26 | LED1 | Power LED |
| 13 | JP14 | Speaker Connector | 27 | SW1 | Switch |
| 14 | JP21 | TP Board Connector | 28 | JEXP1 | ExpressCard Connector |

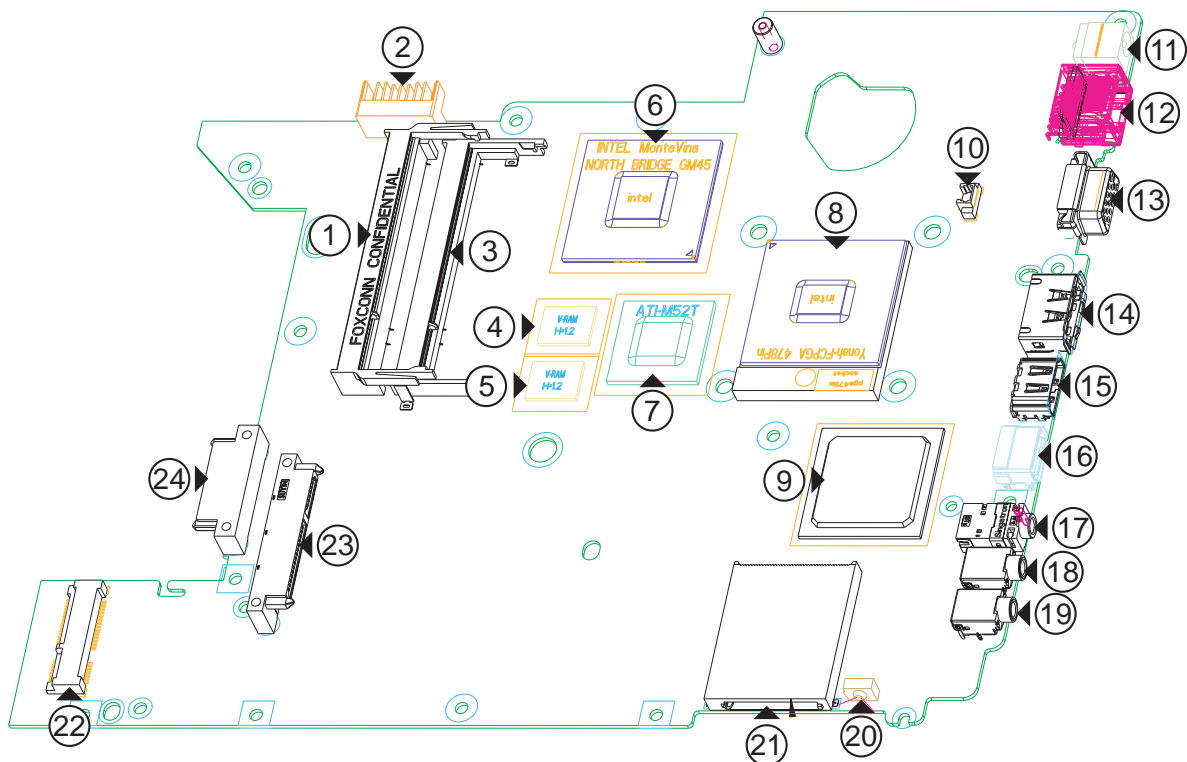

| Item | Pin | Description | Item | Pin | Description |
|------|--------|-------------------|------|--------|-----------------|
| 1 | JDIMM2 | DDR2 Socket | 13 | JCRT1 | D-Sub Connector |
| 2 | PJP2 | Battery Connector | 14 | JP17 | eSATA/USB Port |
| 3 | JDIMM1 | DDR2 Socket | 15 | JHDMI1 | HDMI Port |
| 4 | U11 | VRAM Chip | 16 | JUSB1 | USB Port |
| 5 | U9 | VRAM Chip | 17 | JHP1 | Headphone Jack |
| 6 | U2 | Northbridge | 18 | JMIC1 | Microphone Jack |
| 7 | U17 | VGA NB9M | 19 | JLINE1 | Audio-in Jack |
| 8 | JCPU1 | CPU Socket | 20 | IR1 | Infrared Sensor |
| 9 | U23 | Southbridge | 21 | JREAD1 | Card Reader |
| 10 | JP27 | Fan Connector | 22 | JMINI2 | MiniCard Socket |
| 11 | PJP3 | DC-IN Connector | 23 | JSATA1 | HDD Connector |
| 12 | JPJ1 | RJ-45 Connector | 24 | JSATA2 | ODD Connector |

Clearing Password Check and BIOS Recovery

This section provide you the standard operating procedures of clearing password and BIOS recovery for Aspire 4935/4935G. Aspire 4935/4935G provides one Hardware Open Gap on main board for clearing password check, and one Hotkey for enabling BIOS Recovery.

Clearing Password Check

Hardware Open Gap Description

| Item | Description | Location |
|-------|-------------------|------------|
| R1290 | Clear CMOS Jumper | Memory bay |



Steps for Clearing BIOS Password Check

If users set BIOS Password (Supervisor Password and/or User Password) for a security reason, BIOS will ask the password during systems POST or when systems enter to BIOS Setup menu. However, once it is necessary to bypass the password check, users need to short the HW Gap to clear the password by the following steps:

- Power Off a system, and remove HDD, AC and Battery from the machine.
- Open the back cover of the machine, and find out the HW Gap on M/B as picture.
- Use an electric conductivity tool to short the two points of the HW Gap.
- Plug in AC, keep the short condition on the HW Gap, and press Power Button to power on the system till BIOS POST finish. Then remove the tool from the HW Gap.
- Restart system. Press F2 key to enter BIOS Setup menu.
- If there is no Password request, BIOS Password is cleared. Otherwise, please follow the steps and try again.

NOTE: The steps are only for clearing BIOS Password (Supervisor Password and User Password).

BIOS Recovery by Crisis Disk

BIOS Recovery Boot Block:

BIOS Recovery Boot Block is a special block of BIOS. It is used to boot up the system with minimum BIOS initialization. Users can enable this feature to restore the BIOS firmware to a successful one once the previous BIOS flashing process failed.

BIOS Recovery Hotkey:

The system provides a function hotkey: **Fn+Esc**, for enable BIOS Recovery process when system is powered on during BIOS POST. To use this function, it is strongly recommended to have the AC adapter and Battery present. If this function is enabled, the system will force the BIOS to enter a special BIOS block, called Boot Block.

Steps for BIOS Recovery by Crisis Disk:

Before doing this, one Crisis Disk should be prepared ready in hand. The Crisis Disk could be made by executing the Crisis Disk program in another system with Windows XP OS.

Follow the steps below:

1. Power Off failed system.
2. Attach a USB floppy drive to the failed system.
3. Insert the Crisis Disk in to the USB floppy drive attached to the BIOS flash failed system.
4. In the power-off state, press and hold **Fn+Esc** then press the Power button.

The system powers on and the Crisis BIOS Recovery process begins.

BIOS Boot Block begins restoring the BIOS code from the Crisis floppy disk to BIOS ROM on the failed systems.

When the Crisis flash process is finished, the system restarts with a workable BIOS.

5. Update to the latest version BIOS for the system using the regular BIOS flashing process.

FRU (Field Replaceable Unit) List


This chapter gives you the FRU (Field Replaceable Unit) listing in global configurations of Aspire 4935/4935G. Refer to this chapter whenever ordering for parts to repair or for RMA (Return Merchandise Authorization).

Please note that WHEN ORDERING FRU PARTS, you should check the most up-to-date information available on your regional web or channel. For whatever reasons a part number change is made, it will not be noted on the printed Service Guide. For ACER AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code from those given in the FRU list of this printed Service Guide. You MUST use the local FRU list provided by your regional Acer office to order FRU parts for repair and service of customer machines.

NOTE: To scrap or to return the defective parts, you should follow the local government ordinance or regulations on how to dispose it properly, or follow the rules set by your regional Acer office on how to return it.





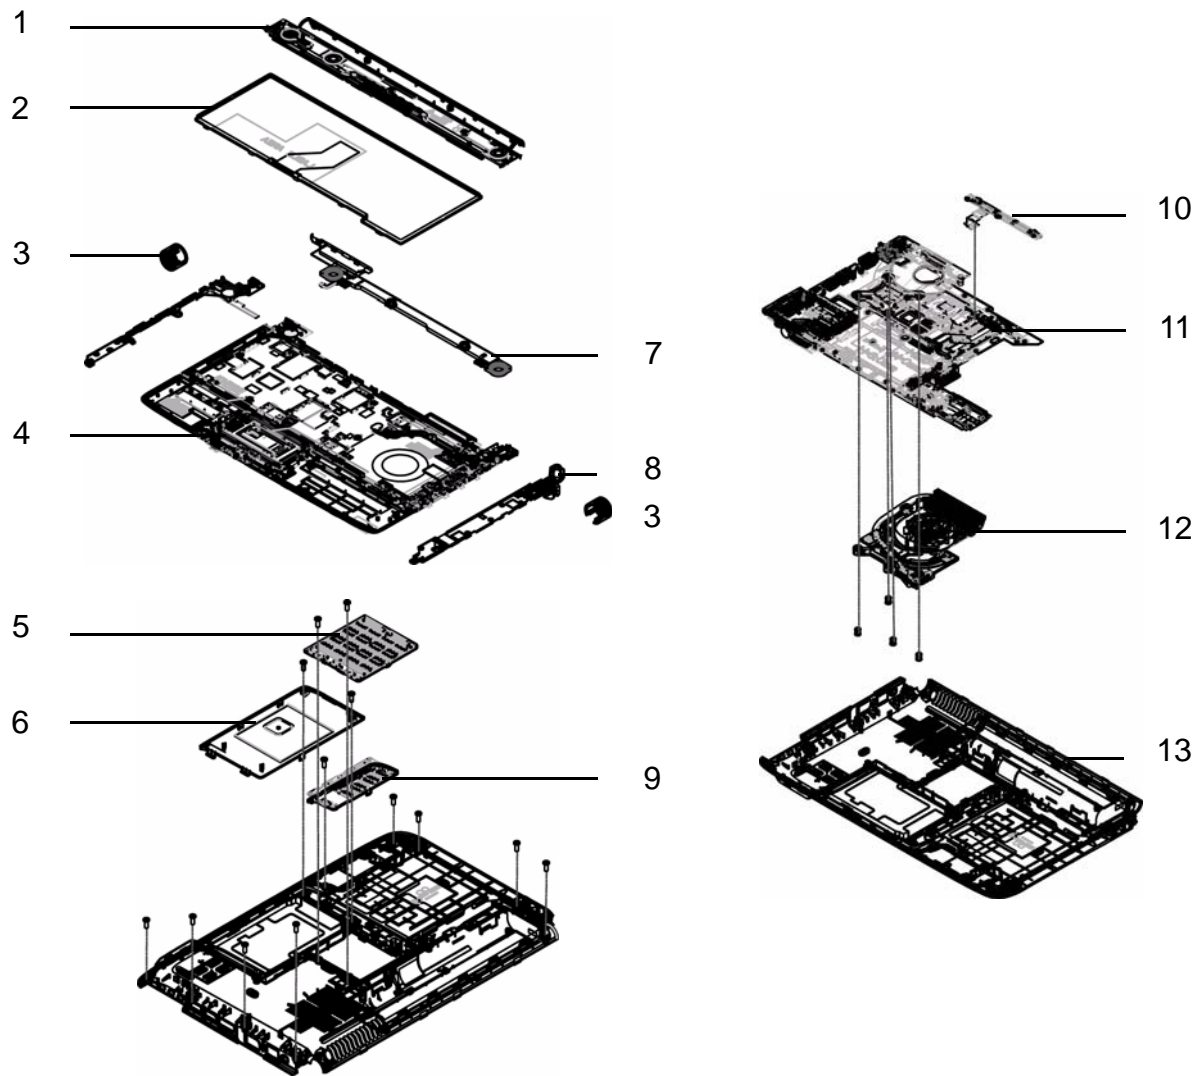


Aspire 4935/4935G Exploded Diagrams

Main Module



| Item | Description | Part No. | Item | Description | Part No. |
|------|----------------------------|--------------|------|----------------|--------------|
| 1 | Switch Cover | 60.AD302.001 | 8 | Media Board | 55.AD302.003 |
| 2 | Keyboard | KB.INT00.261 | 9 | Mini Door | 42.AD302.006 |
| 3 | Hinge Cover Left and Right | 42.AD302.003 | 10 | Function Board | 55.AD302.002 |
| 4 | Upper Cover | 60.AC602.001 | 11 | Mainboard | MB.AD302.001 |
| 5 | Memory Door | 42.AD302.005 | 12 | Thermal Module | 60.AC702.001 |
| 6 | HDD Door | 42.AD302.004 | 13 | Lower Cover | 60.AD302.003 |
| 7 | Speaker | 23.AD302.001 | | | |

Aspire 4935/4935G FRU List

| Category | Description | Acer P/N |
|---|---|--------------|
| Adapter | | |
|  | ADAPTER 65W 3PIN DELTA SADP-65KB DFJ | AP.06501.022 |
| | ADAPTER 65W 3PIN DELTA SADP-65KB BFJG OBL | AP.06501.023 |
| | ADAPTER 65W 3PIN HIPRO AC-OK065B13 | AP.0650A.011 |
| | ADAPTER 90W 3PIN DELTA ADP-90SB BBGF | AP.09001.023 |
| | ADAPTER 90W 3PIN DELTA ADP-90SB BBGE OBL | AP.09001.024 |
| | ADAPTER 90W 3PIN HIPRO AC-OL093B13P | AP.0900A.004 |
| Battery | | |
|  | BATTERY LI-ION 6CELL 4.4KMAH SANYO SA 3S2P | BT.00603.041 |
| | BATTERY LI-ION 6CELL 4.4KMAH SONY SY SY 3S2P | TBD |
| | BATTERY LI-ION 6CELL 4.4KMAH PANASONIC PA PA 3S2P | TBD |
| | BATTERY LI-ION 6CELL 4.4KAH SIMPRO SP LG 3S2P | TBD |
| | BATTERY LI-ION 6CELL 4.4KAH SIMPLO SP PA 3S2P | TBD |
| | BATTERY LI-ION 6CELL 4.4KAH SIMPRO SP SM 3S2P | TBD |
| Board | | |
|  | E-KEY BOARD | 55.AD302.001 |
|  | FINGER PRINT BOARD | 55.AC602.001 |
|  | FUNCTION BOARD | 55.AD302.002 |
|  | MEDIA BOARD | 55.AD302.003 |
|  | USB BOARD | 55.AD302.004 |
|  | BLUE TOOTH | BT.21100.002 |
|  | MODEM | FX.22500.025 |







| Category | Description | Acer P/N |
|---|--|--------------|
|  | W/L CARD INTEL 1X2 512AN_MMWG SIN/PHI FCC/IC | KI.SPM01.003 |
| | W/L CARD INTEL 1X2 512AN_MMWG 150 FCC/IC | KI.SPM01.003 |
| | W/L CARD INTEL 3X3 533AN_MMWG SIN/PHI FCC/IC | KI.SPM01.001 |
| | W/L CARD INTEL 3X3 533AN_MMWG FCC/IC | KI.SPM01.001 |
| | W/L CARD RT2700E RALINK | NI.23600.031 |
| | W/L CARD XB91 Atheros | NI.23600.030 |
| Cable | | |
|  | BLUETOOTH CABLE | 50.AD302.001 |
|  | RJ11 CABLE | 50.AD302.002 |
|  | TP FFC | 50.AD302.003 |
| Case/Cover/Bracket Assembly | | |
|  | STRIP COVER | 60.AD302.001 |
|  | UPPER CASE ASSY W/FP | 60.AC602.001 |
| | UPPER CASE ASSY W/O FP | 60.AD302.002 |
|  | LOWER CASE ASSY FOR W/HDMI | 60.AD302.003 |
| | LOWER CASE ASSY FOR W/O HDMI | 60.AD302.004 |
|  | MEDIA CONSOLE MYLAR | 42.AD302.001 |
|  | MEDIA BACK LIGHT | 42.AD302.002 |

| Category | Description | Acer P/N |
|---|---|--------------|
|  | FP BRACKET | 33.AD302.001 |
|  | TP BRACKET | 33.AD302.002 |
|  | HINGE CAP R&L | 42.AD302.003 |
|  | HDD DOOR | 42.AD302.004 |
|  | RAM DOOR | 42.AD302.005 |
|  | MINI DOOR | 42.AD302.006 |
| CPU/Processor | | |
|  | CPU INTEL P8400 2.26G AW80577SH0513M SLB3R M0 | KC.84001.DPP |
| | CPU INTEL P8600 2.4G AW80577SH0563M SLB3S M0 | KC.86001.DPP |
| | CPU INTEL P9500 2.53G AW80576SH0616M SLB4E C0 | KC.95001.DPP |
| | CPU INTEL P7350 2G AW80577SH0413M SLB53 M0 | KC.73501.DPP |
| | CPU INTEL T9400 2.53G AW80576GH0616M SLB46 C0 | KC.94001.DTP |
| | CPU INTEL T9600 2.8G AW80576GH0726M SLB47 C0 | KC.96001.DTP |
| | CPU INTEL T5900 2.2G LF80537GG049F SLB6D M0 | KC.59001.DTP |
| | CPU INTEL T5800 2.0G LF80537GG041F SLB6E M0 | KC.58001.DTP |
| Combo Drive | | |
|  | DVD/CDRW COMBO DRIVE MODULE | 6M.AD302.001 |
| | DVD/CDRW COMBO DRIVE TS-L463A TOSHIBA | KO.02401.006 |
| | DVD/CDRW COMBO DRIVE CRX890S SONY | KO.0240E.009 |

| Category | Description | Acer P/N |
|---|-------------------------------------|--------------|
|  | ODD BEZEL-COMBO | 42.AD302.007 |
|  | ODD BRACKET | 33.AD302.003 |
| Super Multi Drive | | |
|  | DVD SUPER MULTI DRIVE MODULE | 6M.AD302.002 |
| | DVD SUPER MULTI DRIVE TS-L633A TSST | KU.00801.021 |
| | DVD SUPER MULTI DRIVE GT10N HLDS | KU.0080D.039 |
| | DVD SUPER MULTI DRIVE DS-8A2S PLDS | KU.0080F.001 |
| | DVD SUPER MULTI DRIVE AD-7580S SONY | KU.0080E.017 |
|  | ODD BEZEL-SUPER MULTI | 42.AD302.008 |
|  | ODD BRACKET | 33.AD302.003 |
| Blueray Combo | | |
|  | BR-DVD SUPER MULTI DRIVE MODULE | 6M.AD302.003 |
| | BR-DVD DRIVE DS-4E1S PLDS | KO.0020F.001 |
| | BR-DVD DRIVE BC-5500S SONY | KO.0020E.002 |
| | BR-DVD DRIVE CT10N HITACHI | KO.0020D.001 |
|  | ODD BEZEL-BR DVD | 42.AD302.009 |
|  | ODD BRACKET | 33.AD302.003 |

| Category | Description | Acer P/N |
|--|--|--------------|
| HDD | | |
|  | HDD SATA 160G 5400RPM HGST HTS543216L9A300 | KH.16007.019 |
| | HDD SATA 160G 5400RPM TOSHIBA MK1652GSX | TBD |
| | HDD SATA 160G 5400RPM SEAGATE ST9160310AS | KH.16001.034 |
| | HDD SATA 160G 5400RPM WD WD1600BEVT-22ZCT0 | KH.16008.022 |
| | HDD SATA 250G 5400RPM HGST HTS543225L9A300 | KH.25007.013 |
| | HDD SATA 250G 5400RPM TOSHIBA MK2552GSX | KH.25004.002 |
| | HDD SATA 250G 5400RPM WD WD2500BEVT-22ZCT0 | KH.25008.021 |
| | HDD SATA 250G 5400RPM SEAGATE ST9250827AS | KH.25001.011 |
| | HDD SATA 320G 5400RPM HGST HTS543232L9A300 | KH.32007.004 |
| | HDD SATA 320G 5400RPM TOSHIBA MK3252GSX | KH.32004.001 |
| | HDD SATA 320G 5400RPM SEAGATE ST9320320AS | KH.32001.008 |
| | HDD SATA 320G 5400RPM WD WD3200BEVT-22ZCT0 | KH.32008.013 |
|  | HDD BRACKET | 33.AD302.004 |
| Keyboard | | |
|  | KEYBOARD INTE(UI) | KB.INT00.261 |
| | KEYBOARD (GK) GREEK | KB.INT00.282 |
| | KEYBOARD (ARE) ARABIC ENGLISH | KB.INT00.293 |
| | KEYBOARD (CH) T-CHINESE | KB.INT00.289 |
| | KEYBOARD (KO) KOREAN | KB.INT00.276 |
| | KEYBOARD (RU) RUSSIAN | KB.INT00.271 |
| | KEYBOARD (TI) THAILAND | KB.INT00.265 |
| | KEYBOARD (HB) HEBREW | KB.INT00.262 |
| | KEYBOARD UK | KB.INT00.263 |
| | KEYBOARD (GR) GERMAN | KB.INT00.283 |
| | KEYBOARD (SW) SWITZERLAND | KB.INT00.266 |
| | KEYBOARD (CF) CANADIAN FRENCH | KB.INT00.290 |
| | KEYBOARD (BE) BELGIAN | KB.INT00.292 |
| | KEYBOARD (DM) DENMARK | KB.INT00.287 |
| | KEYBOARD (IT) ITALIAN | KB.INT00.278 |
| | KEYBOARD (FR) FRENCH | KB.INT00.284 |
| | KEYBOARD (HG) HUNGARY | KB.INT00.281 |
| | KEYBOARD (NW) NORWEGIAN | KB.INT00.274 |
| | KEYBOARD (PO) PORTUGUESE | KB.INT00.272 |
| | KEYBOARD (SP) SPANISH | KB.INT00.268 |
| | KEYBOARD (TR) TURKISH | KB.INT00.264 |
| | KEYBOARD (SD) SWEDISH | KB.INT00.267 |
| | KEYBOARD (SA/CR) SLOVENIAN | KB.INT00.270 |
| | KEYBOARD (NL) NETHERLANDS | KB.INT00.286 |

| Category | Description | Acer P/N |
|---|--|--------------|
|  | KEYBOARD (ND) SCANDINAVIAN | KB.INT00.295 |
| | KEYBOARD (AR/FR) ARABIC/FRENCH | KB.INT00.294 |
| | KEYBOARD (CB) CANADIAN BILINGUAL | KB.INT00.296 |
| | KEYBOARD (SV) SLOVAK | KB.INT00.269 |
| | KEYBOARD (BZ) BRAZILIAN | KB.INT00.291 |
| | KEYBOARD (CZ/SK) CZECH-SLOVAKIAN | KB.I1400.001 |
| | KEYBOARD JA | KB.INT00.277 |
| LCD | | |
|  | ASSY LCD MODULE 14.1 IN. WXGA GLARE W/ ANTENNA CCD | 6M.AD302.004 |
| | LED PANEL 14 AUO B140XW01 V0 | LK.14005.006 |
| | LED PANEL 14 CMO N140B6-L02 | LK.1400D.004 |
| | LED PANEL 14 LPL LP140WH1-TLA1 | LK.14008.001 |
| | LED PANEL 14 SEC LTN140AT01-G01 | LK.14006.009 |
|  | LVDS CABLE | 50.AD302.004 |
|  | LCD BRACKET R&L | 33.AD302.005 |
|  | LCD BEZEL | 60.AD302.005 |
|  | LCD COVER-IMR | 60.AD302.006 |
|  | ANTENNA R-1X2 | 50.AD302.005 |
| | ANTENNA R-3X3 | 50.AD302.006 |
|  | ANTENNA L | 50.AD302.007 |
|  | CAMERA 1.0 | 57.AD302.001 |

| Category | Description | Acer P/N |
|---|---|--------------|
|  | CAMERA BRACKET | 33.AD302.006 |
| Mainboard | | |
|  | MB ASSY W/O CPU/RAM-UMA | MB.AD302.001 |
| | MB ASSY 256MB W/O CPU/RAM-DIS | TBD |
| | MB ASSY 512MB W/O CPU/RAM-DIS | MB.AC902.001 |
| Memory | | |
|  | RAM 512M DDRII 667 SAMSUNG M470T6464QZ3-CE6 | KN.5120B.026 |
| | RAM 512M DDRII 667 HYNIX HYMP164S64CP6-Y5 | KN.5120G.024 |
| | RAM 1G DDRII 667 NANYA NT1GT64UH8D0FN-3C | KN.1GB03.026 |
| | RAM 1G DDRII 667 SAMSUNG M470T2864QZ3-CE6 | KN.1GB0B.016 |
| | RAM 1G DDRII 667 ELPIDA EBE11UE6ACUA-6E-E | KN.1GB09.008 |
| | RAM 1G DDRII 667 HYNIX HYMP112S64CP6-Y5 | KN.1GB0G.012 |
| | RAM 2G DDRII 667 HYNIX HYMP125S64CP8-Y5 | KN.2GB0G.004 |
| | RAM 2G DDRII 667 SAMSUNG M470T5663QZ3-CE6 | KN.2GB0B.003 |
| | RAM 2G DDRII 667 NANYA NT2GT64U8HD0BN-3C | KN.2GB03.011 |
| | RAM 2G DDRII 667 ELPIDA EBE21UE8ACUA-6E-E | KN.2GB09.001 |
| Heatsink | | |
|  | CPU THERMAL MODULE-DIS | 60.AC702.001 |
| | CPU THERMAL MODULE-UMA | 60.AD302.007 |
| Speaker | | |
|  | SPEAKER | 23.AD302.001 |
|  | DIGITAL MIC | 23.AD302.002 |
| Miscellaneous | | |
| | NAME PLATE-AS4935 | 47.AD302.001 |

Screw List

| Category | Description | Acer P/N. |
|----------|----------------------------------|--------------|
| Screw | | |
| | SCREW M2.0D 3.0L K4.6D 0.8T ZK | 86.AD302.001 |
| | SCREW M 2.5D 3.0L K5.5D 0.8T ZK | 86.AD302.002 |
| | SCREW M 2.5D 5L K 5.5D ZK NL | 86.AD302.003 |
| | SCREW M2.5D 10.0L K 5.5D 0.8T ZK | 86.AD302.004 |
| | SCREW M M 3.0D 3.0L K 4.9D NI+ | 86.AD302.005 |
| | SCREW M M 2.5D 3.2L K 6D NI+ | 86.AD302.006 |

Model Definition and Configuration

Aspire 4935/4935G Series

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|-----|-----------------|--------------|---|----------|
| AS4935-581G16Mn | AAP | Vietnam | LX.AD30C.002 | AS4935-581G16Mn LINPUSAVN1 UMAC 1*1G/ 160/BT/6L/6R/ CB_n2_1.0D_HG_EN11 | C2DT5800 |
| AS4935-581G16Mn | PA | Canada | LX.AD30X.034 | AS4935-581G16Mn VHP32ATCA2 MC UMAC 1*1G/160/6L/6R/ CB_n2_1.0D_HG_FR33 | C2DT5800 |
| AS4935-581G16Mn | PA | USA | LX.AD30X.033 | AS4935-581G16Mn VHP32ATUS1 MC UMAC 1*1G/160/6L/6R/ CB_n2_1.0D_HG_EN32 | C2DT5800 |
| AS4935-581G16Mn | PA | USA | LX.AD30X.032 | AS4935-581G16Mn VHP32ATUS1 MC UMAC 1*1G/160/6L/6R/ CB_n2_1.0D_HG_EN33 | C2DT5800 |
| AS4935-581G16Mn | PA | ACLA-Portuguese | LX.AD30X.031 | AS4935-581G16Mn EM VHP32ATXC2 MC UMAC 1*1G/160/6L/6R/ CB_n2_1.0D_HG_XC21 | C2DT5800 |
| AS4935-581G16Mn | PA | ACLA-Spanish | LX.AD30X.030 | AS4935-581G16Mn EM VHP32ATEA3 MC UMAC 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5800 |
| AS4935-581G16Mn | PA | ACLA-Spanish | LX.AD30X.029 | AS4935-581G16Mn VHP32ATEA1 MC UMAC 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5800 |
| AS4935-581G16Mn | AAP | Malaysia | LX.AD30C.001 | AS4935-581G16Mn LINPUSAMY1 UMAC 1*1G/ 160/BT/6L/6R/ CB_n2_1.0D_HG_EN11 | C2DT5800 |
| AS4935-581G25Mn | AAP | Thailand | LX.AC60C.001 | AS4935-581G25Mn LINPUSATH1 UMACEF 1*1G/ 250/BT/6L/6R/ CB_n_FP_1.0D_HG_EN11 | C2DT5800 |
| AS4935-581G25Mn | AAP | Indonesia | LX.AC60X.001 | AS4935-581G25Mn EM VHP32ATID1 MC UMACEF 1*1G/250/6L/6R/ CB_n_FP_1.0D_HG_ID22 | C2DT5800 |
| AS4935-581G32Mn | AAP | Indonesia | LX.AC60X.022 | AS4935-581G32Mn EM VHP32ATID1 MC UMACEF 1*1G/320/BT/6L/6R/ CB_n2_FP_1.0D_HG_ID24 | C2DT5800 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|-----|-----------------|--------------|---|----------|
| AS4935-582G16Mn | AAP | Malaysia | LX.AD30X.077 | AS4935-582G16Mn EM VHP32ATMY1 MC UMAC E 1*2G/160/BT/6L/6R/ CB_n2_1.0D_HG_EN14 | C2DT5800 |
| AS4935-582G25Mn | AAP | Vietnam | LX.AD30C.004 | AS4935-582G25Mn LINPUSAVN1 UMAC E 1*2G/ 250/BT/6L/6R/ CB_n2_1.0D_HG_EN11 | C2DT5800 |
| AS4935-582G32Mn | AAP | Singapore | LX.AC60X.002 | AS4935-582G32Mn VHP32ATSG1 MC UMAC EF 1*2G/320/BT/6L/6R/ CB_n2_FP_1.0D_HG_ZH31 | C2DT5800 |
| AS4935-583G16Mn | PA | Canada | LX.AD30X.021 | AS4935-583G16Mn VHP32ATCA2 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_FR31 | C2DT5800 |
| AS4935-583G16Mn | PA | Canada | LX.AD30X.020 | AS4935-583G16Mn VHP32ATCA2 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_FR35 | C2DT5800 |
| AS4935-583G16Mn | PA | Canada | LX.AD30X.019 | AS4935-583G16Mn VHP32ATCA2 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_FR33 | C2DT5800 |
| AS4935-583G16Mn | PA | USA | LX.AD30X.018 | AS4935-583G16Mn VHP32ATUS1 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_EN32 | C2DT5800 |
| AS4935-583G16Mn | PA | USA | LX.AD30X.017 | AS4935-583G16Mn VHP32ATUS1 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_EN33 | C2DT5800 |
| AS4935-583G16Mn | PA | ACLA-Portuguese | LX.AD30X.014 | AS4935-583G16Mn EM VHP32ATXC2 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_XC21 | C2DT5800 |
| AS4935-583G16Mn | PA | ACLA-Portuguese | LX.AD30X.015 | AS4935-583G16Mn VHP32ATXC2 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_XC22 | C2DT5800 |
| AS4935-583G16Mn | PA | ACLA-Spanish | LX.AD30X.016 | AS4935-583G16Mn EM VHP32ATEA1 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5800 |
| AS4935-583G16Mn | PA | ACLA-Spanish | LX.AD30X.013 | AS4935-583G16Mn VHP32ATEA3 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5800 |
| AS4935-583G16Mn | PA | ACLA-Spanish | LX.AD30X.012 | AS4935-583G16Mn EM VHP32ATEA3 MC UMAC E 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5800 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|------|--------------------|--------------|---|----------|
| AS4935-583G16Mn | PA | ACLA-Spanish | LX.AD30X.011 | AS4935-583G16Mn VHP32ATEA1 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5800 |
| AS4935-583G25Mn | EMEA | South Africa | LX.AD30X.073 | AS4935-583G25Mn EM VHP32ATZA2 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EN16 | C2DT5800 |
| AS4935-583G25Mn | EMEA | South Africa | LX.AD30X.072 | AS4935-583G25Mn EM VHP32ATZA1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_FR23 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Denmark | LX.AD30X.074 | AS4935-583G25Mn VHP32ATDK1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_NO13 | C2DT5800 |
| AS4935-583G25Mn | EMEA | France | LX.AD30X.071 | AS4935-583G25Mn VHP32ATFR1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_FR23 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Belgium | LX.AD30X.075 | AS4935-583G25Mn VHP32ATBE1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_NL13 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Holland | LX.AD30X.070 | AS4935-583G25Mn VHP32ATNL1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_NL12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Luxembourg | LX.AD30X.069 | AS4935-583G25Mn VHP32ATLU1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_IT42 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Norway | LX.AD30X.068 | AS4935-583G25Mn VHP32ATNO1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_NO12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Russia | LX.AD30X.064 | AS4935-583G25Mn VHP32ATRU1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_RU11 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Ukraine | LX.AD30X.063 | AS4935-583G25Mn VHP32ATUK1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_RU11 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Sweden/ Finland | LX.AD30X.065 | AS4935-583G25Mn VHP32ATSE1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_FI12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Eastern Europe | LX.AD30X.062 | AS4935-583G25Mn VHP32ATEU4 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_FI12 | C2DT5800 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|------|----------------------|--------------|--|----------|
| AS4935-583G25Mn | EMEA | Eastern Europe | LX.AD30X.066 | AS4935-583G25Mn VHP32ATEU3 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_RU22 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Eastern Europe | LX.AD30X.061 | AS4935-583G25Mn VHP32ATEU3 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_RU12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Eastern Europe | LX.AD30X.067 | AS4935-583G25Mn VHP32ATEU5 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_PL12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Eastern Europe | LX.AD30X.060 | AS4935-583G25Mn VHP32ATEU7 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_ENR1 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Hungary | LX.AD30X.059 | AS4935-583G25Mn VHP32ATHU1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_HU12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Slovenia/ Croatia | LX.AD30X.058 | AS4935-583G25Mn VHP32ATSI1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EN13 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Portugal | LX.AD30X.054 | AS4935-583G25Mn VHP32ATPT1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_PT12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Spain | LX.AD30X.053 | AS4935-583G25Mn VHP32ATES1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Greece | LX.AD30X.055 | AS4935-583G25Mn VHP32ATGR1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EL32 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Greece | LX.AD30X.052 | AS4935-583G25Mn VHP32ATGR1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EL22 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Israel | LX.AD30X.056 | AS4935-583G25Mn VHP32ATIL1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_HE12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Italy | LX.AD30X.051 | AS4935-583G25Mn VHP32ATIT1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_IT12 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Turkey | LX.AD30X.057 | AS4935-583G25Mn EM VHP32ATTR1 MC UMAC 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_TR32 | C2DT5800 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|------|-------------|--------------|--|----------|
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.047 | AS4935-583G25Mn EM VHP32ATME9 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_FR22 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.050 | AS4935-583G25Mn EM VHP32ATME2 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_AR23 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.046 | AS4935-583G25Mn EM VHP32ATME3 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_FR23 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.049 | AS4935-583G25Mn EM VHP32ATME4 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EN11 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.045 | AS4935-583G25Mn EM VHP32ATME2 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_AR13 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.048 | AS4935-583G25Mn EM VHP32ATME2 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EN15 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Middle East | LX.AD30X.044 | AS4935-583G25Mn EM VHP32ATME6 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EN15 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Switzerland | LX.AD30X.043 | AS4935-583G25Mn VHP32ATCH1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_IT42 | C2DT5800 |
| AS4935-583G25Mn | EMEA | UK | LX.AD30X.042 | AS4935-583G25Mn VHP32ATGB1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_EN14 | C2DT5800 |
| AS4935-583G25Mn | EMEA | Germany | LX.AD30X.076 | AS4935-583G25Mn VHP32ATDE1 MC UMACE 2G+1G/250/6L/6R/ CB_n2_1.0D_HG_DE13 | C2DT5800 |
| AS4935-583G32Mn | AAP | Singapore | LX.AC60X.020 | AS4935-583G32Mn VHP32ATSG1 MC UMACEF 2G+1G/320/BT/6L/6R/ CB_n2_FP_1.0D_HG_ZH31 | C2DT5800 |
| AS4935-591G16Mn | PA | Canada | LX.AD30X.027 | AS4935-591G16Mn VHP32ATCA2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_FR35 | C2DT5900 |
| AS4935-591G16Mn | PA | Canada | LX.AD30X.028 | AS4935-591G16Mn VHP32ATCA2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_FR33 | C2DT5900 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|-----|-----------------|--------------|--|----------|
| AS4935-591G16Mn | PA | USA | LX.AD30X.024 | AS4935-591G16Mn VHP32ATUS1 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_EN33 | C2DT5900 |
| AS4935-591G16Mn | PA | ACLA-Portuguese | LX.AD30X.025 | AS4935-591G16Mn EM VHP32ATXC2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_XC21 | C2DT5900 |
| AS4935-591G16Mn | PA | ACLA-Spanish | LX.AD30X.026 | AS4935-591G16Mn VHP32ATEA3 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5900 |
| AS4935-591G16Mn | PA | ACLA-Spanish | LX.AD30X.023 | AS4935-591G16Mn EM VHP32ATEA3 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5900 |
| AS4935-591G16Mn | PA | ACLA-Spanish | LX.AD30X.022 | AS4935-591G16Mn VHP32ATEA1 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5900 |
| AS4935-591G25Mn | AAP | Thailand | LX.AC60C.002 | AS4935-591G25Mn LINPUSATH1 UMACEF 1*1G/ 250/BT/6L/6R/ CB_n2_FP_1.0D_HG_EN11 | C2DT5900 |
| AS4935-592G32Mn | AAP | Thailand | LX.AC60C.005 | AS4935-592G32Mn LINPUSATH1 UMACEF 1*2G/ 320/BT/6L/6R/ CB_n2_FP_1.0D_HG_EN11 | C2DT5900 |
| AS4935-592G32Mn | AAP | Philippines | LX.AD30X.078 | AS4935-592G32Mn EM VHP32ATPH1 MC UMACE 1*2G/320/BT/6L/6R/ CB_n2_1.0D_HG_EN14_Blue UV | C2DT5900 |
| AS4935-593G16Mn | PA | Canada | LX.AD30X.007 | AS4935-593G16Mn VHP32ATCA2 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_FR31 | C2DT5900 |
| AS4935-593G16Mn | PA | Canada | LX.AD30X.008 | AS4935-593G16Mn VHP32ATCA2 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_FR33 | C2DT5900 |
| AS4935-593G16Mn | PA | USA | LX.AD30X.009 | AS4935-593G16Mn VHP32ATUS1 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_EN32 | C2DT5900 |
| AS4935-593G16Mn | PA | USA | LX.AD30X.010 | AS4935-593G16Mn VHP32ATUS1 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_EN33 | C2DT5900 |
| AS4935-593G16Mn | PA | ACLA-Portuguese | LX.AD30X.004 | AS4935-593G16Mn EM VHP32ATXC2 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_XC21 | C2DT5900 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|-------|-----------------|--------------|--|----------|
| AS4935-593G16Mn | PA | ACLA-Portuguese | LX.AD30X.005 | AS4935-593G16Mn VHP32ATXC2 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_XC22 | C2DT5900 |
| AS4935-593G16Mn | PA | ACLA-Spanish | LX.AD30X.006 | AS4935-593G16Mn EM VHP32ATEA1 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5900 |
| AS4935-593G16Mn | PA | ACLA-Spanish | LX.AD30X.003 | AS4935-593G16Mn VHP32ATEA3 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5900 |
| AS4935-593G16Mn | PA | ACLA-Spanish | LX.AD30X.002 | AS4935-593G16Mn EM VHP32ATEA3 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DT5900 |
| AS4935-593G16Mn | PA | ACLA-Spanish | LX.AD30X.001 | AS4935-593G16Mn VHP32ATEA1 MC UMACE 2G+1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DT5900 |
| AS4935-593G32Mn | AAP | Singapore | LX.AC60X.013 | AS4935-593G32Mn VHP32ATSG1 MC UMACEF 2G+1G/320/BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DT5900 |
| AS4935-593G32Mn | AAP | Singapore | LX.AC60X.019 | AS4935-593G32Mn VHP32ATSG1 MC UMACEF 2G+1G/320/BT/6L/6R/ CB_n2_FP_1.0D_HG_ZH31 | C2DT5900 |
| AS4935-593G50Mn | AAP | Vietnam | LX.AC60X.018 | AS4935-593G50Mn EM VHP32ATVN1 MC UMACEF 2G+1G/500_L/BT/6L/6R/ CB_n3_FP_1.0D_HG_EN13 | C2DT5900 |
| AS4935-731G16Mn | CHINA | China | LX.AC60Y.002 | AS4935-731G16Mn VHB32ATCN1 MC UMACEF 1*1G/160/6L/6R/ CB_n2_FP_1.0D_HG_SC11 | C2DP7350 |
| AS4935-731G16Mn | PA | Canada | LX.AD30X.041 | AS4935-731G16Mn VHP32ATCA2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_FR31 | C2DP7350 |
| AS4935-731G16Mn | PA | Canada | LX.AD30X.040 | AS4935-731G16Mn VHP32ATCA2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_FR35 | C2DP7350 |
| AS4935-731G16Mn | PA | Canada | LX.AD30X.039 | AS4935-731G16Mn VHP32ATCA2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_FR33 | C2DP7350 |
| AS4935-731G16Mn | PA | USA | LX.AD30X.038 | AS4935-731G16Mn VHP32ATUS1 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_EN32 | C2DP7350 |

| Model | RO | Country | Acer Part No | Description | CPU |
|-----------------|-------|-----------------|--------------|--|----------|
| AS4935-731G16Mn | PA | ACLA-Portuguese | LX.AD30X.037 | AS4935-731G16Mn EM VHP32ATXC2 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_XC21 | C2DP7350 |
| AS4935-731G16Mn | PA | ACLA-Spanish | LX.AD30X.036 | AS4935-731G16Mn EM VHP32ATEA3 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES22 | C2DP7350 |
| AS4935-731G16Mn | PA | ACLA-Spanish | LX.AD30X.035 | AS4935-731G16Mn VHP32ATEA1 MC UMACE 1*1G/160/6L/6R/ CB_n2_1.0D_HG_ES21 | C2DP7350 |
| AS4935-731G25Mn | CHINA | China | LX.AC60C.004 | AS4935-731G25Mn LINPUSACN1 UMACEF 1*1G/250/6L/6R/ CB_n2_FP_1.0D_HG_EN91 | C2DP7350 |
| AS4935-731G25Mn | CHINA | China | LX.AC60Y.001 | AS4935-731G25Mn VHB32ATCN1 MC UMACEF 1*1G/250/6L/6R/ CB_n2_FP_1.0D_HG_SC11 | C2DP7350 |
| AS4935-732G25Mn | AAP | Vietnam | LX.AC60C.003 | AS4935-732G25Mn LINPUSAVN1 UMACEF 1*2G/250/BT/6L/6R/ CB_n2_FP_1.0D_HG_EN11 | C2DP7350 |
| AS4935-733G25Mn | PA | Canada | LX.AC60X.009 | AS4935-733G25Mn VHP32ATCA2 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_FR31 | C2DP7350 |
| AS4935-733G25Mn | PA | Canada | LX.AC60X.010 | AS4935-733G25Mn VHP32ATCA2 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_FR33 | C2DP7350 |
| AS4935-733G25Mn | PA | USA | LX.AC60X.011 | AS4935-733G25Mn VHP32ATUS1 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_EN32 | C2DP7350 |
| AS4935-733G25Mn | PA | USA | LX.AC60X.012 | AS4935-733G25Mn VHP32ATUS1 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_EN33 | C2DP7350 |
| AS4935-733G25Mn | PA | ACLA-Portuguese | LX.AC60X.008 | AS4935-733G25Mn EM VHP32ATXC2 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_XC21 | C2DP7350 |
| AS4935-733G25Mn | PA | ACLA-Portuguese | LX.AC60X.006 | AS4935-733G25Mn VHP32ATXC2 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_XC22 | C2DP7350 |
| AS4935-733G25Mn | PA | ACLA-Spanish | LX.AC60X.007 | AS4935-733G25Mn EM VHP32ATEA1 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_ES22 | C2DP7350 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|-------|--------------|--------------|---|----------|
| AS4935-733G25Mn | PA | ACLA-Spanish | LX.AC60X.005 | AS4935-733G25Mn VHP32ATEA3 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_ES21 | C2DP7350 |
| AS4935-733G25Mn | PA | ACLA-Spanish | LX.AC60X.004 | AS4935-733G25Mn EM VHP32ATEA3 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_ES22 | C2DP7350 |
| AS4935-733G25Mn | PA | ACLA-Spanish | LX.AC60X.003 | AS4935-733G25Mn VHP32ATEA1 MC UMACEF 2G+1G/250/6L/6R/ CB_n2_FP_1.0D_HG_ES21 | C2DP7350 |
| AS4935-733G32Mn | AAP | Vietnam | LX.AD30C.003 | AS4935-733G32Mn LINPUSAVN1 UMACE 2G+1G/ 320/BT/6L/6R/ CB_n2_1.0D_HG_EN11 | C2DP7350 |
| AS4935-842G25Mn | AAP | Malaysia | LX.AC60X.016 | AS4935-842G25Mn EM VHP32ATMY1 MC UMACEF 1*2G/250/BT/6L/6R/ CB_n2_FP_1.0D_HG_EN14 | C2DP8400 |
| AS4935-843G32Mn | AAP | Singapore | LX.AC60X.017 | AS4935-843G32Mn VHP32ATSG1 MC UMACEF 2G+1G/320/BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31_Blue UV | C2DP8400 |
| AS4935-843G32Mn | AAP | Singapore | LX.AC60X.015 | AS4935-843G32Mn VHP32ATSG1 MC UMACEF 2G+1G/320/BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP8400 |
| AS4935-861G25Mn | WW | WW | S2.AC60X.001 | AS4935-861G25Mn VHP32AWW1 MC UMACEF 1*1G/250/6L/6R/ CB_n_FP_1.0D_HG_EN11for RO B sam | C2DP8600 |
| AS4935-863G32Mn | AAP | Singapore | LX.AC60X.014 | AS4935-863G32Mn VHP32ATSG1 MC UMACEF 2G+1G/320/BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP8600 |
| AS4935-864G32Mn | AAP | Singapore | LX.AC60X.021 | AS4935-864G32Mn VHP32ATSG1 MC UMACEF 2*2G/320/BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP8600 |
| AS4935G-581G16Mn | CHINA | China | LX.AD80X.025 | AS4935G-581G16Mn VHP32ATCN1 MC 9MGSHM512CEF 1*1G/160/6L/6R/CB_n2_FP_1.0D_HG_SC11 | C2DT5800 |
| AS4935G-582G32Mn | TWN | GCTWN | LX.AD80X.005 | AS4935G-582G32Mn VHP32ATTW1 MC 9MGSHM512CEF 1*2G/320/BT/6L/6R/ CB_n2_FP_1.0D_HG_TC11 | C2DT5800 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|-------|--------------|--------------|--|----------|
| AS4935G-582G32Mn | CHINA | China | LX.AD80X.002 | AS4935G-582G32Mn VHP32ATCN1 MC 9MGSHM512CEF 1*2G/320/6L/ 6R/CB_n2_FP_1.0D_HG_SC11 | C2DT5800 |
| AS4935G-592G32Mn | AAP | Thailand | LX.AD80C.002 | AS4935G-592G32Mn LINPUSATH1 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_EN11 | C2DT5900 |
| AS4935G-592G32Mn | AAP | Thailand | LX.AD80X.019 | AS4935G-592G32Mn EM VHP32ATTH1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_TH22 | C2DT5900 |
| AS4935G-592G32Mn | AAP | Thailand | LX.AD80C.005 | AS4935G-592G32Mn LINPUSATH1 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_EN11 | C2DT5900 |
| AS4935G-644G32Mi | EMEA | Russia | LX.AC90X.079 | AS4935G-644G32Mi VHP32ATRU1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_abg_1.0D_HG_RU11 | C2DT6400 |
| AS4935G-644G32Mi | EMEA | Ukraine | LX.AC90X.051 | AS4935G-644G32Mi VHP32ATUK1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_abg_1.0D_HG_RU11 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | South Africa | LX.AC90X.083 | AS4935G-644G32Mn EM VHP32ATZA2 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EN16 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | South Africa | LX.AC90X.084 | AS4935G-644G32Mn EM VHP32ATZA1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_FR23 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Denmark | LX.AC90X.082 | AS4935G-644G32Mn VHP32ATDK1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_NO13 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | France | LX.AC90X.081 | AS4935G-644G32Mn VHP32ATFR1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_FR23 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Germany | LX.AC90X.080 | AS4935G-644G32Mn VHP32ATDE1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_DE13 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Belgium | LX.AC90X.076 | AS4935G-644G32Mn VHP32ATBE1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_NL13 | C2DT6400 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|------|----------------------|--------------|---|----------|
| AS4935G-644G32Mn | EMEA | Holland | LX.AC90X.077 | AS4935G-644G32Mn VHP32ATNL1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_NL12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Luxembourg | LX.AC90X.078 | AS4935G-644G32Mn VHP32ATLU1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_IT42 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Sweden/ Finland | LX.AC90X.073 | AS4935G-644G32Mn VHP32ATSE1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_FI12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Eastern Europe | LX.AC90X.074 | AS4935G-644G32Mn VHP32ATEU4 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_FI12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Eastern Europe | LX.AC90X.075 | AS4935G-644G32Mn VHP32ATEU3 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_RU22 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Eastern Europe | LX.AC90X.072 | AS4935G-644G32Mn VHP32ATEU3 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_RU12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Eastern Europe | LX.AC90X.071 | AS4935G-644G32Mn VHP32ATEU5 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_PL12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Eastern Europe | LX.AC90X.070 | AS4935G-644G32Mn VHP32ATEU7 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_ENR1 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Hungary | LX.AC90X.066 | AS4935G-644G32Mn VHP32ATHU1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_HU12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Norway | LX.AC90X.067 | AS4935G-644G32Mn VHP32ATNO1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_NO12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Slovenia/ Croatia | LX.AC90X.068 | AS4935G-644G32Mn VHP32ATSI1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EN13 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Portugal | LX.AC90X.069 | AS4935G-644G32Mn VHP32ATPT1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_PT12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Spain | LX.AC90X.063 | AS4935G-644G32Mn VHP32ATES1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_ES22 | C2DT6400 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|------|-------------|--------------|--|----------|
| AS4935G-644G32Mn | EMEA | Greece | LX.AC90X.064 | AS4935G-644G32Mn VHP32ATGR1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EL32 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Greece | LX.AC90X.065 | AS4935G-644G32Mn VHP32ATGR1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EL22 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Israel | LX.AC90X.062 | AS4935G-644G32Mn VHP32ATIL1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_HE12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Italy | LX.AC90X.061 | AS4935G-644G32Mn VHP32ATIT1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_IT12 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.060 | AS4935G-644G32Mn EM VHP32ATME9 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_FR22 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.056 | AS4935G-644G32Mn EM VHP32ATME2 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_AR23 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.057 | AS4935G-644G32Mn EM VHP32ATME3 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_FR23 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.058 | AS4935G-644G32Mn EM VHP32ATME4 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EN11 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.059 | AS4935G-644G32Mn EM VHP32ATME2 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_AR13 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.053 | AS4935G-644G32Mn EM VHP32ATME2 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EN15 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Middle East | LX.AC90X.054 | AS4935G-644G32Mn EM VHP32ATME6 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EN15 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Switzerland | LX.AC90X.055 | AS4935G-644G32Mn VHP32ATCH1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_IT42 | C2DT6400 |
| AS4935G-644G32Mn | EMEA | Turkey | LX.AC90X.052 | AS4935G-644G32Mn EM VHP32ATTR1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_TR32 | C2DT6400 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|-------|-----------|--------------|---|----------|
| AS4935G-644G32Mn | EMEA | UK | LX.AC90X.050 | AS4935G-644G32Mn VHP32ATGB1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_n2_1.0D_HG_EN14 | C2DT6400 |
| AS4935G-731G16Mn | CHINA | China | LX.AD80C.001 | AS4935G-731G16Mn LINPUSACN1 9MGSHM512CEF 1*1G/160/6L/ 6R/CB_n2_FP_1.0D_HG_EN91 | C2DP7350 |
| AS4935G-731G25Mn | CHINA | China | LX.AD80C.004 | AS4935G-731G25Mn LINPUSACN1 9MGSHM512CEF 1*1G/250/6L/ 6R/CB_n2_FP_1.0D_HG_EN91 | C2DP7350 |
| AS4935G-731G32Mn | CHINA | China | LX.AD80Y.001 | AS4935G-731G32Mn VHB32ATCN1 MC 9MGSHM512CEF 1*1G/320/6L/ 6R/CB_n2_FP_1.0D_HG_SC11 | C2DP7350 |
| AS4935G-731G32Mn | CHINA | China | LX.AD80C.003 | AS4935G-731G32Mn LINPUSACN1 9MGSHM512CEF 1*1G/320/6L/ 6R/CB_n2_FP_1.0D_HG_EN91 | C2DP7350 |
| AS4935G-732G32Mn | AAP | Singapore | LX.AD80X.009 | AS4935G-732G32Mn VHP32ATSG1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31_BI ue UV | C2DP7350 |
| AS4935G-732G32Mn | AAP | Thailand | LX.AD80X.015 | AS4935G-732G32Mn VHP32ATTH1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_TH21 | C2DP7350 |
| AS4935G-732G32Mn | AAP | Singapore | LX.AD80X.010 | AS4935G-732G32Mn VHP32ATSG1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP7350 |
| AS4935G-732G32Mn | CHINA | Hong Kong | LX.AD80X.018 | AS4935G-732G32Mn VHP32ATHK2 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_ZH31 | C2DP7350 |
| AS4935G-732G32Mn | AAP | Singapore | LX.AD80X.008 | AS4935G-732G32Mn VHP32ATSG1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_ZH31 | C2DP7350 |
| AS4935G-732G32Mn | AAP | Singapore | LX.AD80X.007 | AS4935G-732G32Mn VHP32ATSG1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_ZH31_BI ue UV | C2DP7350 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|------|-------------|--------------|--|----------|
| AS4935G-732G32Mn | AAP | Philippines | LX.AD80X.021 | AS4935G-732G32Mn EM VHP32ATPH1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_EN14_BI ue UV | C2DP7350 |
| AS4935G-732G32Mn | TWN | GCTWN | LX.AD80X.020 | AS4935G-732G32Mn VHP32ATTW1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_TC11 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Greece | LX.AC90X.048 | AS4935G-733G32Mn VHP32ATGR1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EL22 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Israel | LX.AC90X.047 | AS4935G-733G32Mn VHP32ATIL1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_HE12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Italy | LX.AC90X.046 | AS4935G-733G32Mn VHP32ATIT1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_IT12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Turkey | LX.AC90X.045 | AS4935G-733G32Mn EM VHP32ATTR1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_TR32 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.041 | AS4935G-733G32Mn EM VHP32ATME9 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_FR22 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.042 | AS4935G-733G32Mn EM VHP32ATME2 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_AR23 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.043 | AS4935G-733G32Mn EM VHP32ATME3 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_FR23 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.044 | AS4935G-733G32Mn EM VHP32ATME4 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EN11 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.038 | AS4935G-733G32Mn EM VHP32ATME2 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_AR13 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.039 | AS4935G-733G32Mn EM VHP32ATME2 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EN15 | C2DP7350 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|------|--------------|--------------|--|----------|
| AS4935G-733G32Mn | EMEA | Middle East | LX.AC90X.040 | AS4935G-733G32Mn EM VHP32ATME6 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EN15 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Switzerland | LX.AC90X.037 | AS4935G-733G32Mn VHP32ATCH1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_IT42 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | UK | LX.AC90X.036 | AS4935G-733G32Mn VHP32ATGB1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EN14 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | South Africa | LX.AC90X.035 | AS4935G-733G32Mn EM VHP32ATZA2 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EN16 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | South Africa | LX.AC90X.031 | AS4935G-733G32Mn EM VHP32ATZA1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_FR23 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Denmark | LX.AC90X.032 | AS4935G-733G32Mn VHP32ATDK1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_NO13 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | France | LX.AC90X.033 | AS4935G-733G32Mn VHP32ATFR1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_FR23 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Germany | LX.AC90X.034 | AS4935G-733G32Mn VHP32ATDE1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_DE21 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Belgium | LX.AC90X.028 | AS4935G-733G32Mn VHP32ATBE1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_NL13 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Holland | LX.AC90X.029 | AS4935G-733G32Mn VHP32ATNL1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_NL12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Luxembourg | LX.AC90X.030 | AS4935G-733G32Mn VHP32ATLU1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_IT42 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Norway | LX.AC90X.027 | AS4935G-733G32Mn VHP32ATNO1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_NO12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Russia | LX.AC90X.026 | AS4935G-733G32Mn VHP32ATRU1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_RU11 | C2DP7350 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|------|----------------------|--------------|---|----------|
| AS4935G-733G32Mn | EMEA | Ukraine | LX.AC90X.025 | AS4935G-733G32Mn VHP32ATUK1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_RU11 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Sweden/ Finland | LX.AC90X.021 | AS4935G-733G32Mn VHP32ATSE1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_FI12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Eastern Europe | LX.AC90X.022 | AS4935G-733G32Mn VHP32ATEU4 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_FI12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Eastern Europe | LX.AC90X.023 | AS4935G-733G32Mn VHP32ATEU3 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_RU22 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Eastern Europe | LX.AC90X.024 | AS4935G-733G32Mn VHP32ATEU3 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_RU12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Eastern Europe | LX.AC90X.018 | AS4935G-733G32Mn VHP32ATEU5 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_PL12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Eastern Europe | LX.AC90X.019 | AS4935G-733G32Mn VHP32ATEU7 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_ENR1 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Hungary | LX.AC90X.020 | AS4935G-733G32Mn VHP32ATHU1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_HU12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Slovenia/ Croatia | LX.AC90X.017 | AS4935G-733G32Mn VHP32ATSI1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EN13 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Portugal | LX.AC90X.016 | AS4935G-733G32Mn VHP32ATPT1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_PT12 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Spain | LX.AC90X.015 | AS4935G-733G32Mn VHP32ATES1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_ES22 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Greece | LX.AC90X.014 | AS4935G-733G32Mn VHP32ATGR1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_EL32 | C2DP7350 |
| AS4935G-733G32Mn | EMEA | Germany | LX.AC90X.049 | AS4935G-733G32Mn VHP32ATDE1 MC 9MGSHM512CE 2G+1G/320/ 6L/6R/CB_n2_1.0D_HG_DE13 | C2DP7350 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|-------|-----------|--------------|--|----------|
| AS4935G-733G32Mn | AAP | Singapore | LX.AD80X.011 | AS4935G-733G32Mn VHP32ATSG1 MC 9MGSHM512CEF 2G+1G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31_Bl ue UV | C2DP7350 |
| AS4935G-733G32Mn | AAP | Singapore | LX.AD80X.012 | AS4935G-733G32Mn VHP32ATSG1 MC 9MGSHM512CEF 2G+1G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP7350 |
| AS4935G-841G16Mn | AAP | Malaysia | LX.AD80Y.002 | AS4935G-841G16Mn EM VHB32ATMY1 MC 9MGSHM512CEF 1*1G/160/ BT/6L/6R/ CB_n2_FP_1.0D_HG_EN14 | C2DP8400 |
| AS4935G-842G16Mn | WW | WW | S2.AC80X.001 | AS4935G-842G16Mn VHP32AWW1 MC 9MGSHM256CE 2*1G/160/6L/ 6R/CB_n_1.0D_HG_EN11for RO B sam | C2DP8400 |
| AS4935G-842G25Mn | AAP | Malaysia | LX.AD80X.027 | AS4935G-842G25Mn EM VHP32ATMY1 MC 9MGSHM512CEF 1*2G/250/ BT/6L/6R/ CB_n2_FP_1.0D_HG_EN14 | C2DP8400 |
| AS4935G-842G32Mn | TWN | GCTWN | LX.AD80X.004 | AS4935G-842G32Mn VHP32ATTW1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_TC11 | C2DP8400 |
| AS4935G-842G32Mn | CHINA | China | LX.AD80X.003 | AS4935G-842G32Mn VHP32ATCN1 MC 9MGSHM512CEF 1*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_SC11 | C2DP8400 |
| AS4935G-862G25Mn | AAP | Indonesia | LX.AD80X.017 | AS4935G-862G25Mn EM VHP32ATID1 MC 9MGSHM512CEF 1*2G/250/ BT/6L/6R/ CB_n2_FP_1.0D_HG_ID24 | C2DP8600 |
| AS4935G-863G25Mn | PA | Canada | LX.AC90X.011 | AS4935G-863G25Mn VHP32ATCA1 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_FR11 | C2DP8600 |
| AS4935G-863G25Mn | PA | Canada | LX.AC90X.012 | AS4935G-863G25Mn VHP32ATCA2 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_FR33 | C2DP8600 |
| AS4935G-863G25Mn | PA | USA | LX.AC90X.013 | AS4935G-863G25Mn VHP32ATUS1 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_EN32 | C2DP8600 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|-------|-----------------|--------------|---|----------|
| AS4935G-863G25Mn | PA | USA | LX.AC90X.008 | AS4935G-863G25Mn VHP32ATUS1 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_EN33 | C2DP8600 |
| AS4935G-863G25Mn | PA | ACLA-Portuguese | LX.AC90X.009 | AS4935G-863G25Mn EM VHP32ATXC2 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_XC21 | C2DP8600 |
| AS4935G-863G25Mn | PA | ACLA-Portuguese | LX.AC90X.010 | AS4935G-863G25Mn VHP32ATXC2 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_XC22 | C2DP8600 |
| AS4935G-863G25Mn | PA | ACLA-Spanish | LX.AC90X.007 | AS4935G-863G25Mn EM VHP32ATEA1 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_ES22 | C2DP8600 |
| AS4935G-863G25Mn | PA | ACLA-Spanish | LX.AC90X.006 | AS4935G-863G25Mn EM VHP32ATEA3 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_ES22 | C2DP8600 |
| AS4935G-863G25Mn | PA | ACLA-Spanish | LX.AC90X.005 | AS4935G-863G25Mn VHP32ATEA1 MC 9MGSHM512CE 2G+1G/250/ 6L/6R/CB_n2_1.0D_HG_ES21 | C2DP8600 |
| AS4935G-863G32Mn | AAP | Indonesia | LX.AD80X.026 | AS4935G-863G32Mn EM VHP32ATID1 MC 9MGSHM512CEF 2G+1G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_ID24 | C2DP8600 |
| AS4935G-864G32Bn | AAP | Thailand | LX.AD80X.016 | AS4935G-864G32Bn VHP32ATTH1 MC 9MGSHM512CEF 2*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_TH21 | C2DP8600 |
| AS4935G-864G32Mn | AAP | Singapore | LX.AC90X.004 | AS4935G-864G32Mn VHP32ATSG1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_N_1.0D_HG_ZH31 | C2DP8600 |
| AS4935G-864G32Mn | AAP | Singapore | LX.AD80X.014 | AS4935G-864G32Mn VHP32ATSG1 MC 9MGSHM512CEF 2*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP8600 |
| AS4935G-864G32Mn | TWN | GCTWN | LX.AD80X.006 | AS4935G-864G32Mn VHP32ATTW1 MC 9MGSHM512CEF 2*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_TC11 | C2DP8600 |
| AS4935G-864G32Mn | CHINA | China | LX.AD80X.001 | AS4935G-864G32Mn VHP32ATCN1 MC 9MGSHM512CEF 2*2G/320/ BT/6L/6R/ CB_n2_FP_1.0D_HG_SC11 | C2DP8600 |

| Model | RO | Country | Acer Part No | Description | CPU |
|------------------|-----|-----------|--------------|--|----------|
| AS4935G-864G32Mn | AAP | Singapore | LX.AD80X.013 | AS4935G-864G32Mn VHP32ATSG1 MC 9MGSHM512CEF 2*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31_B ue UV | C2DP8600 |
| AS4935G-864G50Bn | AAP | Thailand | LX.AD80X.024 | AS4935G-864G50Bn VHP32ATTH1 MC 9MGSHM512CEF 2*2G/500_L/ BT/6L/6R/ CB_n3_FP_1.0D_HG_TH21 | C2DP8600 |
| AS4935G-864G50Mn | AAP | Singapore | LX.AD80X.022 | AS4935G-864G50Mn VHP32ATSG1 MC 9MGSHM512CEF 2*2G/500_L/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DP8600 |
| AS4935G-942G25Mn | WW | WW | S2.AC90X.001 | AS4935G-942G25Mn VHP32AWW1 MC 9MGSHM512CE 2*1G/250/6L/ 6R/CB_n_1.0D_HG_EN11for RO B sam | C2DT9400 |
| AS4935G-944G32Bn | WW | WW | S2.AD80X.001 | AS4935G-944G32Bn VHP32AWW1 MC 9MGSHM512CEF 2*2G/320/ BT/6L/6R/ CB_n3_FP_1.0D_HG_EN11St Helens C | C2DT9400 |
| AS4935G-944G32Mn | AAP | Singapore | LX.AC90X.003 | AS4935G-944G32Mn VHP32ATSG1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_N_1.0D_HG_ZH31 | C2DT9400 |
| AS4935G-944G50Mn | AAP | Singapore | LX.AD80X.023 | AS4935G-944G50Mn VHP32ATSG1 MC 9MGSHM512CEF 2*2G/500_L/ BT/6L/6R/ CB_n3_FP_1.0D_HG_ZH31 | C2DT9400 |
| AS4935G-952G25Mn | WW | WW | S2.AC70X.001 | AS4935G-952G25Mn VHP32AWW1 MC 9MGSHM256CEF 1*2G/250/6L/ 6R/ CB_n_FP_1.0D_HG_EN11for RO B sam | C2DP9500 |
| AS4935G-954G32Bn | AAP | Singapore | LX.AC90X.001 | AS4935G-954G32Bn VHP32ATSG1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_N_1.0D_HG_ZH31 | C2DP9500 |
| AS4935G-964G32Bn | AAP | Singapore | LX.AC90X.002 | AS4935G-964G32Bn VHP32ATSG1 MC 9MGSHM512CE 2*2G/320/BT/ 6L/6R/CB_N_1.0D_HG_ZH31 | C2DT9600 |

| Model | LCD | VGA Chip | VRAM 1 | Memory 1 | Memory 2 |
|-----------------|-------------|----------|--------|----------|----------|
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G25Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G25Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-581G32Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-582G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-582G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-582G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |

| Model | LCD | VGA Chip | VRAM 1 | Memory 1 | Memory 2 |
|-----------------|-------------|----------|--------|----------|----------|
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-583G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-591G25Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-592G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-592G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |

| Model | LCD | VGA Chip | VRAM 1 | Memory 1 | Memory 2 |
|-----------------|-------------|----------|--------|----------|----------|
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G16Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-593G50Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G16Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G25Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-731G25Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-732G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |

| Model | LCD | VGA Chip | VRAM 1 | Memory 1 | Memory 2 |
|------------------|-------------|----------|--------------------|----------|----------|
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-733G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-842G25Mn | NLED14WXGAG | UMA | N | SO2GBII6 | N |
| AS4935-843G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-843G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-861G25Mn | NLED14WXGAG | UMA | N | SO1GBII6 | N |
| AS4935-863G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO1GBII6 |
| AS4935-864G32Mn | NLED14WXGAG | UMA | N | SO2GBII6 | SO2GBII6 |
| AS4935G-581G16Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO1GBII6 | N |
| AS4935G-582G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-582G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-592G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-592G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-592G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-644G32Mi | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-644G32Mi | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-644G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-644G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-644G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-644G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |

| Model | LCD | VGA Chip | VRAM 1 | Memory 1 | Memory 2 |
|------------------|-------------|----------|---------------------|----------|----------|
| AS4935G-733G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-733G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-733G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-733G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-841G16Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO1GBII6 | N |
| AS4935G-842G16Mn | NLED14WXGAG | 9MGSHM | 256M-DDR2 (32*16*4) | SO1GBII6 | SO1GBII6 |
| AS4935G-842G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-842G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-842G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-862G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | N |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-863G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO1GBII6 |
| AS4935G-864G32Bn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-864G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-864G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-864G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-864G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |

| Model | LCD | VGA Chip | VRAM 1 | Memory 1 | Memory 2 |
|------------------|-------------|----------|---------------------|----------|----------|
| AS4935G-864G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-864G50Bn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-864G50Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-942G25Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO1GBII6 | SO1GBII6 |
| AS4935G-944G32Bn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-944G32Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-944G50Mn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-952G25Mn | NLED14WXGAG | 9MGSHM | 256M-DDR2 (32*16*4) | SO2GBII6 | N |
| AS4935G-954G32Bn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |
| AS4935G-964G32Bn | NLED14WXGAG | 9MGSHM | 512M-DDR2(64*16*4) | SO2GBII6 | SO2GBII6 |

| Model | HDD 1(GB) | ODD | Card Reader | WLAN | BT | Finger Print |
|-----------------|-------------|--------|-----------------|----------|--------|--------------|
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-581G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935-581G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935-581G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935-581G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935-582G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935-582G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935-582G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |

| Model | HDD 1(GB) | ODD | Card Reader | WLAN | BT | Finger Print |
|-----------------|-------------|--------|-----------------|----------|----|--------------|
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-583G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |

| Model | HDD 1(GB) | ODD | Card Reader | WLAN | BT | Finger Print |
|-----------------|-------------|--------|-----------------|----------|--------|--------------|
| AS4935-591G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-591G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-591G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-591G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-591G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935-592G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935-592G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-593G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935-593G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935-593G50Mn | N500GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935-731G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935-731G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-731G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-731G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935-731G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |

| Model | HDD 1(GB) | ODD | Card Reader | WLAN | BT | Finger Print |
|------------------|-------------|--------|-----------------|----------|--------|--------------|
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-644G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | N |
| AS4935G-731G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935G-731G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935G-731G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935G-731G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-732G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |

| Model | HDD 1(GB) | ODD | Card Reader | WLAN | BT | Finger Print |
|------------------|-------------|--------|-----------------|----------|--------|--------------|
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-733G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-841G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-842G16Mn | N160GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-842G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-842G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-842G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-862G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |

| Model | HDD 1(GB) | ODD | Card Reader | WLAN | BT | Finger Print |
|------------------|-------------|----------|-----------------|----------|--------|--------------|
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-863G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-864G32Bn | N320GB5.4KS | NBDCB2XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-864G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | N |
| AS4935G-864G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-864G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-864G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | BT 2.0 | AES1610 |
| AS4935G-864G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-864G50Bn | N500GB5.4KS | NBDCB2XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-864G50Mn | N500GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-942G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | N |
| AS4935G-944G32Bn | N320GB5.4KS | NBDCB2XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-944G32Mn | N320GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | N |
| AS4935G-944G50Mn | N500GB5.4KS | NSM8XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | AES1610 |
| AS4935G-952G25Mn | N250GB5.4KS | NSM8XS | 6 in 1-Build in | SP1x2MMW | N | AES1610 |
| AS4935G-954G32Bn | N320GB5.4KS | NBDCB2XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | N |
| AS4935G-964G32Bn | N320GB5.4KS | NBDCB2XS | 6 in 1-Build in | SP3x3MMW | BT 2.0 | N |

Test Compatible Components

This computer's compatibility is tested and verified by Acer's internal testing department. All of its system functions are tested under Windows® XP Home, Windows® XP Pro environment.

Refer to the following lists for components, adapter cards, and peripherals which have passed these tests. Regarding configuration, combination and test procedures, please refer to the Aspire 4935/4935G series Compatibility Test Report released by the Acer Mobile System Testing Department.

Microsoft® Windows® Vista Environment Test

| Vendor | Type | Description |
|-------------------------------|-----------------|---|
| Adapter | | |
| 10001081 DELTA | 65W | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB DFJ LED LF |
| 10001081 DELTA | 65W | Adapter DELTA 65W 19V 1.7x5.5x11 Yellow SADP-65KB BFJG LED LF |
| 60002015 HIPRO | 65W | Adapter HIPRO 65W 19V 1.7x5.5x11 Yellow HP-OK065B13 LV4 (for flicker issue) LED LF |
| 10001081 DELTA | 90W | Adapter DELTA 90W 19V 1.7x5.5x11 Blue ADP-90SB BBFA LV4 (for flicker issue) LED LF |
| 10001081 DELTA | 90W | Adapter DELTA 90W 19V 1.7x5.5x11 Blue ADP-90SB BBEN LV4, for OBL (for flicker issue) LED LF |
| 60002015 HIPRO | 90W | Adapter HIPRO 90W 19V 1.7x5.5x11 Blue HP-OL093B13P LV4 (for flicker issue) LED LF |
| Audio Codec | | |
| 9999995 ONE TIME VENDER | ALC268 | ALC268 |
| 9999995 ONE TIME VENDER | ALC888S | ALC888S |
| Battery | | |
| 10001063 SONY | 6CELL2.2 | Battery SONY AS-2007A Li-Ion 3S2P SONY 6 cell 4400mAh Main COMMON Normal Type |
| 60001535 PANASONIC | 6CELL2.2 | Battery PANASONIC AS-2007A Li-Ion 3S2P PANASONIC 6 cell 4400mAh Main COMMON PSS |
| 60002162 SIMPLO | 6CELL2.2 | Battery SIMPLO AS-2007A Li-Ion 3S2P PANASONIC 6 cell 4400mAh Main COMMON PSS |
| 60002162 SIMPLO | 6CELL2.2 | Battery SIMPLO AS-2007A Li-Ion 3S2P LGC 6 cell 2150mAh 2nd COMMON |
| 60001921 SANYO | 6CELL2.2 | Battery SANYO AS-2007A Li-Ion 3S2P SANYO 6 cell 4400mAh Main COMMON Normal Type |
| 60002162 SIMPLO | 6CELL2.2 | Battery SIMPLO AS-2007A Li-Ion 3S2P SAMSUNG 6 cell 4400mAh Main COMMON SDI 2.2mAh F type |
| Bluetooth | | |
| 9999995 ONE TIME VENDER | BT 2.0 | Foxconn FOX_BRM_2.0 |
| Camera | | |
| 9999995 ONE TIME VENDER | 1.0M DV | Suyin Camera 1.0M DV Tulip |
| Card Reader | | |
| 9999995 ONE TIME VENDER | 6 in 1-Build in | 6 in 1-Build in MS, MS Pro, SD, SC, XD, SDIO (For all) |
| CPU | | |
| 10001067 INTEL | C2DP9500 | CPU Intel Core2Dual P9500 PGA 2.53G 6M 1066 25W |

| Vendor | Type | Description |
|-------------------------------|-------------|---|
| 10001067 INTEL | C2DT5800 | CPU Intel Core2Dual T5800 PGA 2.0G 2M 800 MV, TJ, noVT |
| 10001067 INTEL | C2DT5900 | CPU Intel Core2Dual T5900 PGA 2.2G 2M 800 MV, TJ, noVT |
| 10001067 INTEL | C2DP8400 | CPU Intel Core2Dual P8400 PGA 2.26G 3M 1066 25W |
| 10001067 INTEL | C2DP8600 | CPU Intel Core2Dual P8600 PGA 2.4G 1066 25W 3M |
| 10001067 INTEL | C2DT9400 | CPU Intel Core2Dual T9400 PGA 2.53G 6M 1066 35W |
| 10001067 INTEL | C2DT9600 | CPU Intel Core2Dual T9600 PGA 2.8G 6M 1066 35W |
| 10001067 INTEL | C2DP7350 | CPU Intel Core2Dual P7350 PGA 2.0G 3M 1066 25W |
| 10001067 INTEL | C2DP7450 | CPU Intel Core2Dual P7450 PGA 2.13G 3M 1066 TJ, noVT |
| 10001067 INTEL | C2DT9550 | CPU Intel Core2Dual T9550 PGA 2.66G 6M 1066 35W E-0 |
| 10001067 INTEL | C2DT6400 | CPU Intel Core2Dual T6400 PGA 2.0G 3M 800 35W R-0 |
| 10001067 INTEL | C2DT6600 | CPU Intel Core2Dual T6600 PGA 2.2G 2M 800 35W R-0 |
| 10001067 INTEL | C2DP8700 | CPU Intel Core2Dual P8700 PGA 2.53G 3M 1066 25W R-0 |
| 10001067 INTEL | C2DP8600 | CPU Intel Core2Dual P8600 PGA 2.4G 3M 1066 25W R-0 |
| 10001067 INTEL | C2DP8400 | CPU Intel Core2Dual P8400 PGA 2.26G 3M 1066 25W R-0 |
| Finger Print Reader | | |
| 9999995 ONE TIME VENDER | AES1610 | Authentec AES1610 |
| HDD | | |
| 60002036 SEAGATE | N160GB5.4KS | HDD SEAGATE 2.5" 5400rpm 160GB ST9160310AS Crockett SATA LF F/W:0303 |
| 60001922 TOSHIBA DIGI | N160GB5.4KS | HDD TOSHIBA 2.5" 5400rpm 160GB MK1652GSX Virgo - BS SATA LF F/W:LV010J |
| 60002005 HGST SG | N160GB5.4KS | HDD HGST 2.5" 5400rpm 160GB HTS543216L9A300 Falcon-B SATA LF F/W:C40C |
| 60001994 WD | N160GB5.4KS | HDD WD 2.5" 5400rpm 160GB WD1600BEVT-22ZCTO ML160 SATA LF F/W:11.01A11 |
| 60002036 SEAGATE | N250GB5.4KS | HDD SEAGATE 2.5" 5400rpm 250GB ST9250827AS Corsair SATA LF F/W:3.AAA |
| 60001922 TOSHIBA DIGI | N250GB5.4KS | HDD TOSHIBA 2.5" 5400rpm 250GB MK2552GSX Virgo BS SATA LF F/W:LV010J |
| 60002005 HGST SG | N250GB5.4KS | HDD HGST 2.5" 5400rpm 250GB HTS543225L9A300 Falcon-B SATA LF F/W:C40C |

| Vendor | Type | Description |
|-------------------------------|-------------|--|
| 60001994 WD | N250GB5.4KS | HDD WD 2.5" 5400rpm 250GB WD2500BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11 |
| 60002036 SEAGATE | N320GB5.4KS | HDD SEAGATE 2.5" 5400rpm 320GB ST9320320AS Crockett SATA LF F/W:0303 |
| 60001922 TOSHIBA DIGI | N320GB5.4KS | HDD TOSHIBA 2.5" 5400rpm 320GB MK3252GSX Virgo BS SATA LF F/W:LV010J |
| 60002005 HGST SG | N320GB5.4KS | HDD HGST 2.5" 5400rpm 320GB HTS543232L9A300 Falcon-B SATA LF F/W:C40C |
| 60001994 WD | N320GB5.4KS | HDD WD 2.5" 5400rpm 320GB WD3200BEVT-22ZCT0 ML160 SATA LF F/W:11.01A11 |
| 60002036 SEAGATE | N500GB5.4KS | HDD SEAGATE 2.5" 5400rpm 500GB ST9500325AS Wyatt SATA LF F/W:0001SDM1 |
| 60001994 WD | N500GB5.4KS | HDD WD 2.5" 5400rpm 500GB WD5000BEVT-22ZAT0 ML250 SATA LF F/W:01.01A01 |
| Keyboard | | |
| 820123 DARFON | 15_16KB-FV1 | Keyboard 15_16KB-FV1 Kilimanjaro Standard Black (Glossy) |
| LAN | | |
| 9999995 ONE TIME VENDER | AR8121 | Atheros Lan AR8121 |
| LCD | | |
| 60003316 AUO | NLED14WXGAG | LED LCD AUO 14" WXGA Glare B140XW01 V0 0A LF 220nit 8ms 500:1 |
| 60002215 SAMSUNG | NLED14WXGAG | LED LCD SAMSUNG 14" WXGA Glare LTN140AT01-G01 LF 220nit 8ms 500:1 |
| 60003089 LG | NLED14WXGAG | LED LCD LPL 14" WXGA Glare LP140WH1-TLA1 LF 220nit 8ms 500:1 |
| 10001038 CMO | NLED14WXGAG | LED LCD CMO 14" WXGA Glare N140B6-L02 LF 220nit 8ms 400:1 |
| Memory | | |
| 60001993 NANYA | SO1GBII6 | Memory NANYA SO-DIMM DDRII 667 1GB NT1GT64UH8D0FN-3C LF 64*16 0.07um |
| 60002214 ELPIDA | SO1GBII6 | Memory ELPIDA SO-DIMM DDRII 667 1GB EBE11UE6ACUA-6E-E LF 64*16 0.065um |
| 60002215 SAMSUNG | SO1GBII6 | Memory SAMSUNG SO-DIMM DDRII 667 1GB M470T2864QZ3-CE6 LF |
| 60002045 HYNIX | SO1GBII6 | Memory HYNIX SO-DIMM DDRII 667 1GB HYMP112S64CP6-Y5 LF |
| 60001993 NANYA | SO2GBII6 | Memory NANYA SO-DIMM DDRII 667 2GB NT2GT64U8HD0BN-3C LF 128*8 0.07um |
| 60002214 ELPIDA | SO2GBII6 | Memory ELPIDA SO-DIMM DDRII 667 2GB EBE21UE8ACUA-6E-E LF 128*8 0.07um |
| 60002215 SAMSUNG | SO2GBII6 | Memory SAMSUNG SO-DIMM DDRII 667 2GB M470T5663QZ3-CE6 LF |
| 60002045 HYNIX | SO2GBII6 | Memory HYNIX SO-DIMM DDRII 667 2GB HYMP125S64CP8-Y5 LF |

| Vendor | Type | Description |
|-------------------------------|------------------------------|--|
| Modem | | |
| 23707801 FOXCONN TW | Fox+Con MC4Z 1.5_3.3V Aus | Foxconn Conexant -Unizion 1.5_3.3v AUS T60M955.0x |
| Norhtbridge | | |
| 10001067 INTEL | PM45 | NB Chipset Intel CS PM45NB |
| 10001067 INTEL | GM45 | NB Chipset Intel CS GM45NB |
| ODD | | |
| 610105 HLDS | NBDCB2XS | ODD HLDS BD COMBO 12.7mm Tray DL 2X CT10N LF W/ O bezel SATA |
| 10001063 SONY | NBDCB2XS | ODD SONY BD COMBO 12.7mm Tray DL 2X BC-5500S LF W/O bezel SATA |
| 10001070 PHILIPS | NBDCB2XS | ODD PLDS BD COMBO 12.7mm Tray DL 2X DS-4E1S LF W/O bezel SATA |
| 60001922 TOSHIBA DIGI | NSM8XS | ODD TOSHIBA Super-Multi DRIVE 12.7mm Tray DL 8X TS- L633A LF W/O bezel SATA |
| 610105 HLDS | NSM8XS | ODD HLDS Super-Multi DRIVE 12.7mm Tray DL 8X GT10N LF W/O bezel SATA |
| 10001063 SONY | NSM8XS | ODD SONY Super-Multi DRIVE 12.7mm Tray DL 8X AD- 7580S LF W/O bezel SATA |
| 10001070 PHILIPS | NSM8XS | ODD PLDS Super-Multi DRIVE 12.7mm Tray DL 8X DS- 8A2S LF W/O bezel SATA |
| Remote Control | | |
| 10001074 FORMOSA | RC804V-B | Formosa21 Remote Controller RC804V-B EN |
| 9999995 ONE TIME VENDER | RC803V | Fomosa21 RC803V For Vista |
| 10001074 FORMOSA | RC804V-B | Fomosa21 Remote Controller RC804V-B EU |
| 10001074 FORMOSA | RC804V-B | Formosa21 Remote Controller RC804V-B TC |
| 10001074 FORMOSA | RC804V-B | Formosa21 Remote Controller RC804V-B SC |
| Southbridge | | |
| 10001067 INTEL | ICH9M | SB Chipset Intel CS ICH9M |
| Software | | |
| 10000981 MISC | McAfee | Antivirus application McAfee |
| VGA Chip | | |
| 60001915 NVIDIA | 9MGSHM | NVIDIA 9MGSHM w/ HDCP |
| VoIP Phone | | |
| 10000286 WISTRON | BT VoIP Xpress | Wistron Acer Xpress Card Phone Kit Rev 2.0 |

| Vendor | Type | Description |
|-------------------------------|------------------------|---|
| VRAM | | |
| 10000981 MISC | 256M-GD2 | ODM 256M-GD2 256M GDDR2 |
| 10000981 MISC | 256M-DDR2 (32*16*4) | 256M-DDR2 32*16*4 |
| 10000981 MISC | 512M- DDR2(64*16*4) | 512M-DDR2 64*16*4 |
| WLAN | | |
| 10001067 INTEL | SP3x3MMW | Lan Intel WLAN 533AN_MMWG Shirley Peak MM#895362 |
| 10001067 INTEL | SP1x2MMW | Lan Intel WLAN 512AN_MMWG Shirley Peak 5100 MM#895361 |
| 10001067 INTEL | SP1x2MMW | Lan Intel WLAN 512AN_MMWG Shirley Peak 5100 non- FCC/IC |
| 10001067 INTEL | SP3x3MMW | Lan Intel WLAN 533AN_MMWG Shirley Peak 5300 non- FCC/IC |
| 9999995 ONE TIME VENDER | 3rd WiFi 1x2 BGN | Foxconn Wireless LAN Atheros AR5B91 1x2 BGN |
| 9999995 ONE TIME VENDER | 3rd WiFi 1x2 BGN | Foxconn Wireless LAN Wireless LAN Ralink RT2700E 1x2 BGN |

Online Support Information

This section describes online technical support services available to help you repair your Acer Systems.

If you are a distributor, dealer, ASP or TPM, please refer your technical queries to your local Acer branch office. Acer Branch Offices and Regional Business Units may access our website. However some information sources will require a user i.d. and password. These can be obtained directly from Acer CSD Taiwan.

Acer's Website offers you convenient and valuable support resources whenever you need them.

In the Technical Information section you can download information on all of Acer's Notebook, Desktop and Server models including:

- Service guides for all models
- User's manuals
- Training materials
- Bios updates
- Software utilities
- Spare parts lists
- TABs (Technical Announcement Bulletin)

For these purposes, we have included an Acrobat File to facilitate the problem-free downloading of our technical material.

Also contained on this website are:

- Detailed information on Acer's International Traveler's Warranty (ITW)
- Returned material authorization procedures
- An overview of all the support services we offer, accompanied by a list of telephone, fax and email contacts for all your technical queries.

We are always looking for ways to optimize and improve our services, so if you have any suggestions or comments, please do not hesitate to communicate these to us.

A

AFLASH Utility 42
Antennas 107

B

Battery Pack 54
BIOS Utility 29–42

- Boot 40
- Exit 41
- Navigating 29
- Onboard Device Configuration 36
- Power 38
- Save and Exit 41
- Security 35
- System Security 41

Bluetooth module 92
Board Layout

- Top View 169

brightness

- hotkeys 14

C

Camera Module 103
caps lock

- on indicator 10

Common Problems 146
computer

- on indicator 10

CPU 99

D

DIMM Module 60
Display 4
display

- hotkeys 14

E

EasyTouch Failure 159
Euro 15
External Module Disassembly

- Flowchart 53

F

Features 1
Fingerprint Reader Failure 160
Flash Utility 42
FPC Cable 106
FRU (Field Replaceable Unit) List 173

H

Hard Disk Drive Module 61
Hibernation mode

- hotkey 14

Hinge Covers 67
Hot Keys 12

I

Indicators 10
Intermittent Problems 162
Internal Microphone Failure 152
Internal Speaker Failure 150

J

Jumper and Connector Locations 169

- Top View 169

K

Keyboard 70
Keyboard Failure 149

L

LCD Bezel 101
LCD Brackets 106
LCD Failure 149
LCD Module Disassembly

- Flowchart 100

LCD Panel 104
lower cover 57

M

Main Unit Disassembly

- Flowchart 65

Mainboard 93
media access
 on indicator 10
MediaTouch Button Failure 159
Memory Check 146
MIC Module 108
Model Definition 184
Modem Module 91

N

No Display Issue 147
Notebook Manager
 hotkey 14
num lock
 on indicator 10

O

Online Support Information 229
optical drive module 63

P

Panel 5
 Bottom 9
 left 5
PC Card 10
Power On Failure 146

S

speakers
 hotkey 14
System
 Block Diagram 4

T

Test Compatible Components 223
Thermal Unit Failure 160
Top 169
touchpad
 hotkey 14
Touchpad Failure 150
Troubleshooting
 Built-in KB Failure 149
 EasyTouch Buttons 159
 Fingerprint Reader 160

Internal Microphone 152
Internal Speakers 150
LCD Failure 149
MediTouch Buttons 159
No Display 147
Other Failures 161
Power On 146
Thermal Unit 160
Touchpad 150
USB 157
WLAN 158

U

Undetermined Problems 162
USB Failure (Rightside) 157
utility
 BIOS 29–42

W

Windows 2000 Environment Test 224
Wireless Function Failure 158